

CAPITAL

WATERPROOF LAMINATE | 12 MM, +2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	9.5" Wide x 60" Long
Overall Thickness	14 mm (includes 2.0 mm EVA Pad)
Attached Pad	2.0 mm EVA Pad
Wear Surface	AC4 Rated
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	23.29 sf/ctn, 44 ctn/plt. 1024.8 sf/plt


Installation & Maintenance

Angle/Angle

Transition: Transition required for rooms larger than 66' W x 66' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.

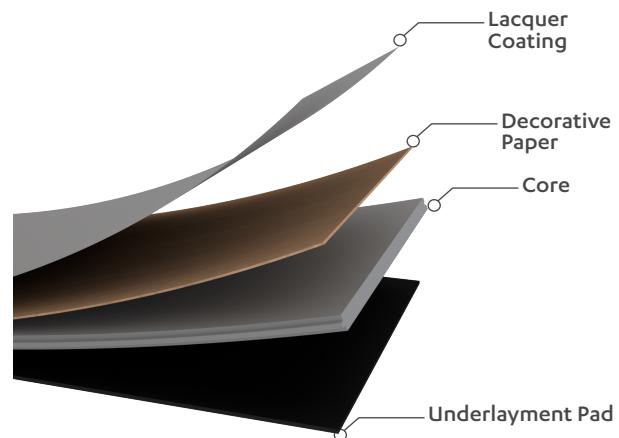

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradiant Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HICC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore® program by SCS Global Services
GreenGuard Gold
Adamantine Protection




Warranty

Waterproof, 15 Yr Light Commercial, 15 Yr Limited Multi-Family, Lifetime Residential


Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER