


PLATFORMS

LUXURY VINYL

GLUE DOWN CONSTRUCTION OPTIONS

Construction	Solid Luxury Vinyl
Classification	ASTMF 1700, Class III, Type B
Dimensions	6 x 36 inches, 6 x 48 inches, 7 x 48 inches, 7 x 60 inches, 9 x 60 inches
Overall Thickness	2.0 mm, 2.5 mm, 3.0 mm, or 5.0 mm
Attached Pad	N/A
Wear Layer	8 mil, 12 mil, 20 mil (28 mil, 30 mil) available on 3 mm or thicker
Finish Coat	UV Cured Polyurethane or Ceramic Bead Enhanced
Texture	Embossed
Edge Profile	Square Edge or Eased Edge
Packaging	Varies depending on above

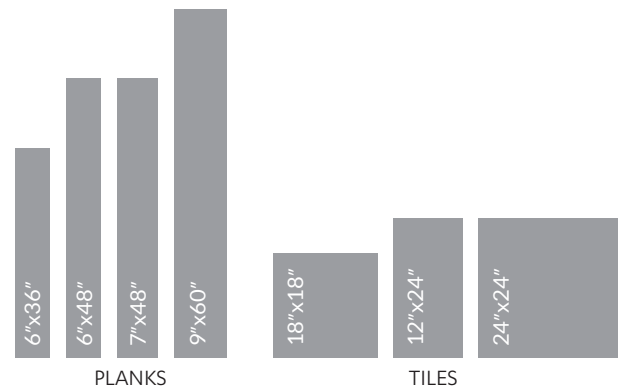

Installation & Maintenance

Glue Down	
Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit	
Maintenance: A neutral pH cleaner	
Recommended Adhesives: WF Taylor	<ul style="list-style-type: none"> - Dynamic, Transitional Pressure Sensitive - Pinnacle, Premium Traditional Pressure Sensitive - Resolute, Premium Multi-Functional Adhesive

GLUE DOWN STANDARD THICKNESS OPTIONS




WEAR LAYER THICKNESS OPTIONS



Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

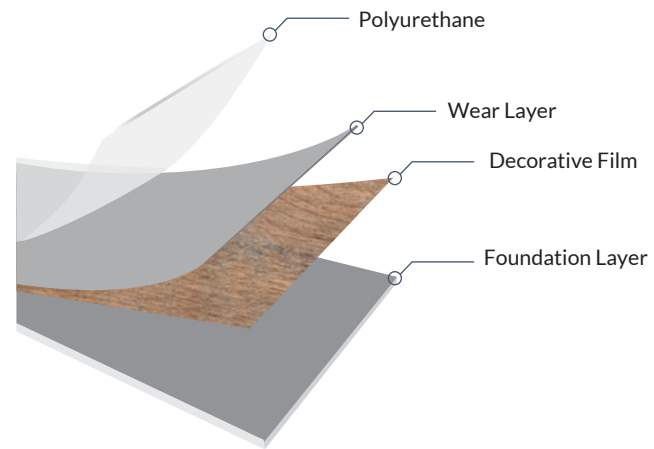

Health & Environmental

FloorScore SCS Certified
Phthalate Free

Warranty

Choose your warranty options; Adhesive, Primer, Sub-floor Leveling / Patch, Acoustical Underlay or no warranty.

