

## WATERPROOF LAMINATE, AC3 | 8.0 MM + 2.0 PAD

Construction	Waterproof Laminate
Classification	EN13329
Dimensions	7 3/4" Wide x 48" Long (195 mm x 1215 mm)
Overall Thickness	10 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm EVA Pad
Surface Finish	AC3 Rated
Texture	Low Gloss, Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	20.4 sf/ctn, 8 pcs/ctn, 30.6 lbs/ctn, 55 ctn/plt, 1122 sf/plt

### Installation & Maintenance

Angle/Angle, Float

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


### Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore® program by SCS Global Services

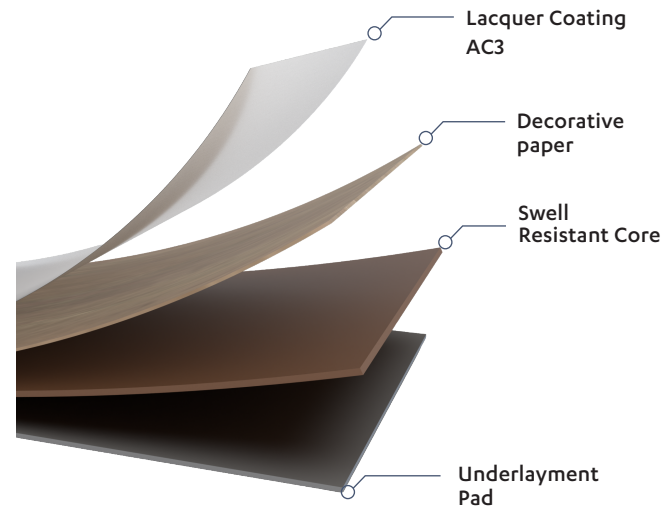

### Warranty


Waterproof, 5 Year Light Commercial, 5 Year Multifamily Common Areas, 25 Year Residential

### Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round, [QNose](#) Stair Nose

### Layout Options

NOT TO SCALE



ASHLAR



STAGGER