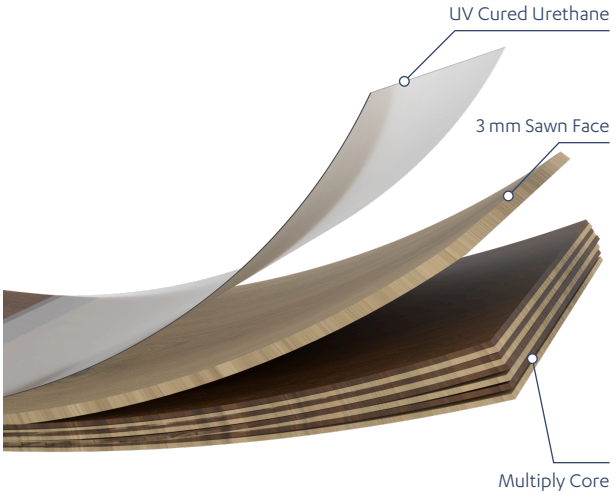
ALTA VISTA

TAS FLOORING

HARDWOOD | 5/8" THICK

Construction	Engineered Multi-Layer Parque
Species	Engineered European White Oak
Dimensions	7.5" Wide x Random Lengths up to 75"
Overall Thickness	5/8"
Attached Pad	N/A
Veneer Thickness:	3.0 mm Sawn-Cut Veneer over Multiply Core
Surface Finish	High Performance UV Cured Urethane
Design Feature	Thermal Enhanced, Brushed
Edge Profile	4-Sided Bevel
Packaging	23.5 sf/ctn, 50 ctn/plt, 1175 sf/plt



Installation & Maintenance

Glue/Float/Staple (Glue Assist)

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors.

Recommended Adhesive: Taylor Ironwood or Taylor Aspen or Fortane Glue Assist

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant

Warranty


10 Yr Light Commercial, 30 Yr Residential, Limited Lifetime Structural


Accessories

QNose Stair Nosing

Layout Options:

NOT TO SCALE


ASHLAR


STAGGER

floor score SCScertified

CARB PHASE 2 COMPLIANT

Multi-Length Planks

Thermal Enhanced

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

TAS CONTRACT