

LEVELS 5.0



LOOSE LAY | 5.0 MM, 20 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type A
Dimensions	Plank: 9.25" Wide x 59.25" Long, 234 mm x 1505 mm Tile: 18" Wide x 36" Long, 457.2 mm x 914.4 mm
Overall Thickness	5.0 mm (including non-skid backing)
Wear Layer	20 mil
Finish Coat	EnduraGuard
Texture	Embossed
Edge Profile	Beveled
Packaging	Plank: 22.84 sf/ctn, 64 ctn/plt, 1,461.76 sf/plt Tile: 27 sf/ctn, 36 ctn/plt, 972 sf/plt

Installation & Maintenance

Method: Loose Lay

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: A neutral pH cleaner, such as TAS Flooring Fresh Floors

Recommended Adhesives: - Dynamic, Transitional Pressure Sensitive, firm set
- Pinnacle, Premium Transitional Pressure Sensitive, hard set


Test Method & Requirements

Flexibility	ASTM F137	Pass
Thickness (with Pad)	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Change	ASTM F1514	Pass
Resistance to Light Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Static Coefficient of Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Static Load	ASTM E970	Pass>250 lbs
Peel Resistance	ISO 24345	Pass
IIC Rating		57

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing

Health & Environmental

FloorScore SCS Certified
Ortho-Phthalate

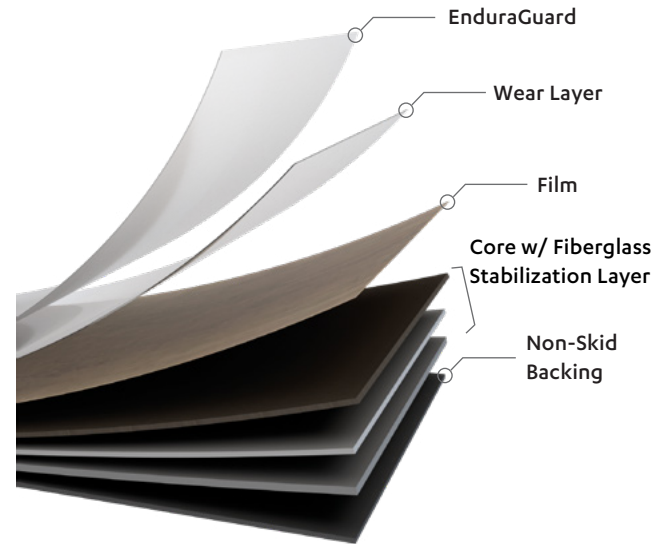

Warranty


10 Year Commercial

Accessories


[QNose](#) Stair Nose

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER