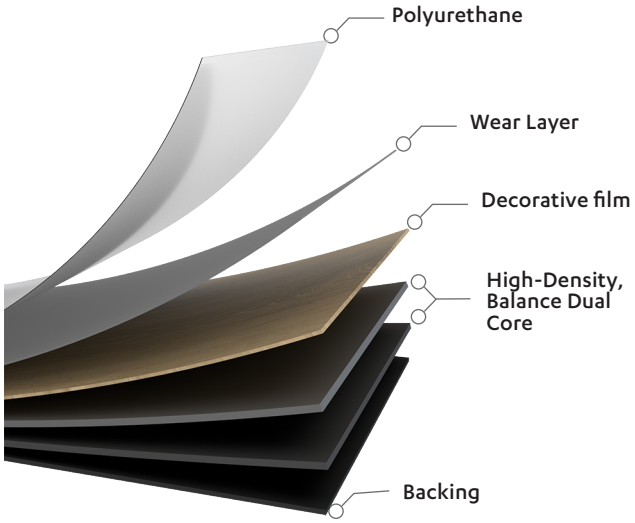
EXPEDITION

TAS FLOORING

GLUE DOWN | 2.0 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long, 177.8 mm x 1220 mm
Overall Thickness	2.0 mm
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Micro-Bevel
Packaging	35.023 sf/ctn, 15 pcs/ctn, 28.4 lbs/ctn, 2451.6 sf/plt, 70 ctn/plt



Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as Fresh Floors by TAS Flooring.

Recommended Adhesive: WF Taylor Dynamic, Uzin KE39.
For Heavy Loads use WF Taylor Pinnacle

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

Warranty


5 Years Light Commercial, 25 Years Multifamily Residence Units, 25 Years Residential


Accessories


QNose Stair Nosing


Layout Options:


NOT TO SCALE


HERRINGBONE


TRIPLE HERRINGBONE


FIVE PLANK PARQUET


ASHLAR


STAGGER

floor score SCScertified

PHTHALATE FREE

Hydronic Heat

Waterproof

Glue

TAS CONTRACT

Additional specifications, full installation instructions & warranty information available online at **TASCONTRACT.COM**

A division of T&A supply company, Inc.