

# AUDACITY BOUTIQUE <sup>®</sup>

The Fearless Waterproof Laminate Floor

## WATERPROOF LAMINATE | 10 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	*7.72" Wide x 47.76" Long, **5.67" Wide x 47.76" Long, ***6.57" Wide x 47.76" Long
Overall Thickness	12 mm (Includes 2.0 mm IXPE Pad)
Attached Pad	2.0 mm IXPE Pad attached
Surface Finish	AC4 Rated
Texture	4-Sided Painted, Waxed Bevel
Edge Profile	4-Sided Painted Bevel
Packaging	*15.371 sf/carton - 65 cartons/pallet - 999.1 sf/pallet **13.186 sf/carton - 66 ctn/plt, 870.27 sf/plt ***15.296 sf/carton - 55 ctn/pallet, 841.28 sf/plt

### Installation & Maintenance

Angle / Drop & Tap

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40

### Test Method & Requirements


Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore SCS Certified

Carb Phase II Compliant

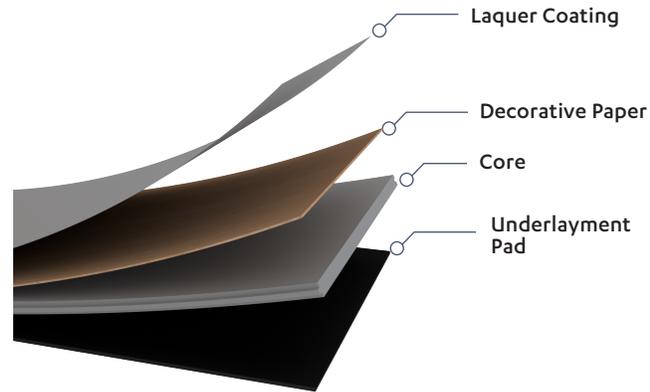

### Warranty


Waterproof, 15 Year Light Commercial, Lifetime Residential

### Accessories


Quarter Round, Reducer, Stair nose, T-Mold, [QNoise](#) Stair nose

### Layout Options:

NOT TO SCALE

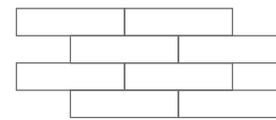

ASHLAR

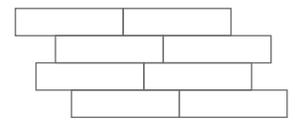

STAGGER