

TANDEM CLASSIC



EVC | 7.5 MM, 20 MIL

Construction	Engineered Vinyl Click (EVC) Waterproof Core
Classification	ASTMF F3261, Class III, Type B
Dimensions	5.75" Wide x 48" Long, 146 mm x 1217 mm
Overall Thickness	7.5 mm (includes 2.0 mm EVA pad)
Attached Pad	2.0 mm EVA Sound Abatement Pad
Wear Layer	20 mil
Finish Coat	Low Gloss, Polyurethane, Super Protect Coating
Texture	Embossed
Edge Profile	4-Sided Micro Bevel
Packaging	15.3 sf/ctn, 84 ctn/pal, 1285.2 sf/plt, 27 lbs/ctn

Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition required for rooms larger than 26' W x 36' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Phthalate-Free

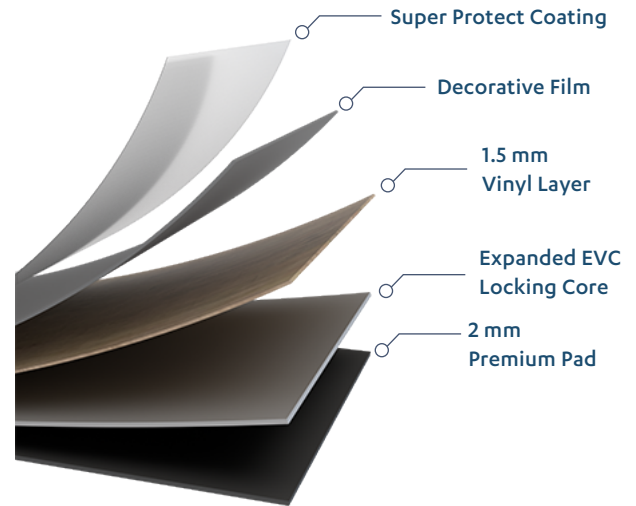

Warranty


10 Year Commercial, 10 Year Multi-Family, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER

