

SPC | 6.0 MM, 12 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	12" Wide x 24" Long (300 mm x 600 mm)
Overall Thickness	6.0 mm (Includes 1.0 mm Pad)
Attached Pad	1.0 mm
Wear Layer	12 Mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	19.375 sf/ctn, 10 pcs/ctn, 41.3 lbs/ctn, 54 ctn/plt, 1046.25 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room Size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified

Phthalate Free

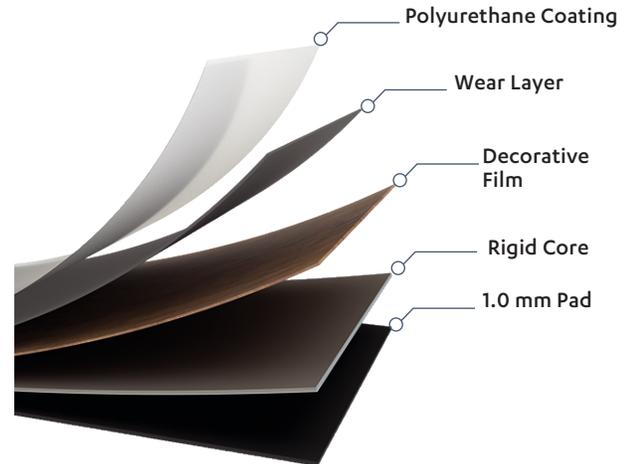

Warranty


5 year Light Commercial, 5 year Multifamily, 25 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

Layout Options

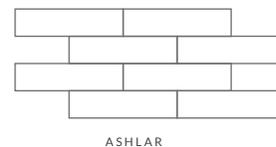

ASHLAR



STAGGER

