



# PATAGONIA

LSPC ABA | 7.5 MM, 20 MIL

**TAS**  
CONTRACT

[TASCONTRACT.COM](http://TASCONTRACT.COM)

# PATAGONIA

LSPC ABA | 7.5 MM, 20 MIL



## LITECORE ABA CONSTRUCTION

The Patagonia Collection features Litecore ABA technology, offering a lightweight yet robust core that provides excellent stability and moisture resistance.



## REALISTIC WOOD VISUALS

The Patagonia Collection offers a stunning wood-like appearance with a low gloss finish that highlights the grain details. Enhanced by Embossed-In-Register (EIR) texture and a pressed bevel edge, each plank provides a highly realistic and natural wood effect.



## ADAMANTINE FINISH™

Equipped with Adamantine Finish™ and anti-microbial properties, the Patagonia Collection provides excellent defense against scratches, stains, and microbial growth. These visual features, combined with wide and long planks, enhances the sense of space and style.



## WATERPROOF PERFORMANCE

Designed with waterproof technology, the Patagonia Collection delivers reliable performance in environments where surface moisture resistance is essential. This feature ensures durability and ease of maintenance, making it a practical choice for various commercial applications.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNoise Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**CASCADE**  
LUXURY VINYL

WILSPC0702  
7.5 MM | 20 MIL



**HALIFAX**  
LUXURY VINYL

WILSPC0703  
7.5 MM | 20 MIL



**LIVINGSTON**  
LUXURY VINYL

WILSPC0704  
7.5 MM | 20 MIL



**RIVERSIDE**  
LUXURY VINYL

WILSPC0705  
7.5 MM | 20 MIL



**TAMARAC**  
LUXURY VINYL

WILSPC0706  
7.5 MM | 20 MIL



**WIND RIVER**  
LUXURY VINYL

WILSPC0708  
7.5 MM | 20 MIL



**GLACIER BAY**  
LUXURY VINYL

WILSPC0707  
7.5 MM | 20 MIL



**CAMELBACK**  
LUXURY VINYL

WILSPC0709  
7.5 MM | 20 MIL

## ABA LSPC | 7.5 MM, 20 MIL

|                   |                                                                   |
|-------------------|-------------------------------------------------------------------|
| Construction      | LSPC Rigid Core, Light Stone Polymer Composite                    |
| Classification    | ASTM F3261                                                        |
| Dimensions        | 9" Wide x 60" Long, 226 mm x 1517 mm                              |
| Overall Thickness | 7.5 mm (includes 1.5 mm pad)                                      |
| Attached Pad      | 1.5 mm IXPE Pad                                                   |
| Wear Layer        | 20 mil                                                            |
| Finish Coat       | Adamantine Finish™                                                |
| Texture           | Embossed-In-Register                                              |
| Edge Profile      | 4-Sided Pressed Bevel                                             |
| Packaging         | 29.52 sf/ctn, 8 pcs/ctn, 53.3 lbs/ctn, 40 ctn/plt, 1,180.8 sf/plt |

### Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50)  
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, TAS Flooring Fresh Floors


### Test Method & Requirements

|                                                 |                  |                  |
|-------------------------------------------------|------------------|------------------|
| Resilient Floor in Modular Format               | ASTM F3261       | Pass             |
| Thickness (with Pad)                            | ASTM F386/ (387) | Pass             |
| Wear Layer Thickness                            | ASTM F410        | Pass             |
| Stain/Chemical Resistance                       | ASTM F925        | Pass             |
| Resistance to Heat Color Change                 | ASTM F1514       | Pass             |
| Resistance to Light Color Change                | ASTM F1515       | Pass             |
| Residual Indentation                            | ASTM F1914       | Pass             |
| Size & Squareness                               | ASTM F2055       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ASTM F2199       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ISO 23999        | Pass             |
| Determination of Geometrical Characteristics    | ISO 24337        | Pass             |
| Static Coefficient of Friction Polished Surface | ASTM D2047       | Exceeds Standard |
| Static Load Limit                               | ASTM F970        | PASS >250 LBS    |
| Flammability/Radiant Flux                       | ASTM E648        | Class I          |
| Smoke Density                                   | ASTM E662        | Pass             |
| Impact Insulation Class IIC                     | ASTM E492*       |                  |
| Sound Transmission Class STC                    | ASTM E90*        |                  |

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore® program by SCS Global Services  
Phthalate-Free

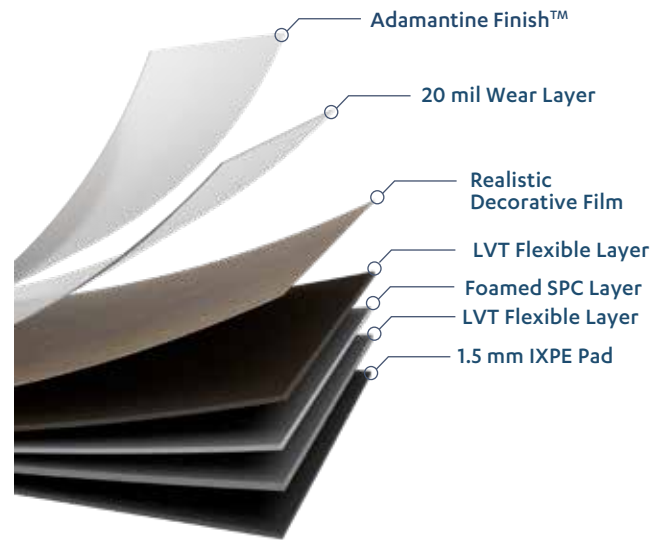

### Warranty


10 year Light commercial, 10 year Multifamily, 30 year residential

### Accessories


Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

### Layout Options:



ASHLAR



STAGGER

TAS

CONTRACT

TASCONTRACT.COM

PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.