

## SPC | 5.0 MM, 12 MIL

Construction	SPC Rigid Waterproof Core Vinyl Click
Classification	ASTM F3261
Dimensions	7" Wide x 48" Long, 182 mm x 1220 mm
Overall Thickness	5.0 mm (includes 1.0 mm IXPE Pad)
Attached Pad	1.0 mm IXPE Sound Abatement Pad
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Micro Bevel
Packaging	28.68 sf/ctn, 12 pcs/ctn, 48.5 lbs/ctn, 55 ctn/plt, 1577.4 sf/plt

### Installation & Maintenance

Angle / Angle

Layout Room size: Minimum expansion space to all vertical substrates 1/4"  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


### Test Method & Requirements

Resilient Floor in Modular Format	ASTM F3261	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Static Load	ASTM F970	>250
Static Load Limit	ASTM F970	0.005 in or less 2,000 psi
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore SCS Certified  
Phthalate free

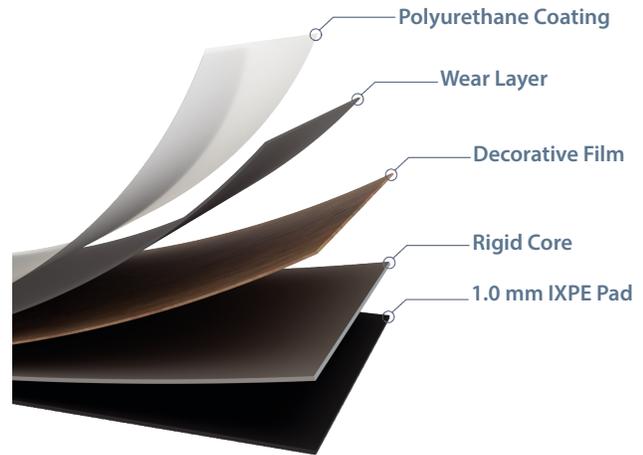

### Warranty


5 Year Light Commercial, 25 Year Multifamily (units), 5 Year Multifamily (common areas) & 25 Year Residential

### Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

### Layout Options:



ASHLAR



STAGGER