



distributed by



T&A supply company, Inc.

iQ Optima & Melodia

iQ Optima surface treatment: Proprietary iQ Technology

- Requires no wax or refinishing for the life of the floor

Melodia surface treatment: UV-Cured Polyurethane

Total thickness: 0.080" (2mm), 6'6" Wide

Installation method: Glue-Down.

Chemical Weld or Heat Weld

FloorScore Certified

Certified Asthma & Allergy Friendly


iQ Optima: Limited 20-Year Warranty

Melodia: Limited 10-Year Warranty

Homogeneous Sheet Stocking Program

COLOR NUMBER	SOLID WELD ROD	MULTI-COLOR WELD ROD
853	1292388	1290022
860	1287039	1290066
862	1291862	1290025
864	1287412	1290029
873	1287524	1290122
874	1287840	1290338
701	1287837	1290356
965	1287638	1290237

iQ Optima

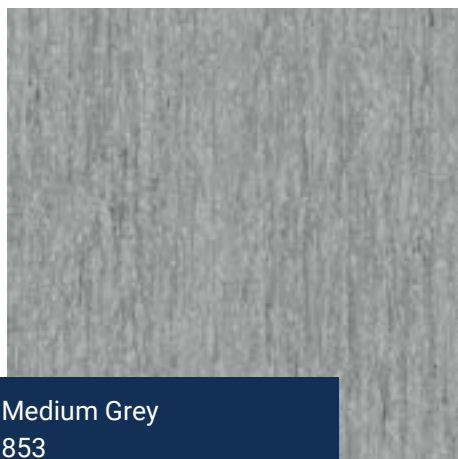


Medium Grey
853




Grey Sand
860




White
862

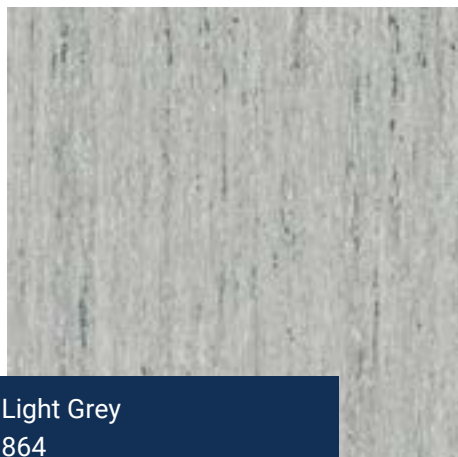

Light Grey
864

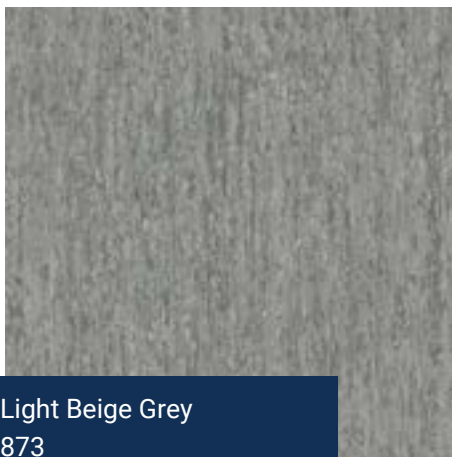

Light Beige Grey
873

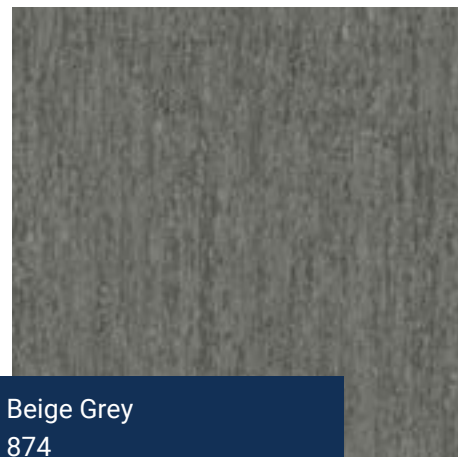

Beige Grey
874



Melodia

distributed by



CONTRACT

T&A supply company, Inc.



Dove Grey
701



Grey Matter
965

RollSmart™

RollSmart is a solvent-free, easy-to-apply adhesive specifically formulated for installing iQ Optima and Melodia.

RollSmart Flooring adhesive is an environmentally friendly, non-toxic and non-flammable intelligent adhesive option enabling immediate occupancy, an important benefit for healthcare, education, retail and other environments where foot traffic and rolling traffic are prevalent.

The adhesive is applied using a 3/8" nap paint roller and dries quickly to facilitate fast installation times. RollSmart eliminates trowel marks telegraphing and is approved for use under hospital beds.

Technical Data	Standards	RollSmart Flooring Adhesive
Adhesive Type		Acrylic
Appearance		Light Blue
Odor		Sweet Mild Odor
Flash Point		> 212°F
NFPA 704 Flammability Rating		0 - Non-flammable
Storage		Store Between 50°F & 120°F
Shelf Life		2 Years (If unopened)
Open Time		10-15 Minutes
Working Time		2 Hours
VOC Content		< 0.0 g/ml Calculated
Foot traffic, rolling traffic, and furniture placement permitted		Immediately After Installation
pH Tolerance ASTM F710		7.0-10.0 pH
Substrate Moisture Tolerance	ASTM F2170 ASTM F1869	95% RH 8 lbs. per 1,000 ft.2/24 hrs.
Underfloor Heating Systems		Yes
Please visit www.tarkett.com for the most updated specifications, installation and maintenance instructions.		

COVERAGE:
All flooring types listed porous & non-porous surfaces

3/8" Nap Paint Roller
(w/ a paint tray & a provided wet film thickness gauge); not to exceed 350-400 sq. ft. per gallon

Sustainability Facts

To learn more, visit www.tarkett.com.

RollSmart	LEED Credits Contribution
Construction Waste Management ReStart® Reclamation Program MR 2	1-2
Material Reuse Supports Reuse & Recycling of Flooring MR 3	1-2
Regional Materials Manufactured in Dalton, GA - an ISO 9001 Facility MR 5	1-2
People-Friendly Spaces Low-emitting Materials IEQ 4.1 Adhesives, FloorScore™ Certified & Meets CA 01350	1
Return On Investment Requires fewer man hours to install. Allows immediate post installation occupancy.	

RollSmart Advantages

For Use Under Hospital Beds	✓
Eliminates Trowel Marks	✓
Heat Weld Immediately	✓
Increased Limits for Moisture and pH	✓
Supports Reuse and Recycling of Flooring	✓
Immediate Traffic After Installation, Including Rolling Loads	✓