TENACITY

TAS FLOORING

GLUE DOWN | 2.5 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	2.5 mm
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 2100 sf/ctn, 60 ctn/plt

Installation & Maintenance

Glue Down - WF Taylor Pinnacle adhesive required

Expansion & Transition: Temperature range of 59°F - 95°F

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental


FloorScore Certified

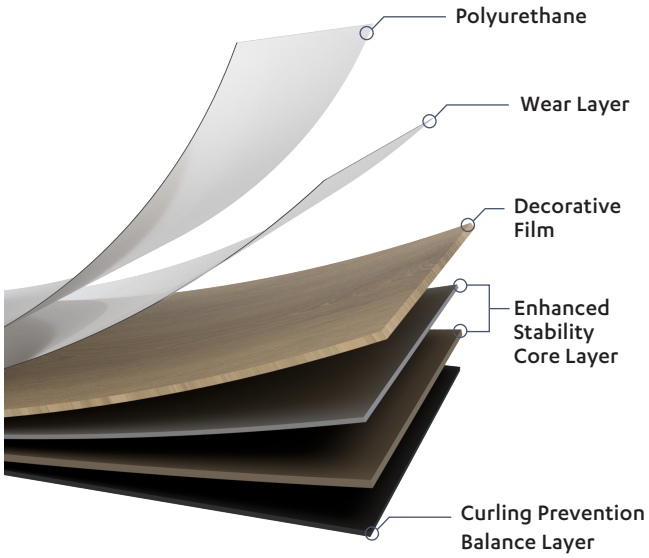


Warranty & Maintenance

5 Yr Light Commercial/Multifamily Common Areas, 25 Yr Residential/Multifamily Residence

Layout Options:

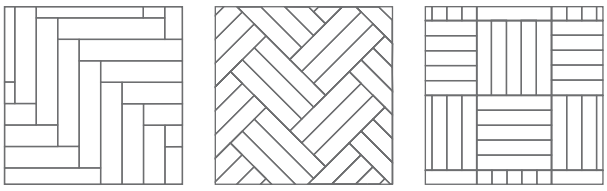

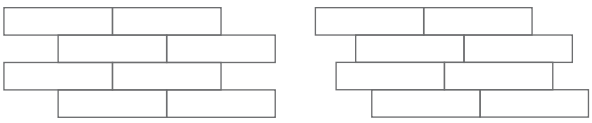

floor score
SCScertified

PHTHALATE FREE

Glue

Hydronic Heat

TAS CONTRACT

Additional specifications, full installation/maintenance and warranty information available online at **TASCONTRACT.COM**.

A division of T&A supply company, Inc.