

SILENT STRIDE



SPC | 8.5 MM, 20 MIL

| | |
|-------------------|--|
| Construction | SPC Rigid Core, Stone Polymer Composite |
| Classification | ASTM F3261, Class 1, Type B, Grade 1, Class B |
| Dimensions | 9" Wide x 60" Long, 225 mm x 1,422 mm |
| Overall Thickness | 8.5 mm (Includes 1.0 mm Pad) |
| Attached Pad | 1.0 mm IXPE |
| Wear Layer | 20 Mil |
| Finish Coat | Adamantine Finish™ Scratch, Stain, Wear Resist |
| Texture | Embossed |
| Edge Profile | 4-Sided Micro Bevel |
| Packaging | 14.53 sf/ctn, 4 pcs/ctn, 41 lbs/ctn, 56 ctn/plt, 813.68 sf/plt |

Installation & Maintenance

Angle / Angle

Layout Room Size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.


Test Method & Requirements

| | | |
|---|---------------|---------|
| Resilient Floor in Modular Format | ASTM F3261 | Pass |
| Thickness (with Pad) | ASTM F386/387 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability | ASTM F2199 | Pass |
| Dimensional Stability w/Exposure to Heat | ISO 23999 | Pass |
| Determination of Geometrical Characteristics | ISO 24337 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Impact Insulation Class IIC | ASTM E492* | |
| Sound Transmission Class STC | ASTM E90* | |

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services
Phthalate Free

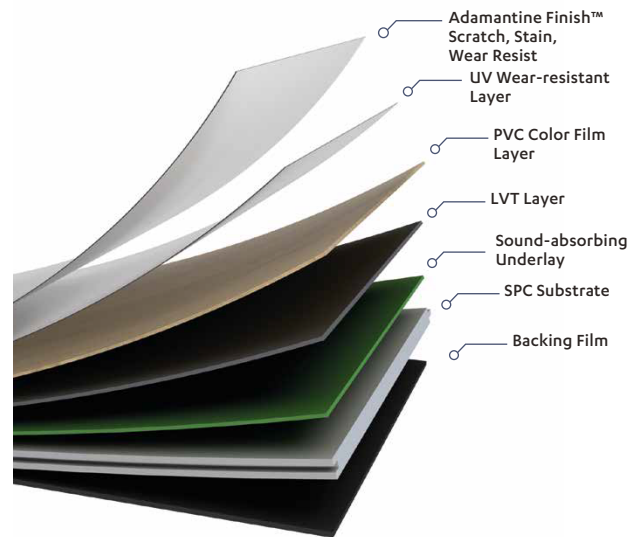

Warranty

10 Year Light Commercial, 10 Year Multifamily, 30 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNose](#) Stair Nosing

Layout Options

