

DONNINGTON

LOOSE LAY | 4.5 MM, 20 MIL

Construction	Luxury Vinyl Tile
Dimensions	9.25" Wide x 60.25" Long 234.95 mm x 1530.35 mm
Overall Thickness	4.5 mm
Wear Layer	20 mil
Finish	Polyurethane
Texture	Embossed
Edge Profile	4-Sided micro bevel

Installation & Maintenance

DropFit Loose Lay with perimeter adhesive or Full Spread Adhesive

Transition: Transition required for rooms larger than 45' W x 45' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Neutral PH Cleaner

Test Method & Requirements

Critical Radiant Flux	ASTM E648	Class I
Surface Flammability	DOC FF 1-70	Pass
Coefficient of Friction	ASTM 2047	Pass >0.6
Sound Transmission Class (STC)	ASTM E90	63
Impact Insulation Class (IIC)	ASTM E492	70
High Frequency Impact Insulation Class(HIIC)	ASTM E3222	90


*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

Floorscore SCS Certified

Phthalate-Free


100% Virgin Material

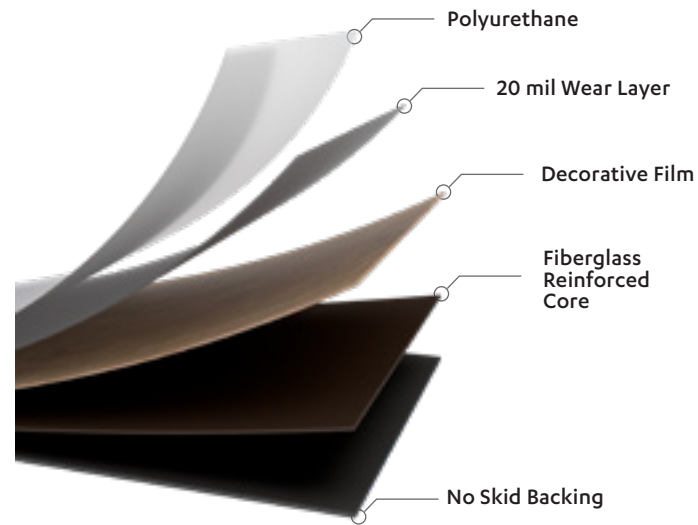


Warranty

20-Year Commercial Wear, Lifetime Waterproof,
Lifetime Residential Wear

Layout Options:



ASHLAR



STAGGER

