

RITOMARKET™



UNICORK 2 COLLECTION

UNICORK 2 CORK TILES

Unicork 2 has exceptional physical properties including acoustical and thermal insulation, durability, resistance to mold and mildew, naturally hypo-allergenic, and easy to clean. Because of the natural air filled structure of the cork core, the tiles have excellent resilience with inherent sound absorbing qualities, as well as a cushioned feel under foot. Unicork 2 floors are unique, quiet, comfortable and environmentally sensitive. Manufactured from the bark of cork trees, Unicork 2 is nature's gift for a beautiful, functional and long-lasting floor.

*See installation manual for full listing

FEATURES AND BENEFITS

Easy to clean

Cork is a green, renewable and natural resource

Provides acoustical and thermal insulation, durability, resistance to mold and mildew

Excellent resilience with inherent sound absorbing qualities

Cushioned underfoot

Exceeds ADA for slip resistance

Naturally hypo-allergenic

Benefits Unique To Unicork 2

All floor and wall products come with adhesive applied to the back of individual tiles

All floor products come with two coats of lacquer applied in manufacturing (requiring only one coat on site for commercial rating).

Adhesive and final lacquer necessary as well as application tools are included in pricing from To Market

Custom Colors and Sizes Available on all Floor and Wall Products - See Your To Market Representative for Details

LEED CREDIT	DESCRIPTION	PRODUCT QUALIFICATIONS	POINTS
Materials & Resources Credit 6: Rapidly Renewable Materials	Use rapidly renewable materials for 2.5% of total value of all materials & products used, based on cost	Cork qualifies as a rapidly renewable resource	1 Point
IEQ Credit 4.1 Low-Emitting Materials Adhesives & Sealants	Must comply with SCAQMD Rule #1168	Uses low-VOC adhesive that complies with SCAQMD Rule #1168	1 Point
EQ CREDIT 4.4 Environmental Quality	Must contain no added urea-formaldehyde resins	Product contains no added urea-formaldehyde	1 Point

ORDERING PROCESS

1. Select the style. There are ten floor tile options and four wall tile options.
2. Select the thickness.

Floor Tile – 4mm square edge is standard stocking floor products (*Floor tile is available in 5mm as a special order)
5mm comes standard is with bevel edge but can be customized as a square edge or with 1,2,3 or all 4 sides beveled

Wall Tile – 3mm square edge is standard for stocking wall products. Wall product available in both stained/finished as well as unsanded/unfinished options.

3. Select the color – all ten floor and all four wall tile options are available in all nineteen colors.

WALL TILES

ORDER SAMPLES



Finished TMUW 25 Cerros — 70 Natural Unfinished



Finished TMUW 22 Columnas — 70 Natural Unfinished



Finished TMUW 23 Metta — 70 Natural Unfinished



Finished TMUW 21 Kroma — 70 Natural Unfinished




TMU 20 Lava — 70 Natural

ORDER SAMPLE




TMU 21 Kroma — 70 Natural

ORDER SAMPLE

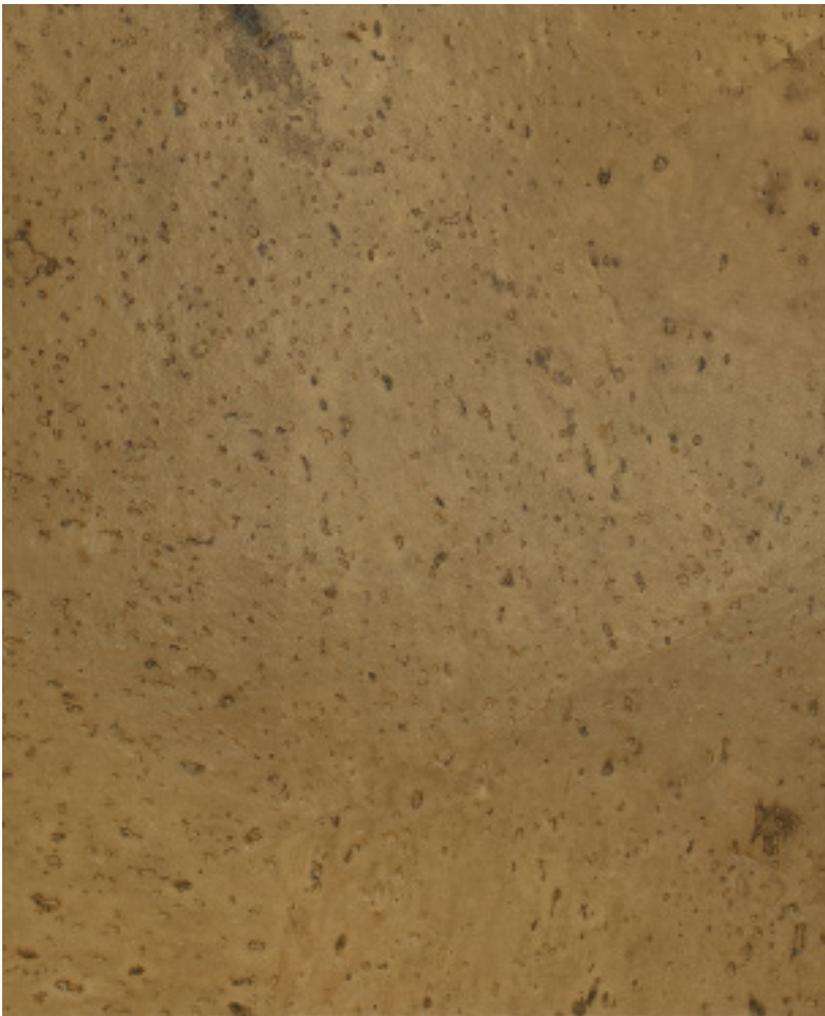

TMU 23 Metta — 70 Natural

ORDER SAMPLE

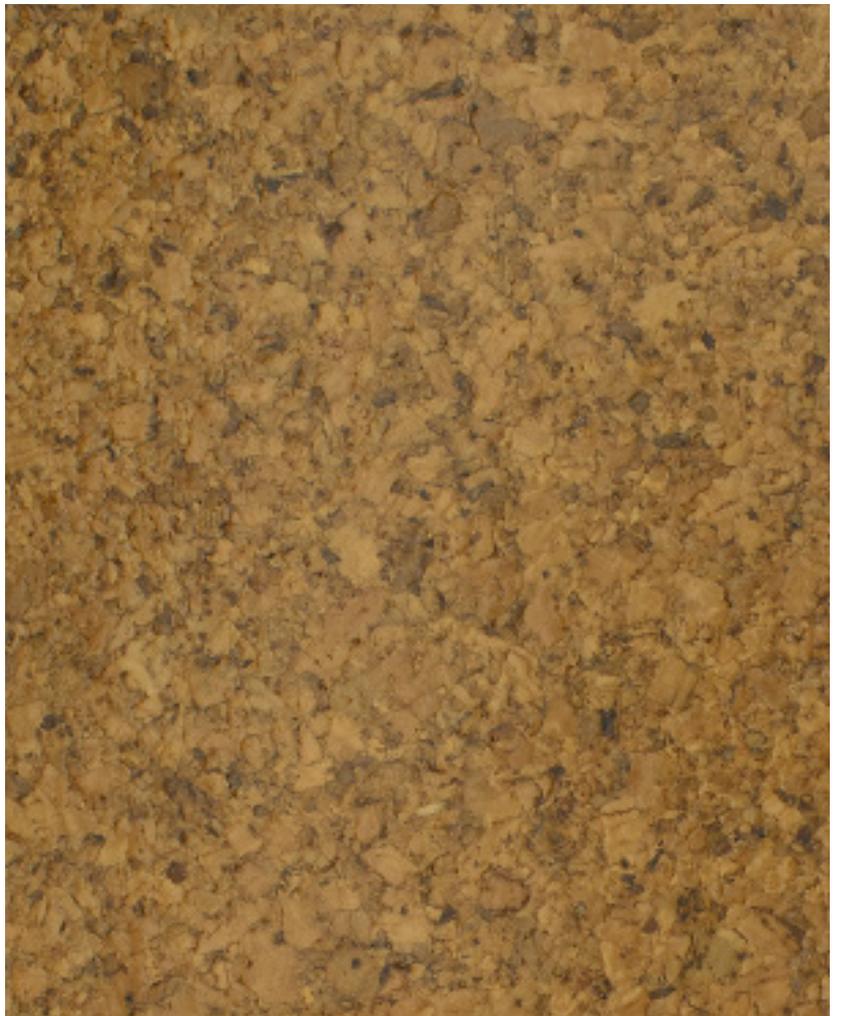

TMU 30 Terra — 70 Natural

ORDER SAMPLE



TMU 18 Bamboe — 70 Natural

ORDER SAMPLE



TMU 19 Zebrano — 70 Natural

ORDER SAMPLE



TMU 26 Parallel — 70 Natural

ORDER SAMPLE




TMU 24 Linea — 70 Natural

ORDER SAMPLE



TMU 22 Colunas — 70 Natural

ORDER SAMPLE

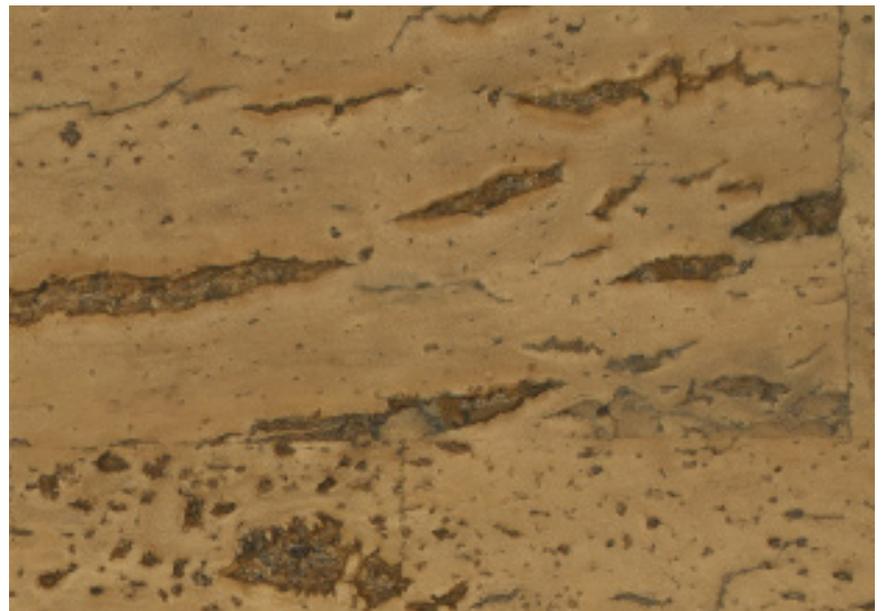

TMU 25 Cerros — 70 Natural

ORDER SAMPLE



50 Ivory

ORDER SAMPLE



53 Blond

ORDER SAMPLE



56 Brown

ORDER SAMPLE



51 Ash

ORDER SAMPLE



54 Walnut

ORDER SAMPLE



57 Teak

ORDER SAMPLE



52 Hickory

ORDER SAMPLE



55 Cognac

ORDER SAMPLE



58 Kolonial

ORDER SAMPLE



59 Geology

ORDER SAMPLE



62 Metallic Marsh

ORDER SAMPLE



65 Atlantic

ORDER SAMPLE



60 Brick

ORDER SAMPLE



63 Yellow

ORDER SAMPLE



66 Steel Blue

ORDER SAMPLE



61 Antique Grey

ORDER SAMPLE



64 Ebony

ORDER SAMPLE



67 Silverado

ORDER SAMPLE

UNICORK 2 SPECIFICATIONS

COMPOSITION:	Bark of cork trees, a renewable and natural resource	COEFFICIENT OF FRICTION:	ASTM-C1028-89 Exceeds ADA Requirements – .64 Dry, .47 Wet
BASIX COLLECTIONS:	Kroma, Metta, Lava, Terra	CRITICAL RADIANT FLUX:	ASTM F-137-08 Class II – Passes .32 watts cm ² (NFPA 253/ FTM Standard 372)
MATRIX COLLECTIONS:	Linea, Parallel, Zebrano, Bamboe, Colunas, Cerros	SMOKE DENSITY:	ASTM-E-662-97, Passes – <450 (NFPA 258)
TILE SIZE:	23.63" x 11.82", (60cm x 30cm)	LEXIBILITY OF RESILIENT FLOORING MATERIALS:	Requires no wax, no stripping, no buffing or toxic seal coat
GAUGE:	4.0mm square edge 5.0mm with bevel edge available as special order Wall tile - 3.0mm square edge	IMPACT SOUND INSULATION ACOUSTICAL TESTING:	ASTM E492, IIC – Passes
TALL WALL BASE:	Approximately 2 1/8" high x 3/8" thick x 46 7/8" long	SHORT-TERM INDENTATION AND RESIDUAL INDENTATION OF RESILIENT FLOOR COVERING:	ASTM F1914 – Passes
SLIM WALL BASE:	Approximately 3 1/2" high x 3/8" thick x 46 7/8" long	RESILIENT, TEXTILE AND LAMINATE FLOOR COVERINGS - CASTOR CHAIR TEST:	ISO 4918 – Passes
DURABILITY/ COMFORT:	Natural air filled cellular structure, suited for high traffic. Allows for a cushioned feel under foot while maintaining its tough commercial performance.	LAMINATE FLOOR COVERINGS - DETERMINATION OF ABRASION RESISTANCE:	ISO 24338 (A) – Passes
NOISE REDUCTION:	Reduces footfall noise due to unique vibration dampening and inherent sound attenuation qualities.	SOUND ABSORPTION:	EN 15102:2007 (A1:201) – Passes
PHYSICAL PROPERTIES:	Acoustical and thermal insulation, resistance to mold and mildew, naturally hypo-allergenic, and easy to clean.	MOISTURE CONTENT OF WOOD:	ASTM D4442 – > 4%
WARRANTY:	Unicork 2® warrants its cork floor tiles to be free from manufacturer defects. 5 Year Commercial Warranty 10 Year Residential Warranty	DIMENSIONAL STABILITY AND CURLING PROPERTIES OF RESILIENT FLOOR TILE AFTER EXPOSURE TO HEAT:	ASTM F2199 – Passes Length: -0.012" per 12" (0.10%), Width -0.015" per 12" (0.13%) Initial Curl - 0.03", Final Curl - 0.14"
		STATIC LOAD LIMIT (MODIFIED):	Specified Load 250 psi - Residual Compression 0.005" Specified Load 300 psi - Residual Compression 0.006"
		RESISTANCE TO CHEMICALS:	ASTM F925-02 – No surface dulling, surface attack, color change (5% acetic acid, 70% isopropyl alcohol, mineral oil, 5% hydrochloric acid, 5% ammonia, bleach, 5% phenol, gasoline, sulfuric acid, kerosene, olive oil) Severe change - 5% sodium hydroxide

See Unicork 2® Installation, Maintenance & Warranty Guide for details:
www.tomkt.com

© 2020 To Market



Due to manufacturing tolerances, color and texture may vary slightly from samples shown.

To view coordinates and for larger samples, please visit our web site, www.tomkt.com, or call customer service at (866) 772-4772

FlorLab

Visit the FlorLab to see your rooms with our floors.

Simply upload a photo of your room and click through our collections to see what it would look like.

Click to Visit FlorLab