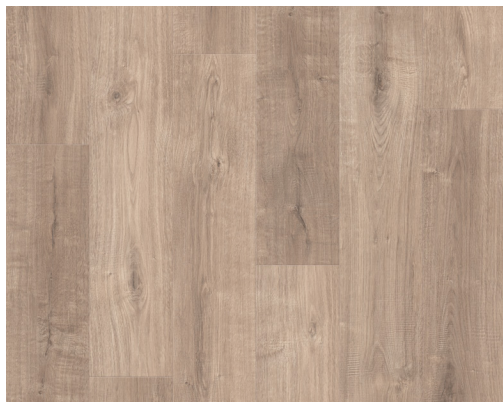
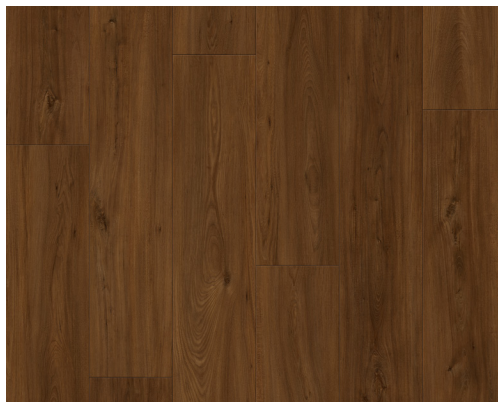
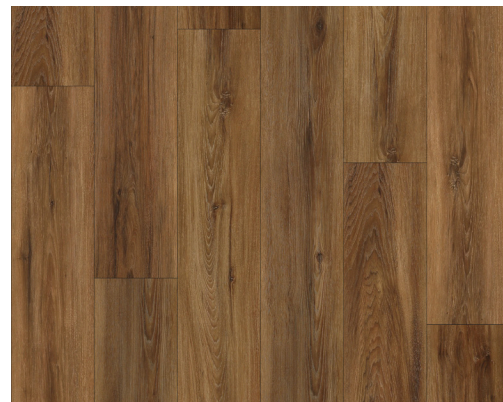


LAMINATE 12 MM + 2 MM EVA ATTACHED PAD

**Topeka** | SCLA0201**Augusta** | SCLA0202**Lansing** | SCLA0203**Lincoln** | SCLA0204**Harrisburg** | SCLA0206**Richmond** | SCLA0207

SPECIFICATIONS

Construction	Waterproof Core Laminate
Dimensions	9.5" Wide x 60" Long
Overall Thickness	14 mm (includes 2.0 mm EVA pad)
Wear Surface	AC4
Texture	Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	23.29 sf/ctn, 44 ctn/plt, 1024.8 sf/plt
Installation	Angle/Angle
Warranty	Lifetime Residential, 15 Yr Light Commercial, 15 Yr Multi-Family

INSTALLATION FAST FACTS

- Radiant Heat: Approved (Hydro Systems ONLY)
- Acclimate product to normal room conditions
- Max room size up to 66' x 66' with 1/2" expansion space
- Transition molding required at rooms which join irregularly or are heated unevenly
- Subfloors dry and flat (3/16" in 10')
- Installation on or below grade concrete requires 6 mil moisture barrier

Read Complete Instructions Before Installing



tasflooring.com

SPEC SHEET
 WARRANTY
 INSTALLATION & MAINTENANCE
 TRIMS, TRANSITIONS & QNOSE

