

PVC-FREE GLUE DOWN | 2.5 MM

Construction	PVC-Free Resilient Planks & Tiles
Classification	ASTMF3404
Dimensions (nominal)	Wood: 7" Wide x 48" Long, 177.8 mm x 1219.2 mm Stone: 12" Wide x 24" Long, 308.8 mm x 609.6 mm
Overall Thickness	2.5 mm
Finish Coat	PVC-Free Polyurethane and Thermoplastic Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	Wood: 35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 60 ctn/plt, 2100 sf/plt Stone: 36 sf/ctn, 18 pcs/ctn, 31.3 lbs/ctn, 60 ctn/plt, 2160 sf/plt

Installation & Maintenance

Glue Down

Ambient & Surface Temperature at Installation: Acclimate product to environment.


Maintenance: Subfloors dry and flat (3/16" in 10'). Approved over in-floor Radiant Heat, all methods. Max temp. 85 degrees.

Recommended Adhesives: Taylor Adhesive Dynamic (preferred), Taylor Pinnacle, or TEC Flexera High Track Premium Universal Adhesive. Please see Installation Instructions for full application requirements.

Test Method & Requirements

Heterogeneous Polyurethane Flooring (PVC Free)	ASTM F3404	
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Static Load Recovery > 250 Lbs	ASTM F970	Pass
Resistance to Heat / Light	ASTM F1514-15	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Measuring of Resilient by Dial Gauge	ASTM F2421	Pass
Castor Chair Test	ISO 4918	Pass
Static COF Polished Surface	ASTM D2047	Exceeds Industry Standard
Flammability/Radiant Flux	ASTM E648	Class i
Smoke Density	ASTM E662	Pass

**The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.*

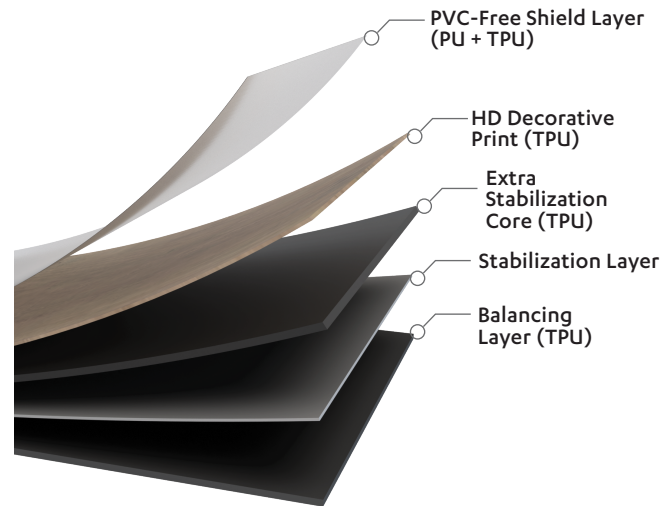


TPU = Thermoplastic Polyurethane

Warranty


10 Year Commercial, 10 Year Light Commercial, 25 Year Residential

Layout Options:


NOT TO SCALE




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER

Health & Environmental

FloorScore SCS Certified
Phthalate-Free
PVC-Free
100% Recyclable
100% Thermoplastic PU

