

## BRAVEWOOD

HARDWOOD | 7/16" THICK























### ADAMANTINE **PROTECTION**

With Adamantine Protection, the Bravewood Collection exceeds wear testing standards, providing unbeatable scratch defense. This ensures long-lasting durability and resilience, maintaining the quality of your floors for years to come.



### **REAL WOOD VENEER**

With a 6 mil Birch veneer and direct digital print, Bravewood offers the authentic look and feel of real wood.



### **TOPICALLY WATERPROOF**

Designed for multi-family and light commercial use, Bravewood's topically waterproof construction ensures long-lasting performance and protection against spills and moisture.



### **ANTI-FADE & DENT RESISTANT**

Bravewood is engineered to resist fading and dents, maintaining its beauty and integrity even in the most demanding environments.




### **ECO-FRIENDLY**

This collection is environmentally conscious, providing a sustainable flooring solution that meets the highest eco-friendly standards.



QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.



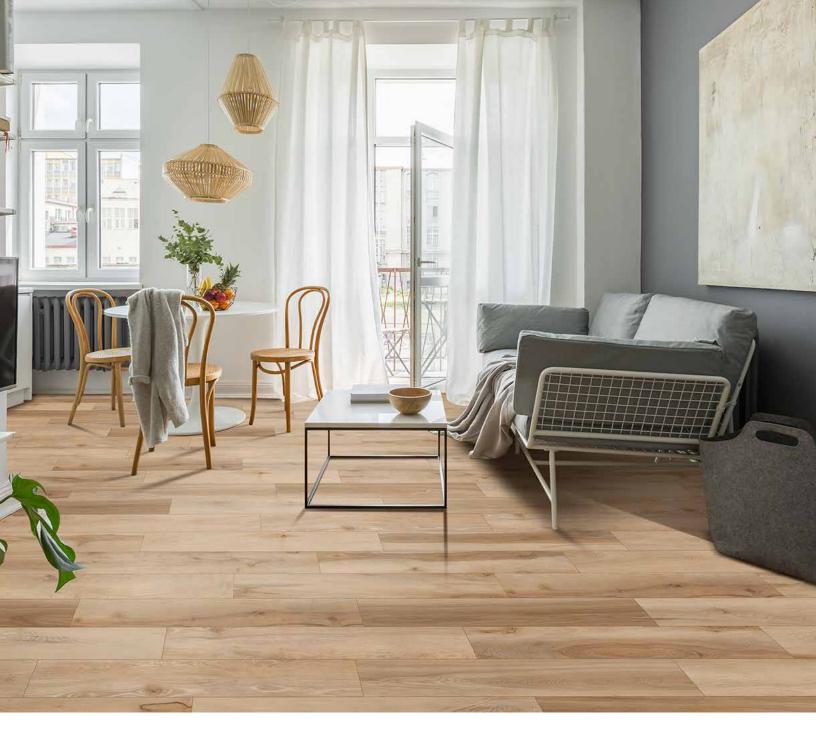



SUNSHINE HICKORY
WATERPROOF HYBRID

BW343 7/16" THICK





LIGHT CANOY
WATERPROOF HYBRID

BW422 7/16" THICK





CLEAN BRUSHED
WATERPROOF HYBRID

BW443 7/16" THICK





ANTIQUE OAK WATERPROOF HYBRID

BW763 7/16" THICK





NATURAL CLEAN WATERPROOF HYBRID

BW1592 7/16" THICK





PLAIN DRIFTWOOD WATERPROOF HYBRID

BW1624 7/16" THICK





NOON HICKORY WATERPROOF HYBRID


BW1625 7/16" THICK





PLAIN BROWN WATERPROOF HYBRID

BW1626 7/16" THICK

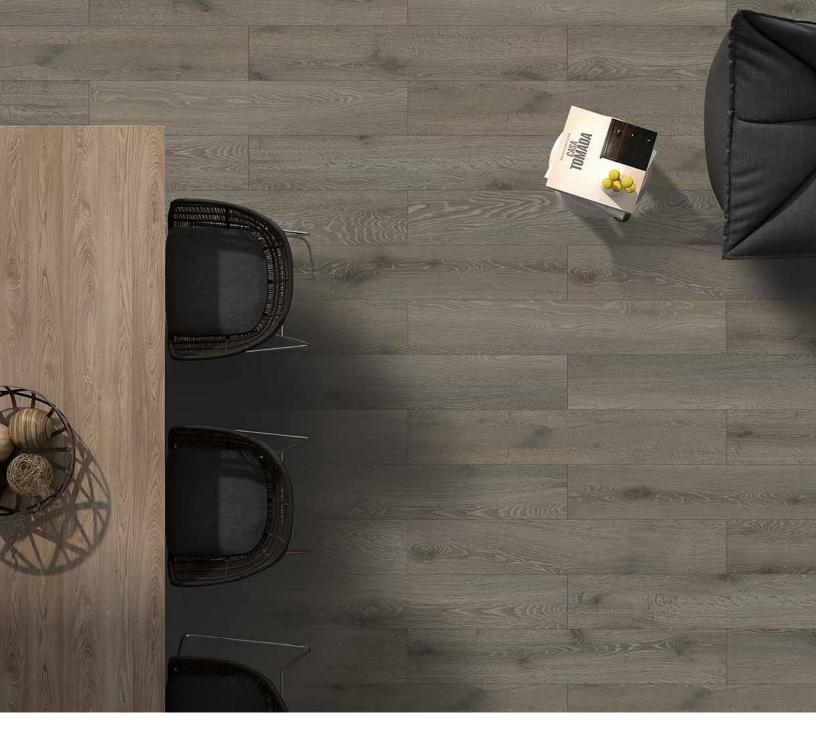



GRAY OAK WATERPROOF HYBRID

BW7557 7/16" THICK





RIFTWOOD KNOT WATERPROOF HYBRID

BW7559 7/16" THICK

# BRAVEWOOD



### HYBRID HARDWOOD | 7/16" THICK

Construction	Waterproof Hybrid Hardwood		
Species	Birch		
Dimensions	7.68" Wide x 48" Long, 195 mm x 1215 mm		
Overall Thickness	12 mm		
Attached Pad	1.5 mm IXPE Pad		
Veneer Thickness:	0.6 mm Wood Veneer		
Surface Finish	AC4 Rated Antimicrobial		
Design Feature	Embossed In Register		
Edge Profile	4-Sided Micro Bevel		
Packaging	20.56 sf/ctn, 8 pcs/ctn, 42.1 lbs/ctn		

### **Installation & Maintenance**

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner, such as T&A Supply Fresh Floors

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40

Test Method & Requirements			
Standard Laminate	EN 13329	Pass	
Thickness (with Pad)	ASTM F386/ (387)	Pass	
Wear Layer Thickness	ASTM F410	Pass	
Squareness of Element	ANNEX A	Pass	
Height Difference of Element	ANNEX B	Pass	
Opening Between Element	ANNEX B	Pass	
Tabor Abrasion	ANNEX E	Pass	
Large Ball	ANNEX F	Pass	
Small Ball	ANNEX F	Pass	
24 Hour Thickness Swelling	ANNEX G	Pass	
Resistance to Staining	EN 438	Pass	
HPLC Gradiant Chemical Analysis		Pass	
Pull Test		Pass	
Impact Insulation Class IIC	ASTM E492*		
Sound Transmission Class STC	ASTM E90*		
*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.			

### **Health & Environmental**


FloorScore SCS Certified Carb Phase II Compliant GreenGuard Gold











### Warranty

7 Year Light Commercial, Lifetime Residential

### Accessories

**QNose** Stair Noses

