



SIERRA TILE

SPC | 6.0 MM, 12 MIL

TAS
CONTRACT

TASCONTRACT.COM

SIERRA TILE

SPC | 6.0 MM, 12 MIL



DURABLE WATERPROOF CORE

Engineered with a stone polymer composite rigid core, Sierra Tile delivers reliable waterproof performance and structural stability for residential and light commercial environments.



MODERN TILE DIMENSIONS

The 12"x24" tile format features painted bevel edges which elevate the tile's dimensional character and provides a refined finish ideal for contemporary interiors.



PROTECTIVE SURFACE FINISH

A 12 mil polyurethane wear layer and embossed texture combine to provide visual depth and long-lasting resistance to everyday wear.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Quarter Round
- Star Noise
- QNose

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





COTTO BEIGE
LUXURY VINYL

DGRC1401
6.0 MM | 12 MIL



LIMESTONE WHITE
LUXURY VINYL

DGRC1402
6.0 MM | 12 MIL




HERMES GRAY
LUXURY VINYL

DGRC1403
6.0 MM | 12 MIL



PULPIS BROWN
LUXURY VINYL

DGRC1404
6.0 MM | 12 MIL

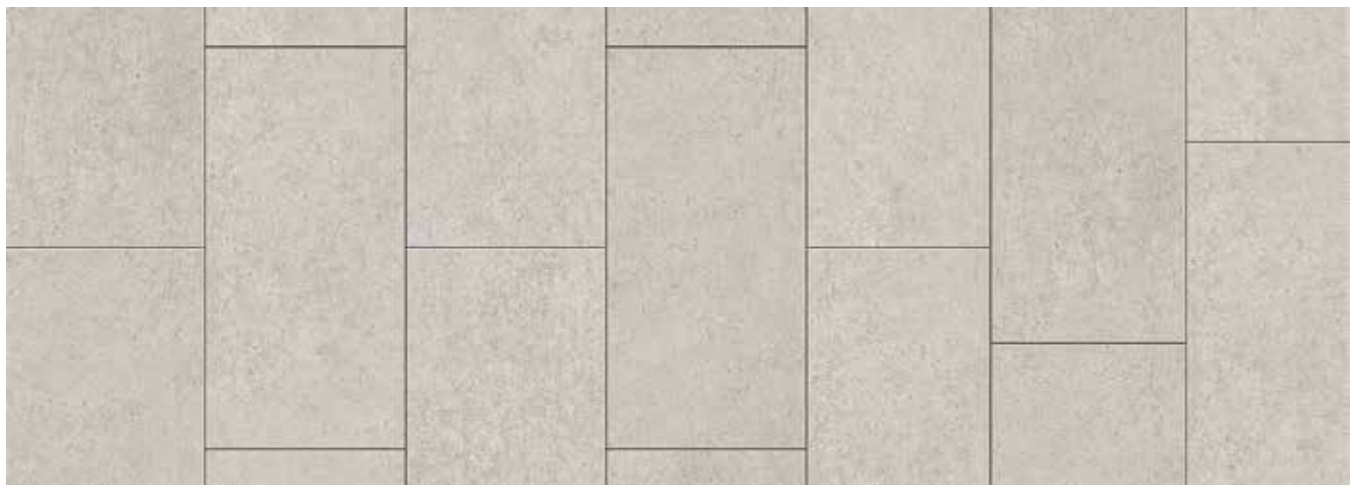

SAND WHITE
LUXURY VINYL

DGRC1405
6.0 MM | 12 MIL



ITALIAN GREY SAND
LUXURY VINYL

DGRC1406
6.0 MM | 12 MIL

SIERRA TILE



SPC | 6.0 MM, 12 MIL

Construction	SPC Rigid Core, Stone Polymer Composite
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	12" Wide x 24" Long (300 mm x 600 mm)
Overall Thickness	6.0 mm (Includes 1.0 mm Pad)
Attached Pad	1.0 mm
Wear Layer	12 Mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Painted Bevel
Packaging	19.375 sf/ctn, 10 pcs/ctn, 41.3 lbs/ctn, 54 ctn/plt, 1046.25 sf/plt

Installation & Maintenance

Angle / Angle

Layout Room Size: Minimum expansion space to all vertical substrates 1/4".
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at installation: 60 - 85 degrees Fahrenheit

Maintenance: Neutral pH Cleaner, such as Fresh Floors by TAS Flooring.

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/387	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified

Phthalate Free

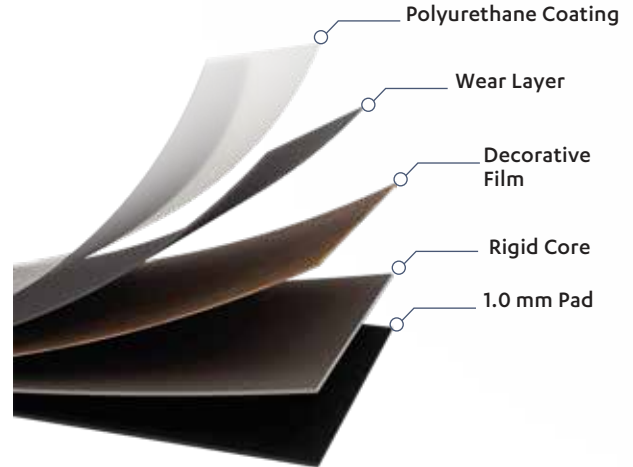

Warranty


5 year Light Commercial, 5 year Multifamily, 25 Year Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNoise](#) Stair Nosing

Layout Options

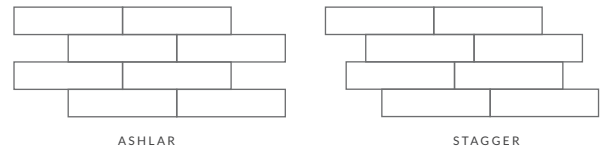

Additional specifications, full installation/maintenance and warranty information available online at TASCONTRACT.COM

A division of [TAS supply company, Inc.](#)



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.