



TENACITY

GLUE DOWN | 2.5 MM, 12 MIL


TAS

CONTRACT

TASCONTRACT.COM

TENACITY

GLUE DOWN | 2.5 MM, 12 MIL



UNMATCHED DIMENSIONAL STABILITY

The Tenacity Collection features increased fiberglass content and an advanced anti-curling stabilization layer, delivering superior dimensional stability.



VERSATILE DESIGN OPTIONS

With 7" wide by 48" long planks and a low-gloss, embossed texture, Tenacity offers a natural wood-like aesthetic that seamlessly fits into multi-family and light commercial spaces.



SECURE & SEAMLESS INSTALLATION

The glue-down construction provides a stable, long-lasting fit, while the square edge profile ensures a clean and polished look throughout your project.



PROVEN PERFORMANCE

ASTM F1700 certified, the Tenacity Collection combines the best colors from TAS Flooring's top selling lines with upgraded construction, offering durability, resilience, and a stylish finish.

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





COMPASS
LUXURY VINYL

NOLV0601
2.5 MM | 12 MIL



GARDENIA
LUXURY VINYL

NOLV0606
2.5 MM | 12 MIL



GIBRALTAR
LUXURY VINYL

NOLV0604
2.5 MM | 12 MIL



MONITOR
LUXURY VINYL

NOLV0607
2.5 MM | 12 MIL



MIMOSA
LUXURY VINYL

NOLV0602
2.5 MM | 12 MIL



PRIMROSE
LUXURY VINYL

NOLV0603
2.5 MM | 12 MIL



SLOOP
LUXURY VINYL

NOLV0605
2.5 MM | 12 MIL

GLUE DOWN | 2.5 MM, 12 MIL

Construction	Luxury Vinyl Tile
Classification	ASTM F1700, Class III, Type B
Dimensions	7" Wide x 48" Long, 177.8 mm x 1219.2 mm
Overall Thickness	2.5 mm
Wear Layer	12 mil
Finish Coat	Polyurethane
Texture	Embossed
Edge Profile	Square Edge
Packaging	35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 2100 sf/ctn, 60 ctn/plt

Installation & Maintenance

Glue Down

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	PASS >250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental


FloorScore Certified

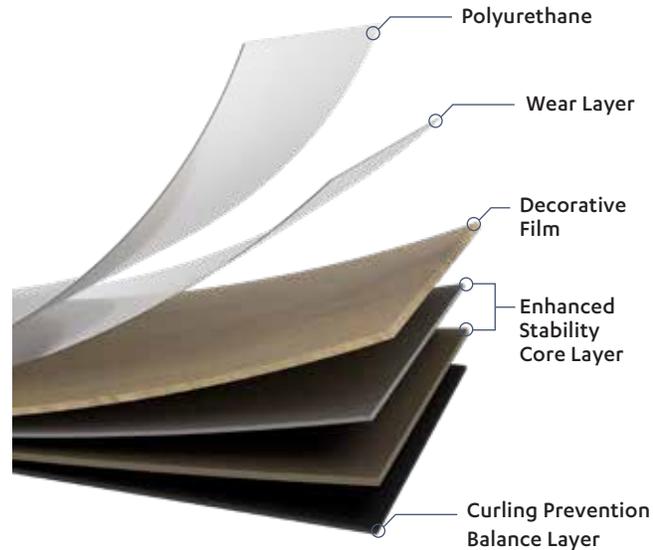


Warranty & Maintenance

5 Year Light Commercial/Multifamily Common Areas, 25 Year Residential/Multifamily Residence


Layout Options:




HERRINGBONE




TRIPLE HERRINGBONE



FIVE PLANK PARQUET



ASHLAR



STAGGER



T A S

CONTRACT

TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.