

# PROVINCIAL ESTATE



SPC 6.0 MM, 20 MIL



**Biltmore** | DGRC0801



**Fairlawn** | DGRC0808



**Florham** | DGRC0806




**Idle Hour** | DGRC0802



**Lynnewood** | DGRC0804



**Meadow Brook** | DGRC0805

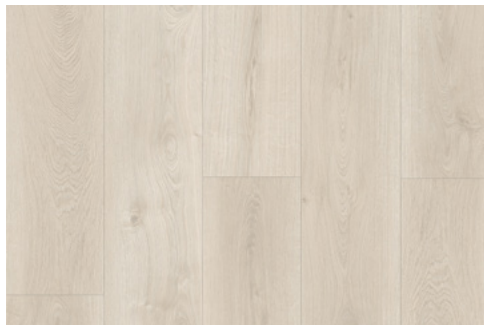

**Oheka** | DGRC0807



**Winterthur** | DGRC0803

## SPECIFICATIONS

Construction	SPC Rigid Core, Stone Polymer Composite.
Classification	ASTM F3261, Class 1, Type B, Grade 1, Class B
Dimensions	7" Wide x 60" Long
Overall Thickness	6.0 mm (Includes 1 mm IXPE pad)
Wear Layer	20 mil
Finish Coat	High-Definition, Low Gloss Matte
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	50.5 lbs; 8 pc/ctn, 23.62 sf/ctn, 45 ctn/plt, 1062.9 sf/plt
Installation	Angle/Angle, Float
Warranty	10 Yr Light Commercial, 10 Yr Multi-Family, 30 Yr Residential

## INSTALLATION FAST FACTS

- Transitions required for rooms larger than 50' W x 50' L
- Acclimate to Normal Room Conditions (NRC) 60°F - 85°F
- Hydro Radiant Heat approved (≤ 85°F)
- Expansion Space: 1/4" gap
- Ambient RH Between 35% to 55%
- Floor Flatness to 3/16" in 10'
- Floating floors must be allowed to expand and contract with no restrictions

Read Complete Instructions Before Installing



tascontract.com

**SPEC SHEET  
WARRANTY  
INSTALLATION & MAINTENANCE  
TRIMS, TRANSITIONS & QNOSE**



Additional specifications, full installation instructions & warranty information available online at [tascontract.com](https://tascontract.com)

**TAS** supply company, Inc.