

HYBRID HARDWOOD | 1/2" THICK

Construction	Topical Waterproof Hybrid Hardwood
Species	Birch
Dimensions	7.68" Wide x 48" Long, 195 mm x 1215 mm
Overall Thickness	12 mm (Includes 1.5 mm Pad)
Attached Pad	1.5 mm IXPE Pad
Veneer Thickness	0.6 mm Wood Veneer
Surface Finish	AC4 Rated Antimicrobial
Design Feature	Embossed In Register
Edge Profile	4-Sided Micro Bevel
Packaging	20.56 sf/ctn, 8 pcs/ctn, 42.1 lbs/ctn

Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner.

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant
GreenGuard Gold

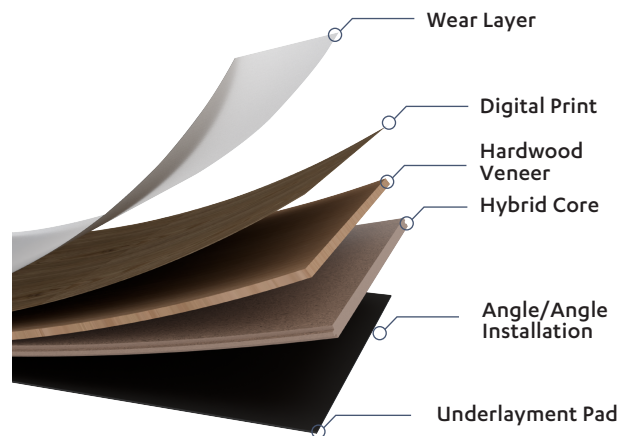

Warranty


7 Year Light Commercial, Lifetime Residential

Accessories


End Cap, Flush Round Stairnose, Flush Square Stairnose, Overlap Stairnose, Quarter Round, Reducer, T-Mold

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER