

# BRAVEWOOD



## HYBRID HARDWOOD | 7/16" THICK

Construction	Waterproof Hybrid Hardwood
Species	Birch
Dimensions	7.68" Wide x 48" Long, 195 mm x 1215 mm
Overall Thickness	12 mm
Attached Pad	1.5 mm IXPE Pad
Veneer Thickness:	0.6 mm Wood Veneer
Surface Finish	AC4 Rated Antimicrobial
Design Feature	Embossed In Register
Edge Profile	4-Sided Micro Bevel
Packaging	20.56 sf/ctn, 8 pcs/ctn, 42.1 lbs/ctn

### Installation & Maintenance

Angle/Angle

Ambient & Surface Temperature at Installation: Acclimate product to environment

Maintenance: No Wax, Neutral PH cleaner, such as T&A Supply Fresh Floors

Expansion & Transition: 3/8" expansion; max room size w/o transition 40x40

### Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	


\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

### Health & Environmental

FloorScore SCS Certified

Carb Phase II Compliant

GreenGuard Gold

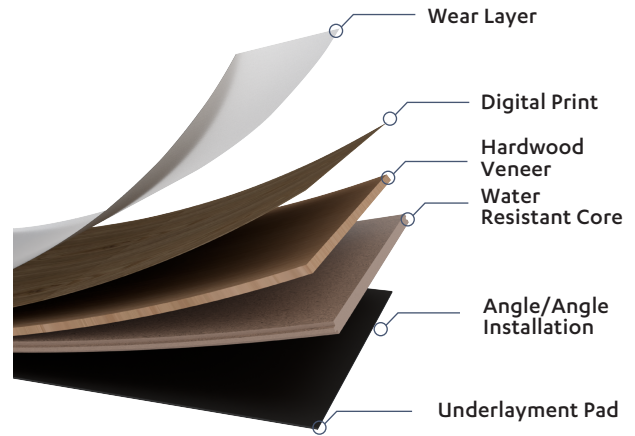

### Warranty


7 Yr Light Commercial, Lifetime Residential

### Accessories


[QNose](#) Stair Noses

### Layout Options:

NOT TO SCALE



ASHLAR



STAGGER

