

EQUINOX MULTI



LAMINATE 12 MM + 1.5 MM ATTACHED PAD

Construction	Water Resistant Core Laminate
Classification	EN 13329
Dimensions	3.5", 5.5", 7.5" Wide x 48" Long
Overall Thickness	13.5 mm (includes 1.5 mm pad)
Attached Pad	1.5 mm EVA Sound Abatement Pad
Wear Surface	AC4
Texture	EIR or Embossed
Edge Profile	4-Sided Painted Bevel
Packaging	22.54 sf/carton - 33 cartons/pallet - 743.81 sf/pallet

Installation & Maintenance

Angle / Drop & Tap

Transition: Transition required for rooms larger than 66' W x 66' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

GreenGuard Certified

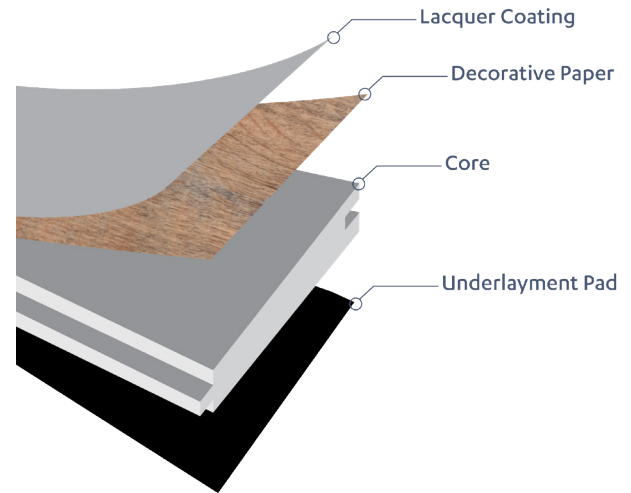

Warranty

15 Yr Light Commercial, 15 Yr Multi-Family, Lifetime Residential

Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round

[QNose](#) Stair Nosing

Layout Options:

