



# COMPLIMENT

SPC | 5 MM, 12 MIL

**TAS**

CONTRACT

[TASCONTRACT.COM](http://TASCONTRACT.COM)

# COMPLIMENT

SPC | 5.0 MM, 12 MIL



## PEACE OF MIND **WATERPROOF**

Waterproof core technology protects against spills so this can be installed in most rooms of the home or business.



## **INDENTATION** RESISTANT

Rigid Core products feature a dense, solid core that provides resistance to indentation. Rigid Core flooring solutions address a variety of needs in light commercial and residential spaces.



## **SOUND** ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.

## TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





**NORWOOD**  
SPC RIGID CORE

WIRC0701  
5 MM | 12 MIL



**CORTEZ**  
SPC RIGID CORE

WIRC0702  
5 MM | 12 MIL



**SPICE ROAD**  
SPC RIGID CORE

WIRC0703  
5 MM | 12 MIL



**SALATHE**  
SPC RIGID CORE

WIRC0704  
5 MM | 12 MIL



**HALF DOME**  
SPC RIGID CORE

WIRC0705  
5 MM | 12 MIL



**STONEBROOK**  
SPC RIGID CORE

WIRC0706  
5 MM | 12 MIL



**FJORD**  
SPC RIGID CORE

WIRC0708  
5 MM | 12 MIL

# COMPLIMENT

SPC | 5.0 MM, 12 MIL

|                   |                                                                    |
|-------------------|--------------------------------------------------------------------|
| Construction      | Rigid Core, Stone Polymer Composite                                |
| Classification    | ASTM F3261, Class 1, Type B, Grade 1, Class B                      |
| Dimensions        | 7.25" Wide x 48" Long, 183 mm x 1220 mm                            |
| Overall Thickness | 5.0 mm (Includes 1.0 mm IXPE Pad)                                  |
| Attached Pad      | 1.0 mm IXPE Premium Pad                                            |
| Wear Layer        | 12 mil                                                             |
| Finish Coat       | Polyurethane                                                       |
| Texture           | Embossed                                                           |
| Edge Profile      | 4-Sided Micro Bevel                                                |
| Packaging         | 24.03 sf/ctn, 10 pcs/ctn, 41.6 lbs/ctn, 50 ctn/plt, 1201.55 sf/plt |

## Installation & Maintenance

Angle / Angle, Float

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.  
Transition required for rooms larger than 50' W x 50' L.

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Polish, such as TAS Flooring Fresh Floors


## Test Method & Requirements

|                                                 |                  |                  |
|-------------------------------------------------|------------------|------------------|
| Resilient Floor in Modular Format               | ASTM F3261       | Pass             |
| Thickness (with Pad)                            | ASTM F386/ (387) | Pass             |
| Wear Layer Thickness                            | ASTM F410        | Pass             |
| Stain/Chemical Resistance                       | ASTM F925        | Pass             |
| Resistance to Heat Color Change                 | ASTM F1514       | Pass             |
| Resistance to Light Color Change                | ASTM F1515       | Pass             |
| Residual Indentation                            | ASTM F1914       | Pass             |
| Size & Squareness                               | ASTM F2055       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ASTM F2199       | Pass             |
| Dimensional Stability w/Exposure to Heat        | ISO 23999        | Pass             |
| Determination of Geometrical Characteristics    | ISO 24337        | Pass             |
| Static Coefficient of Friction Polished Surface | ASTM D2047       | Exceeds Standard |
| Static Load Limit                               | ASTM F970        | PASS >250 LBS    |
| Flammability/Radiant Flux                       | ASTM E648        | Class I          |
| Smoke Density                                   | ASTM E662        | Pass             |
| Impact Insulation Class IIC                     | ASTM E492*       |                  |
| Sound Transmission Class STC                    | ASTM E90*        |                  |

\*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

## Health & Environmental

FloorScore Certified

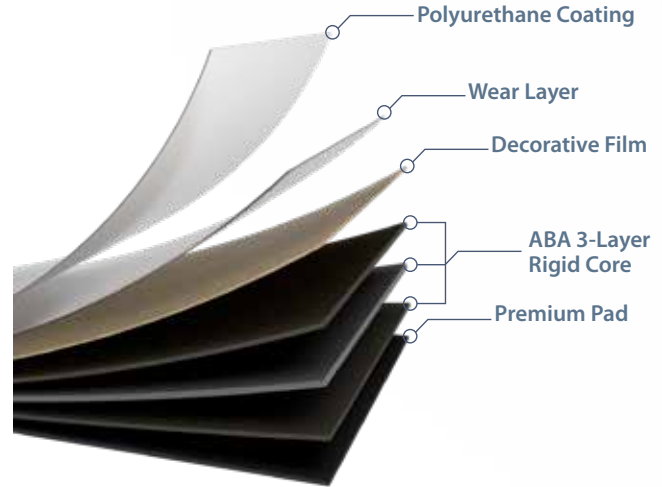


## Warranty & Maintenance

5 Year Light Commercial, 5 Year Multifamily, 25 Year Residential


## Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round  
[QNose](#) Stair Nosing

## Layout Options:



ASHLAR



STAGGER

TAS  
CONTRACT  
TASCONTRACT.COM

PLATFORMS  
LUXURY VINYL



Scan the QR Code to view Platforms, our  
TAS Contract custom flooring program.