



CARRINGTON

AC4 | 8 MM + 2.0 MM

TAS

CONTRACT

[TASCONTRACT.COM](https://tascontract.com)

CARRINGTON

AC4 | 8 MM + 2.0 MM




LAMINATE CONSTRUCTION

Carrington's HDF cores are sustainably sourced in Canada. It's FloorScore and Carb Phase 2 Complaint certified, and provides an 80-hour water-resistant core.



INDENTATION RESISTANT

With an AC4 wear rating, Carrington delivers a durable, scratch and indention-resistant floor.



LOCKING SYSTEM

This Angle-Tap locking system is glueless watertight and has hydrophobic coated edges.



SOUND ABATEMENT PAD

The attached Premium Acoustical Pad provides sound-dampening properties in addition to the floor/ceiling assembly.

TRIMS & TRANSITIONS

- T-Mold
- Reducer
- Endcap
- Stair Nose
- Quarter Round

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.





SKIPPING STONE
WATERPROOF LAMINATE

NE308010
8 MM + 2.0 MM



SEA SALT OAK
WATERPROOF LAMINATE

NE308011
8 MM + 2.0 MM



SUNSET OAK
WATERPROOF LAMINATE

NE308015
8 MM + 2.0 MM



PINE CONE
WATERPROOF LAMINATE

NE308018
8 MM + 2.0 MM



COFFEE BEAN
WATERPROOF LAMINATE

NE308020
8 MM + 2.0 MM

CARRINGTON



WATERPROOF LAMINATE | 8 MM + 2.0 MM PAD

Construction	Waterproof Laminate
Classification	EN 13329
Dimensions	7.75" Wide x 48" Long, (195 mm x 1215 mm)
Overall Thickness	10 mm (Includes 2.0 mm Pad)
Attached Pad	2.0 mm IXPE
Wear Layer	AC4 Rated
Texture	Embossed-In-Register
Edge Profile	4-Sided Painted Bevel
Packaging	20.4 sf/ctn, 8 pcs/ctn, 30 lbs/ctn, 60 ctn/plt, 1224 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: Transition Required for rooms Larger than: (50) L x (50) W
Minimum expansion space to all vertical substrates 1/4"

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: Neutral pH Cleaner


Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environment

FloorScore SCS Certified

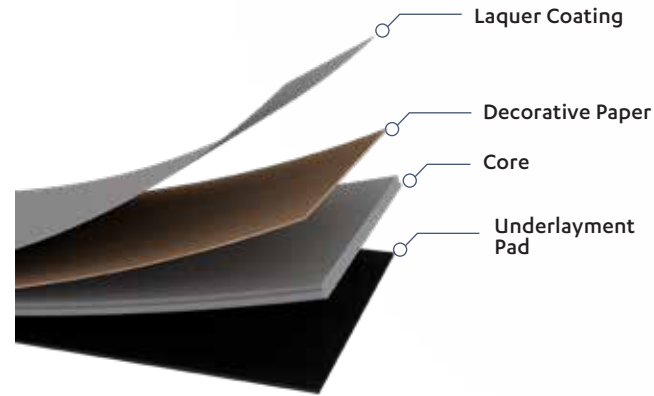


Warranty

Waterproof, 10 Year Limited Commercial, 10 Year Multifamily, Lifetime Residential

Accessories

End Cap, Quarter Round, Stair Nose, Reducer, T-mold, Q Nose

Layout Options:

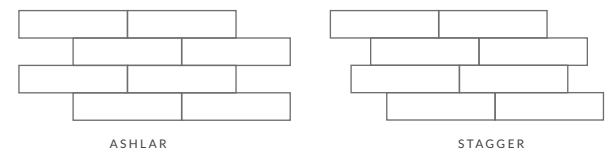

TAS
CONTRACT

TASCONTRACT.COM

PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.