

GLUE DOWN | 2.5 MM, 12 MIL

| | |
|-------------------|--|
| Construction | Luxury Vinyl Tile |
| Classification | ASTM F1700, Class III, Type B |
| Dimensions | 7" Wide x 48" Long, 177.8 mm x 1219.2 mm |
| Overall Thickness | 2.5 mm |
| Wear Layer | 12 mil |
| Finish Coat | Polyurethane |
| Texture | Embossed |
| Edge Profile | Square Edge |
| Packaging | 35 sf/ctn, 15 pcs/ctn, 30.5 lbs/ctn, 2100 sf/ctn, 60 ctn/plt |

Installation & Maintenance

Glue Down

Expansion & Transition: Temperature range of 60°F - 85°F

Maintenance: No Polish, Fresh Floors by TAS Flooring.


Test Method & Requirements

| | | |
|---|------------|------------------|
| Solid Vinyl Floor Tile | ASTM F1700 | Pass |
| Flexibility | ASTM F137 | Pass |
| Thickness | ASTM F386 | Pass |
| Wear Layer Thickness | ASTM F410 | Pass |
| Stain/Chemical Resistance | ASTM F925 | Pass |
| Resistance to Heat Color Change | ASTM F1514 | Pass |
| Resistance to Light Color Change | ASTM F1515 | Pass |
| Residual Indentation | ASTM F1914 | Pass |
| Size & Squareness | ASTM F2055 | Pass |
| Dimensional Stability w/Exposure to Heat | ASTM F2199 | Pass |
| Static Coefficient of Friction Polished Surface | ASTM D2047 | Exceeds Standard |
| Static Load Limit | ASTM F970 | PASS >250 LBS |
| Flammability/Radiant Flux | ASTM E648 | Class I |
| Smoke Density | ASTM E662 | Pass |
| Impact Insulation Class IIC | ASTM E492* | |
| Sound Transmission Class STC | ASTM E90* | |

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore Certified

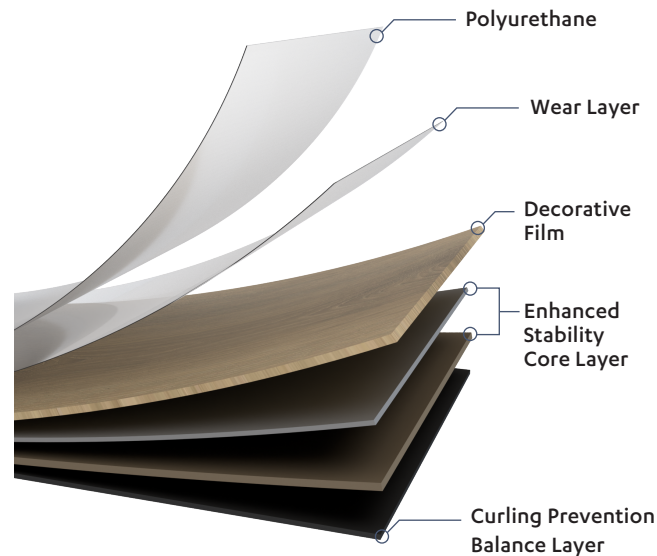

Warranty & Maintenance

5 Yr Light Commercial/Multifamily Common Areas, 25 Yr Residential/Multifamily Residence

Layout Options:

