

LAGUNA PLANK



HARDWOOD | 7/16" THICK

SPECIFICATIONS

Construction	Engineered Multi-ply Core
Species	Engineered European White Oak
Dimensions	6.5" wide, Multi-lengths up to 67"
Overall Thickness	7/16"
Attached Pad	N/A
Veneer Thickness:	1.5 mm
Surface Finish	Gloss, UV Cured Urethane Coating
Design Feature	Thermal Enhanced, Brushed
Edge Profile	4-Sided Micro Bevel
Packaging	43 lbs/ctn; 33.6 sf/ctn; 54 ctn/plt; 1814.4 sf/plt

Installation & Maintenance

Glue/Float/Staple (Glue Assist)

Ambient & Surface Temperature at Installation: 60 - 85 Degrees Fahrenheit

Maintenance: No Wax, Neutral PH cleaner, such as Fresh Floors by TAS Flooring.


Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Solid Vinyl Floor Tile	ASTM F1700	Pass
Flexibility	ASTM F137	Pass
Thickness	ASTM F386	Pass
Wear Layer Thickness	ASTM F410	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2199	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass

Health & Environmental

FloorScore SCS Certified
Carb Phase II Compliant

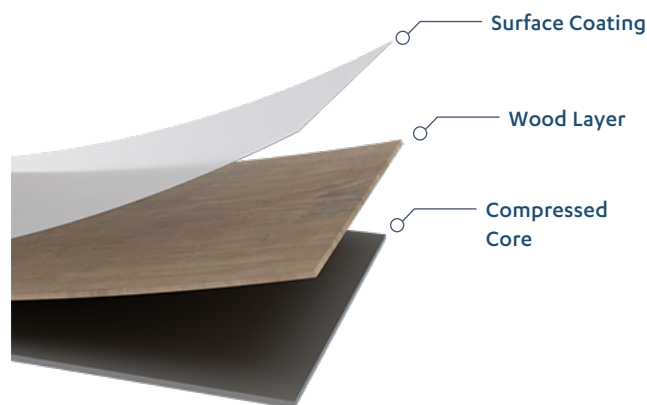

Warranty


5 Yr Light Commercial, 30 Yr Residential, Limited Lifetime Structural

Accessories


[QNose](#) Stair Nosing

Layout Options:

NOT TO SCALE



ASHLAR



STAGGER



Additional specifications, full installation instructions & warranty information available online at TASCONTRACT.COM

A division of [TAS supply company, Inc.](#)