

TITAN WOOD



HYBRID HARDWOOD | 7.2 MM, 1.2 MM

Construction	Waterproof Hybrid Hardwood
Species	American Hickory, European White Oak
Dimensions	7.5" Wide x 75" Long, 190 mm x 1900 mm
Overall Thickness	7.2 mm (includes pad)
Attached Pad	1.0 mm Premium IXPE Pad
Veneer Thickness:	1.2 mm Sliced
Surface Finish	Titan Tough wear layer with aluminum oxide
Design Feature	Brushed
Edge Profile	4-Sided Micro Bevel
Packaging	15.54 sf/ctn, 4 pcs/ctn, 40.8 lbs/ctn, 60 ctn/plt, 932.4 sf/plt

Installation & Maintenance

Float or Glue, Angle/Angle, Horizontal Tap

Ambient & Surface Temperature at Installation: Acclimate product to environment.

Work out of multiple boxes. Subfloors dry and flat (3/16" in 10').

Installation on or below grade concrete requires 6 mil moisture barrier.


Maintenance: No Wax, Neutral PH cleaner, such as TAS Flooring Fresh Floors

Recommended Adhesive: -Dynamic, Transitional Pressure Sensitive, firm set
-Pinnacle, Premium Transitional Pressure Sensitive, hard set

Test Method & Requirements

Standard Laminate	EN 13329	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Squareness of Element	ANNEX A	Pass
Height Difference of Element	ANNEX B	Pass
Opening Between Element	ANNEX B	Pass
Tabor Abrasion	ANNEX E	Pass
Large Ball	ANNEX F	Pass
Small Ball	ANNEX F	Pass
24 Hour Thickness Swelling	ANNEX G	Pass
Resistance to Staining	EN 438	Pass
HPLC Gradient Chemical Analysis		Pass
Pull Test		Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

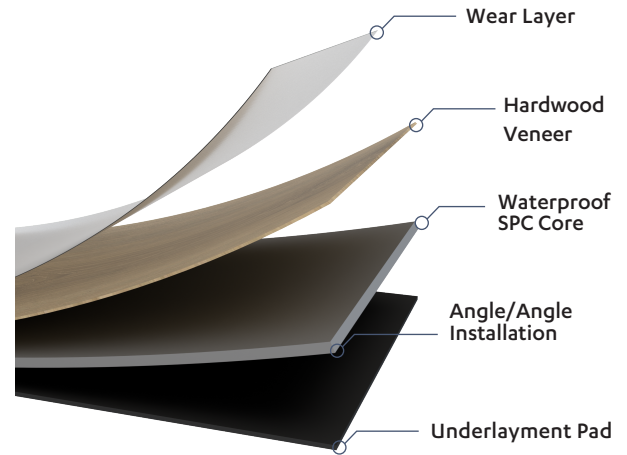

Warranty

10 Year Light Commercial, 50 Year Residential

Accessories

Trims: End Cap, Quarter Round, Reducer, and T-Mold

[QNose](#) Stair Nosing

Health & Environmental

FloorScore SCS Certified

Carb Phase II Compliant

