



TANDEM PREMIUM

WPC | 8.0 MM, 20 MIL

TAS
CONTRACT

TASCONTRACT.COM

TANDEM PREMIUM

WPC | 8.0 MM, 20 MIL



WPC CONSTRUCTION WITH BUILT-IN COMFORT

The Tandem Premium Collection features a durable 8.0 mm Engineered Vinyl WPC, providing enhanced underfoot comfort and sound absorption ideal for multifamily environments.



HIGH-PERFORMANCE SURFACE PROTECTION

A 20 mil wear layer and proprietary Adamantine Finish™ deliver exceptional scratch resistance, moisture protection, and long-term durability in high-traffic areas.



REFINED VISUALS WITH TRUE-TO-LIFE TEXTURE

Embossed-in-register surface detailing and pressed bevel edges enhance each 9" x 60" plank with authentic wood grain texture and definition.



MULTIFAMILY-READY EFFICIENCY

Tandem Premium ensures dimensional stability, ease of installation, and low-maintenance upkeep for large-scale projects.

TRIMS & TRANSITIONS

- T-Mold
- Stair Nose
- Reducer
- Quarter Round
- Endcap

QNose Stair Nosing is made from the same product as your flooring selection, ensuring it will match your installed floors.






BROOK HILL
LUXURY VINYL

VRWP0101
8.0 MM, 20 MIL



KENTON
LUXURY VINYL

VRWP0102
8.0 MM, 20 MIL

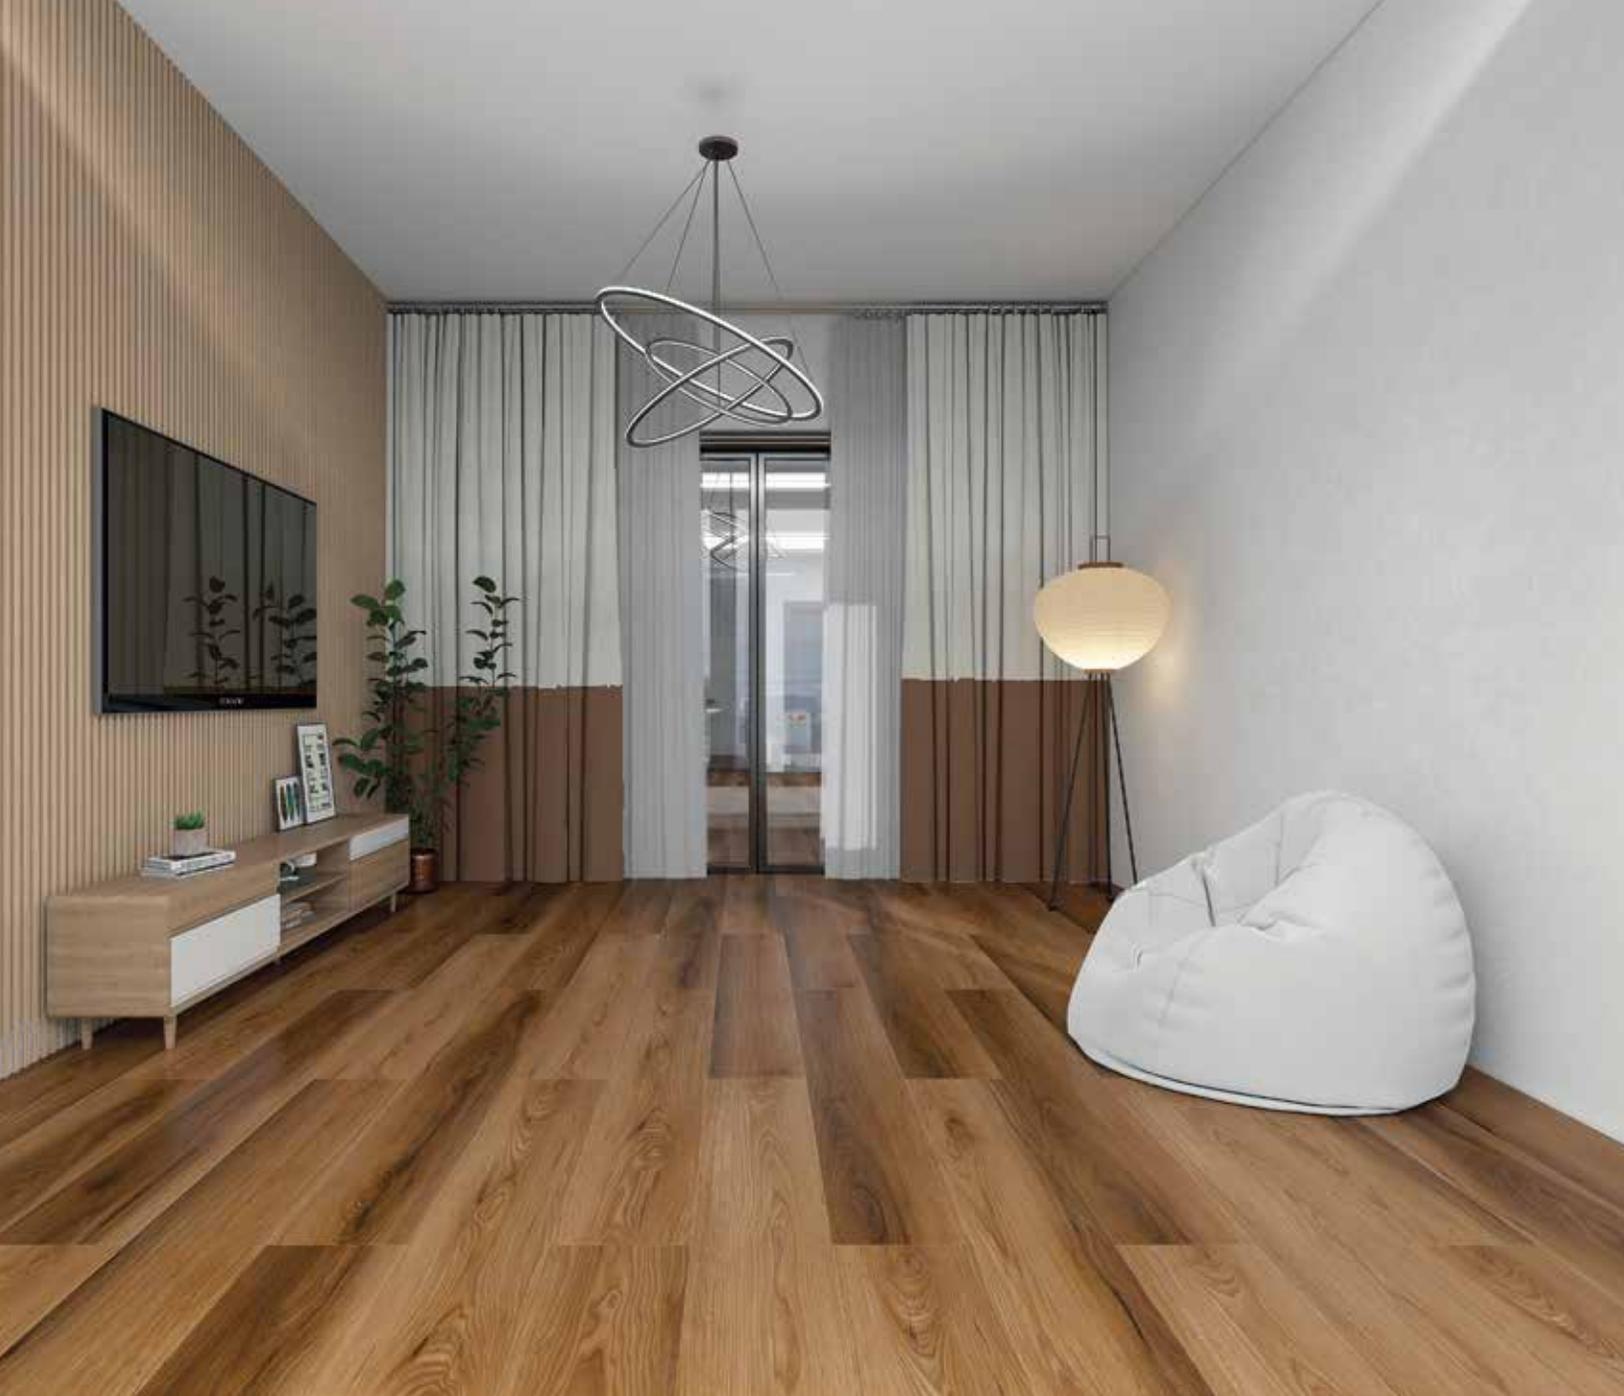

WOODFORD
LUXURY VINYL

VRWP0103
8.0 MM, 20 MIL



FEATHERSTONE
LUXURY VINYL

VRWP0104
8.0 MM, 20 MIL



HATFIELD
LUXURY VINYL

VRWP0105
8.0 MM, 20 MIL



DUNBAR
LUXURY VINYL

VRWP0106
8.0 MM, 20 MIL



HOLLOWAY
LUXURY VINYL

VRWP0107
8.0 MM, 20 MIL



SUNDERLAND
LUXURY VINYL

VRWP0108
8.0 MM, 20 MIL

TANDEM PREMIUM

WPC | 8.0 MM, 20 MIL

Construction	Engineered WPC Vinyl Click
Classification	ASTM F3261, Class I, Type B, Grade 1, Class B
Dimensions	9" Wide x 60" Long (224 mm x 1518 mm)
Overall Thickness	8.0 mm (Includes 1.5 mm Pad)
Attached Pad	1.5 mm Premium Pad
Wear Layer	20 mil
Finish Coat	Adamantine Finish™ Scratch, Stain, Wear Resist
Texture	Embossed-In-Register
Edge Profile	Pressed Bevel
Packaging	29.307 sf/ctn, 8 pcs/ctn, 50.7 lbs/ctn, 52 ctn/plt, 1524 sf/plt

Installation & Maintenance

Angle / Angle

Expansion & Transition: 1/4" Expansion required at perimeter and at all vertical surfaces.
Transition Required for rooms Larger than: (50) L x (50) W

Ambient & Surface: Acclimate product to environment.

Work out of multiple boxes. Subfloors dry and flat (3/16" in 10')
Hydroponic Radiant Heat Systems only

Maintenance: No Polish, Fresh Floors by TAS Flooring

Test Method & Requirements


Resilient Floor in Modular Format	ASTM F3261	Pass
Thickness (with Pad)	ASTM F386/ (387)	Pass
Wear Layer Thickness	ASTM F410	Pass
Stain/Chemical Resistance	ASTM F925	Pass
Resistance to Heat Color Change	ASTM F1514	Pass
Resistance to Light Color Change	ASTM F1515	Pass
Residual Indentation	ASTM F1914	Pass
Size & Squareness	ASTM F2055	Pass
Dimensional Stability w/Exposure to Heat	ASTM F2199	Pass
Dimensional Stability w/Exposure to Heat	ISO 23999	Pass
Determination of Geometrical Characteristics	ISO 24337	Pass
Static Coefficient of Friction Polished Surface	ASTM D2047	Exceeds Standard
Static Load Limit	ASTM F970	Pass > 250 LBS
Flammability/Radiant Flux	ASTM E648	Class I
Smoke Density	ASTM E662	Pass
Impact Insulation Class IIC	ASTM E492*	
Sound Transmission Class STC	ASTM E90*	

*The flooring assembly dictates IIC, STC, HIIC, and Low IIC results; contact your representative for specific testing.

Health & Environmental

FloorScore® program by SCS Global Services

Phthalate Free

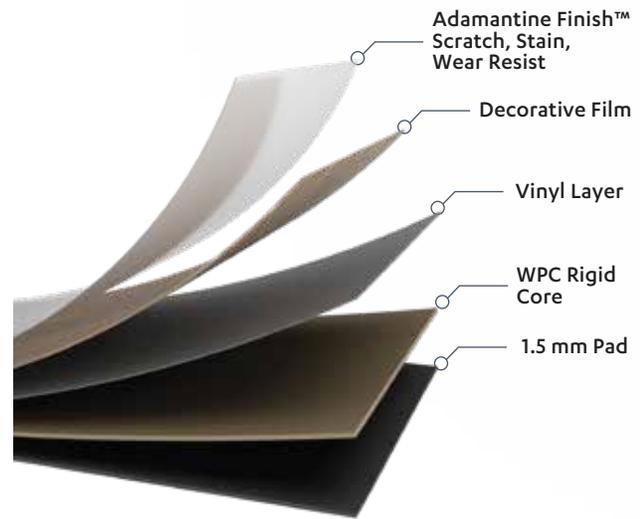

Warranty

10 Year Light Commercial, 30 Year Residential


Accessories

Trims: T Mold, Reducer, End Cap, Stair Nose, Quarter Round
[QNoise](#) Stair Nosing

Layout Options:



ASHLAR



STAGGER

TAS
CONTRACT
TASCONTRACT.COM



PLATFORMS
LUXURY VINYL



Scan the QR Code to view Platforms, our
TAS Contract custom flooring program.