


Polysafe Ultima combines the assurance of sustainable slip resistance with that of high durability for years of performance. Produced with enhanced slip resistance, the range features a concentrated level of safety aggregates in the vinyl to ensure underfoot safety. Polysafe Ultima provides low slip potential in busy commercial kitchens where oil and grease are regular contaminants, and can also be used in continually wet areas such as spa surrounds and walk-in showers.



Color Options

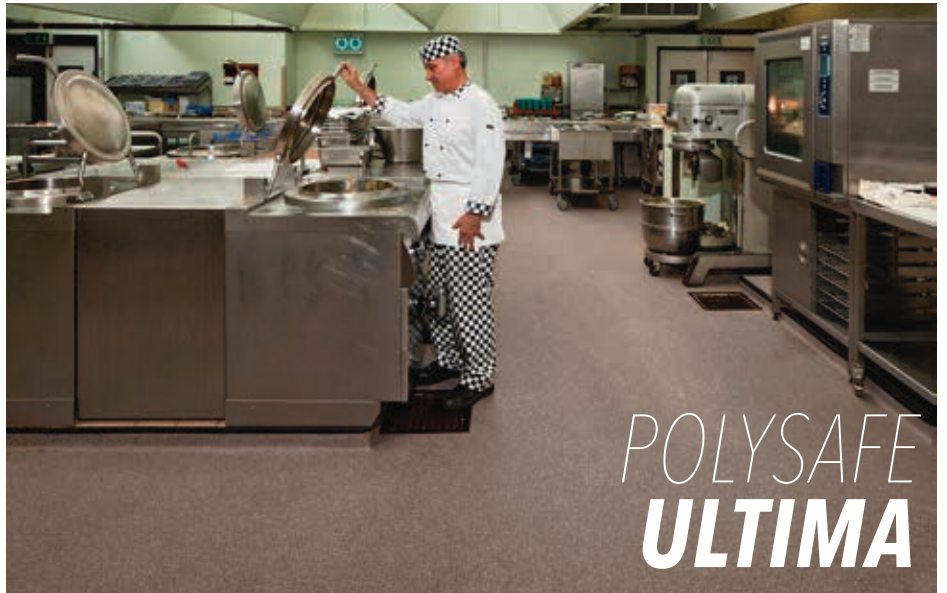

Iron Ore 4340




Mortar 4360




Bluestone 4390



Pearl Granite 4330

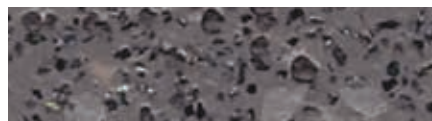

Aurora Grey 4290

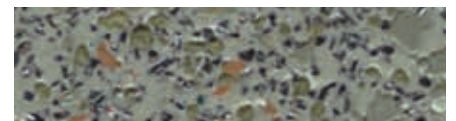

Baltic Green 4350



Technical Details

- ASTM 1303 Standard Specification for Sheet Vinyl Floor Covering with Backing
- ASTM F1514 Resistance to Heat - $\Delta E \leq 8$
- ASTM F1515 Resistance to Light - $\Delta E \leq 8$
- ASTM F970 Static Load Limit - 750 PSI
- ASTM D2047 Static Coefficient of Friction - >0.8
- ASTM F137 Flexibility - 1.5" Passes
- ASTM F925 Excellent - Chemical Resistance Chart available upon request
- ASTM E662 Smoke Density - <450
- ASTM E648 Flammability (Critical Radian Flux) NFPA Class 1 (>0.45 watts/cm²)
- Commercial Warranty - **12 Years**

Markets

Commercial & Institutional Kitchens

Applications


Walk in Freezers
Food Preparation
Cafeterias

Benefits

Can Withstand High Heat, Oil and Grease Spills
Enhanced Slip Resistance

Product Options

Rolls (47.84 SQ/YD, 430.56 SQ/FT - 6'-7" X 65.7" LF)
Full or Half



sales@PFAmerica.us
Call: 888-530-4925

© 2019 PF America, All Rights Reserved.
Lancaster, PA 17601