SALISH SERENITY

TAS FLOORING

RESIDENTIAL CARPET - 100% SOLUTION DYED POLYESTER


Construction	Broadloom
Face Weight	50
Total Weight	81.17
Average Roll Size	150'
Fiber	Polyester
Dye Method	100% Solution Dyed Polyester
Pile Height	0.468
Density	3846
Tufts Per Inch	9.3
Gauge	1/10



Evening Current | TASALEVE



Misted Shore | TASALMIS

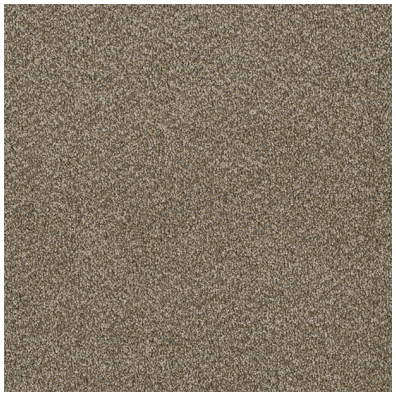

Sandstone Calm | TASALSAN



Weathered Driftwood | TASALWEA

Maintenance

Recommended Cleaner: FreshFloors by TAS Flooring

Test	
Flammability	Pass
Green Label Plus	Certification
CRI Certified	Verified

All Specifications are subject to normal manufacturing tolerances

Warranty	
Stain Resistance:	Lifetime
Fade Resistance:	Lifetime
Pet Stains:	Lifetime
Abrasive Wear:	25 Year
Manufacturing Defects:	25 Year
Soil Resistance:	25 Year
Texture Retention:	25 Year

INSTALLATION FAST FACTS

- Follow CRI Carpet Installation Standards Guidelines
- Inspect new flooring prior to installation
- Clean up spills immediately
- Vacuum regularly and use walk-off mats at entrances

Read Complete Instructions Before Installing

WARRANTY, INSTALLATION & MAINTENANCE

In Stock

SOLUTION DYED 100% POLYESTER

CRI GREEN LABEL +PLUS

TAS CONTRACT

Additional specifications, full installation instructions & warranty information available online at **TASCONTRACT.COM**

A division of T&A supply company, Inc.