

lil' 
CADDIE[®]
CHILD POSITIONER



INSTRUCTION MANUAL

Visit buyimmi.com for additional
products from **IMMI** 

lil' i
CADDIE[®]
CHILD POSITIONER



GENERAL INFORMATION 1

CHILD FIT REQUIREMENTS 1

WARNINGS 2

FEATURES 3

INSTALLATION 4

SECURING CHILD 5

CARE & MAINTENANCE 7

GENERAL INFORMATION

The IMMI team truly cares about child passenger safety and is committed to providing innovative products that offer the utmost in safety and ease of use. While injury cannot be prevented in every situation, proper installation and use can significantly reduce a child's risk of serious injury or death. It is critical to read and understand these instructions and the vehicle manufacturer's instruction BEFORE using this positioner. Failure to properly use this positioner may result in serious injury or death of the child. If you have any questions after reviewing the instructions, please contact us at:

Customer Service:

- **Online:** www.buyimmi.com/product-support
- **Call:** 1-877-447-2305

SCAN



For resources including: installation videos, warnings, and instructions.
www.buyimmi.com/product-support

CHILD FIT REQUIREMENTS

LIL' CADDIE POSITIONER IS FOR CHILDREN:

- 26.5 - 85 pounds (12 - 38.5 kg)
- 36 - 50.4 inches (91.4 - 128 cm)
- At least 2 years old

⚠️ WARNINGS

When not properly buckled, or when the device is not properly secured, children can escape and fall suddenly. To avoid serious injury or death from falls or other hazards:

- ALWAYS abide by applicable golf cart vehicle regulations.
- ALWAYS follow warnings/instructions in the vehicle's owner's manual.
- ALWAYS read and follow this device's instruction manual before use.*
- ALWAYS properly secure to the seat, and then properly secure the child before use.
- ALWAYS adjust straps snugly around child and confirm buckles are secure before use.
- USE ONLY on the seat of a golf cart.
- USE ONLY with adult supervision and in a seat next to an adult.
- NEVER leave child unattended in or around this device.
- NEVER use in or near water to avoid drowning.
- ALWAYS inspect for damage before and after use.

* If damaged, do not use.

*Read instruction manual for detailed information, instructions, and warnings.

This product is not a seatbelt. It is a positioner device.

Use only with children

- who weigh between 26.5 and 85 pounds (12 and 38.5 kg)
- whose height is between 36 and 50.4 inches (91.4 and 128 cm)
- who are at least 2 years old.

Use only with golf carts.

- DO NOT USE in vehicles that can reach or exceed 20mph (32 km).
- DO NOT USE in cars, trucks, aircraft, boats, or any vehicle other than a golf cart.




Strangulation hazard: Children can strangle in loose straps. NEVER leave child in this device when straps are loose or undone. NEVER allow a child to sleep in this device.

WARNING! DEATH or SERIOUS INJURY can occur:

Failure to follow all warnings and instructions can result in serious injury or death of your child.









FEATURES

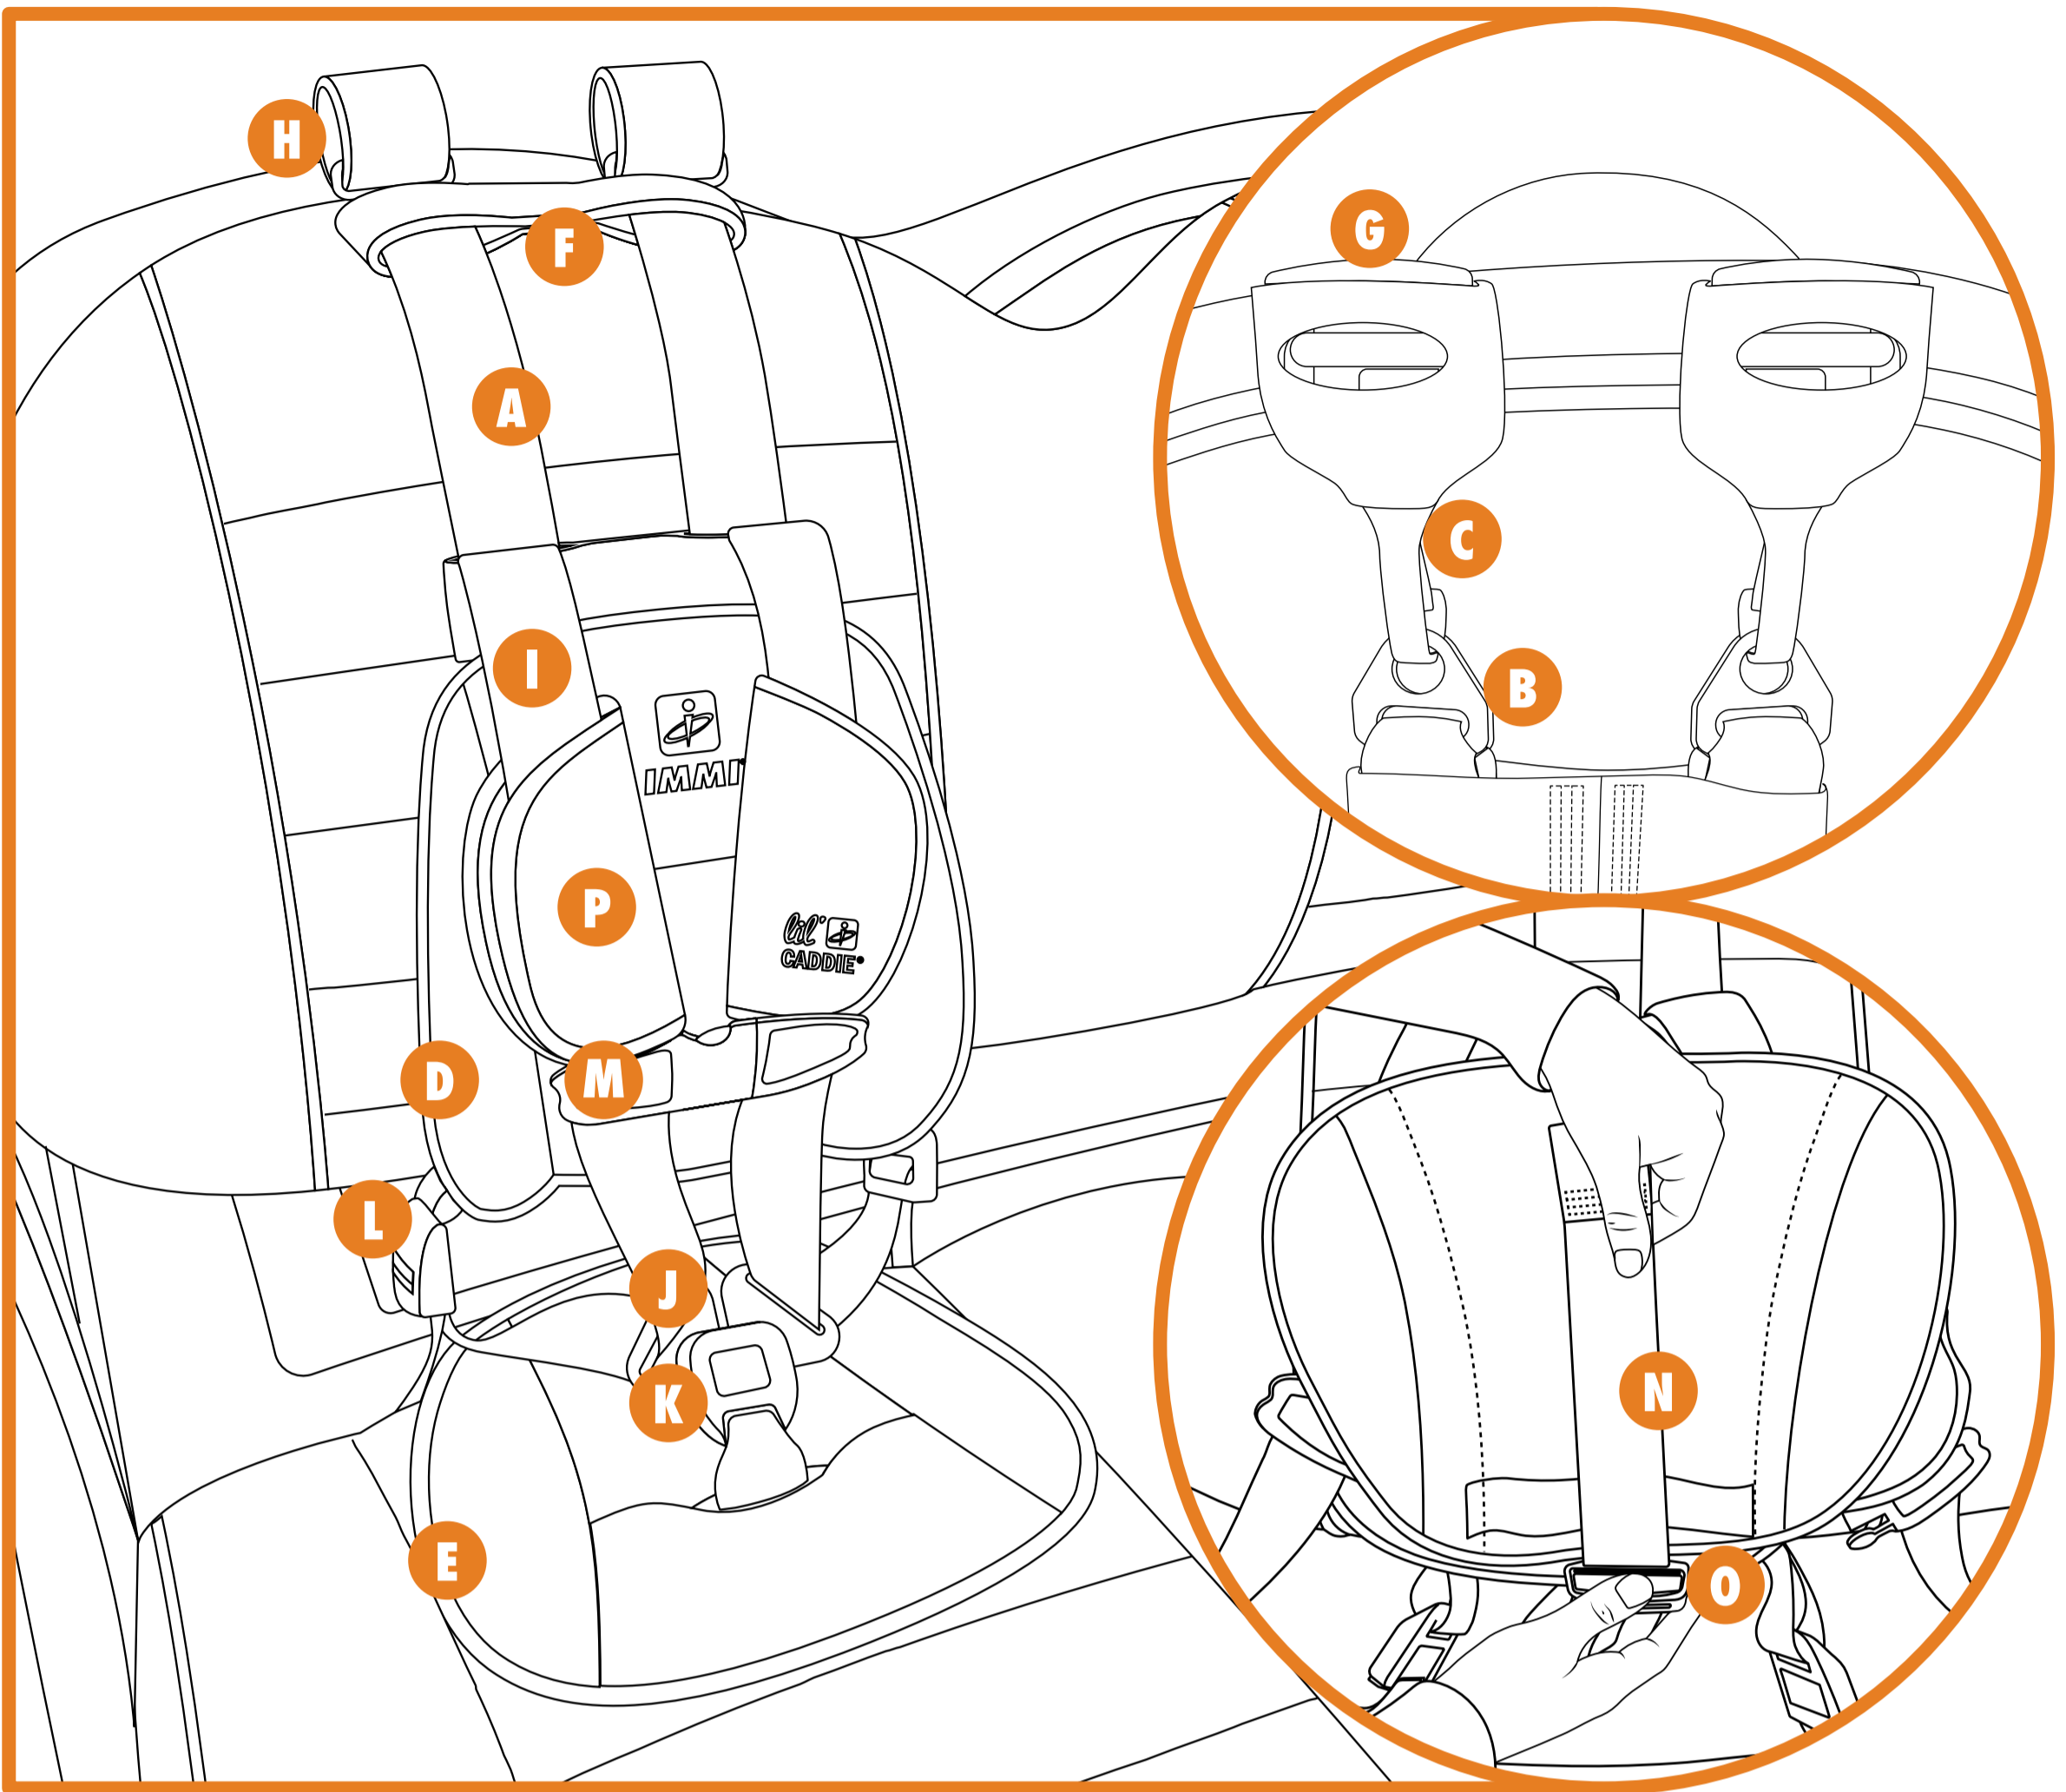

- A** Seat Wrap Straps (Grey)
- B** Seat Wrap Bracket
- C** Seat Wrap Snap Hook
- D** Back pad
- E** Base pad
- F** Seat Wrap Strap Width Guide
- G** Seat Wrap Strap Adjuster
- H** Hook and Loop Strap Keepers
- I** 5-Point Straps (Black)
- J** 5-Point Tongue
- K** 5-Point Buckle
- L** 5-Point Adjusters
- M** Chest Clip
- N** 5-Point Buckle Strap
- O** 5-Point Buckle Adjuster
- P** Shoulder Pads

INSTALLATION

- 1** Place the Lil' Caddie Positioner on the golf cart seat. Unhook **seat wrap straps** and insert the gray seat wrap strap (bracket end) through the opening at the rear of the seat cushion. Route the seat wrap straps around the back of the vehicle seat and place brackets on top of the vehicle seat back.
- 2** Connect the left **seat wrap strap bracket** to the left **seat wrap strap snap hook**. Connect the right seat wrap strap bracket to the right seat wrap strap snap hook. Place the snap hook/bracket assemblies on the back of the seat.
- 3** Ensure snap hook/bracket assemblies will not make contact with the child's head while child is in the seated position. The **seat wrap strap width guide** should be located at the top of the seat back. After ensuring there are no twists in the seat wrap straps, pull **seat wrap strap adjusters** to tighten both seat wrap straps.
- 4** Verify the security of the positioner by moving the seat wrap straps sideways. Positioner seat wrap straps should move less than one inch.
- 5** Once all seat wrap straps are tight and secure, use the **hook and loop strap keepers** on each strap to secure the free ends of the left and right seat wrap straps.
- 6** Straps must appear as shown in figure 6 after installation is complete.

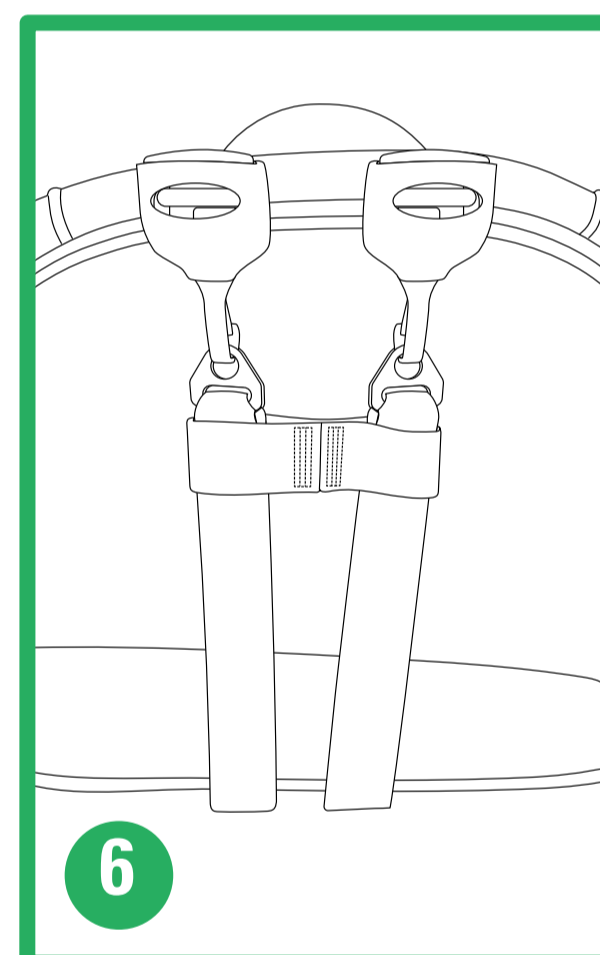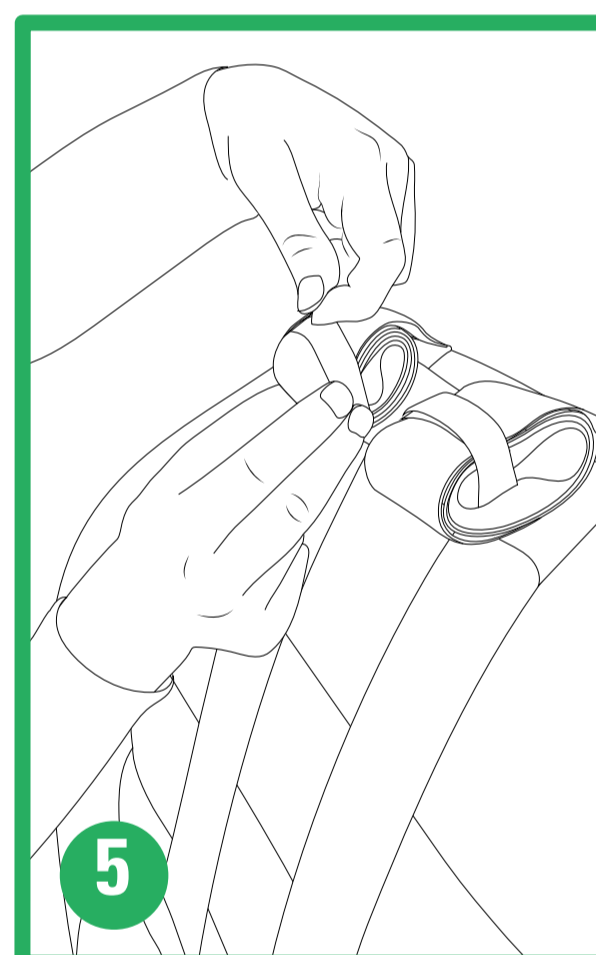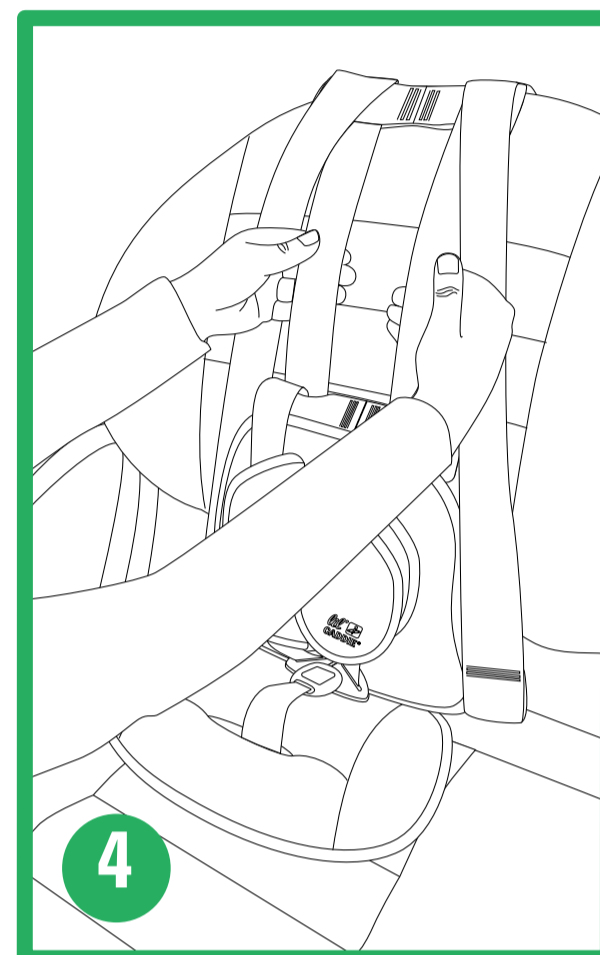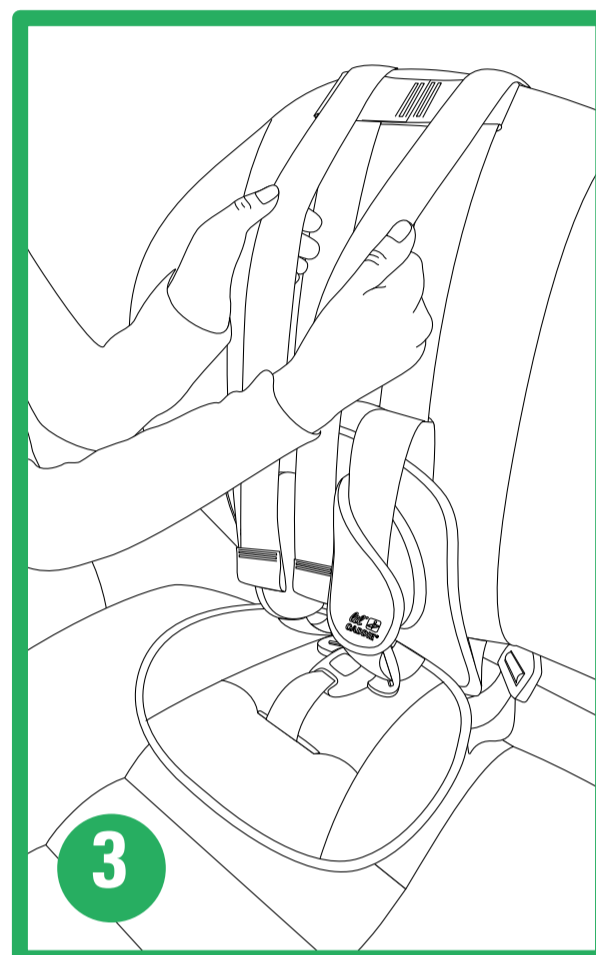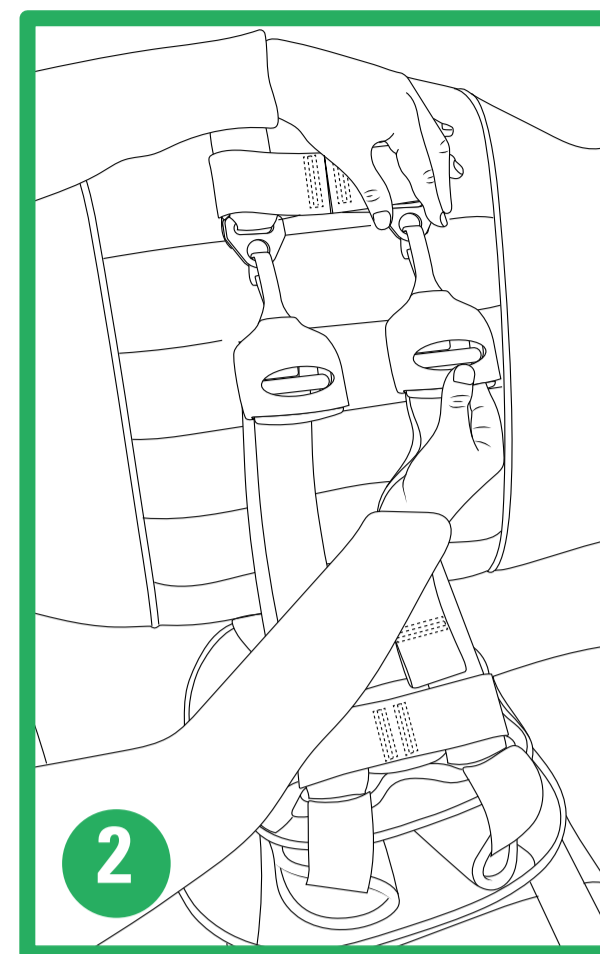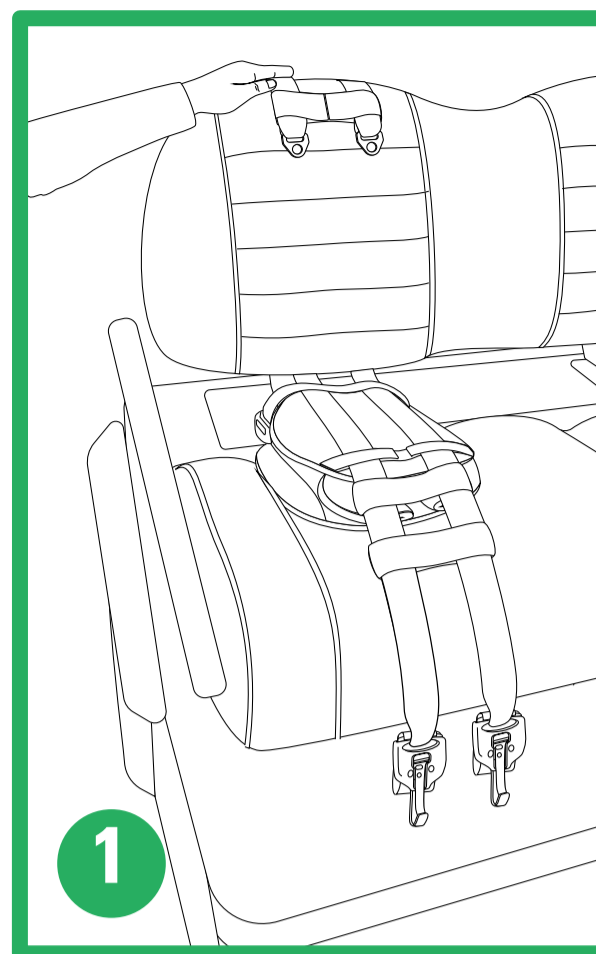

WARNING! DEATH or SERIOUS INJURY can occur:

Failure to follow all warnings and instructions can result in serious injury or death of your child.

SECURING THE CHILD

1 Prepare 5-point straps:

- Push left **5-point adjuster** button and pull up on left shoulder strap to loosen straps. Repeat with right shoulder strap.
- Open **chest clip** and unbuckle 5-point straps.

2 Prepare 5-point buckle strap:

- Lay **5-point buckle** forward, toward front of positioner.
- Push **5-point buckle adjuster** button and pull on buckle strap to lengthen buckle strap to its longest position.

3 Place child in positioner:








- Place child in positioner with child's back flat against the positioner **back pad**.
- Remove any twists from straps.
- Position shoulder straps over child's shoulders. Back pad should be positioned so that shoulder straps exit at or just above child's shoulder.

4 Buckle 5-point straps:

- Make sure straps are not twisted.
- Insert **5-point buckle tongues** into **5-point buckle**. Listen for an audible click when each buckle tongue is fastened.
- Check buckle connection is secure by pulling on shoulder straps.

5 Evaluate buckle placement:

- When properly secured, the 5-point buckle should be positioned on child as shown in figure 5.

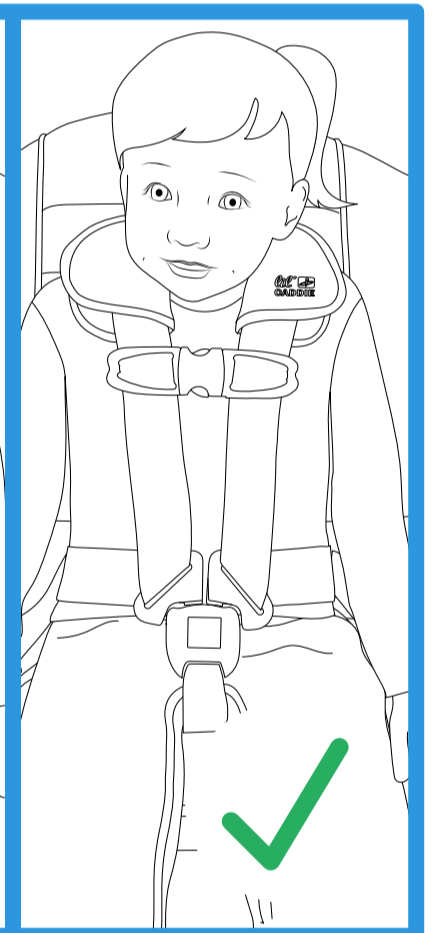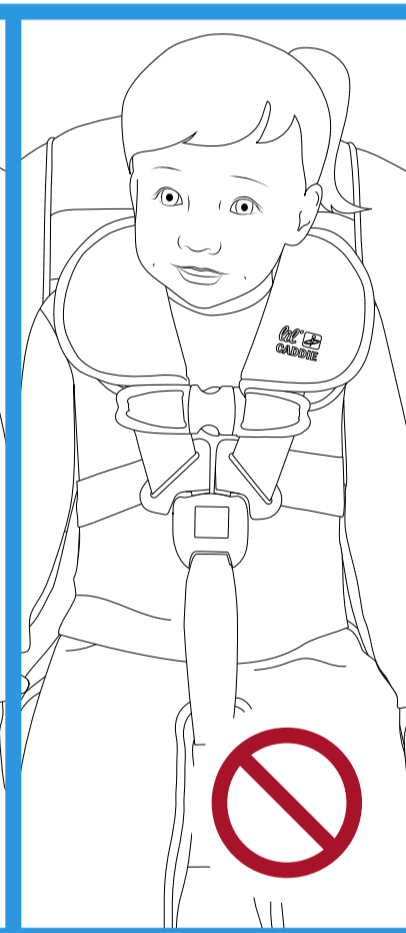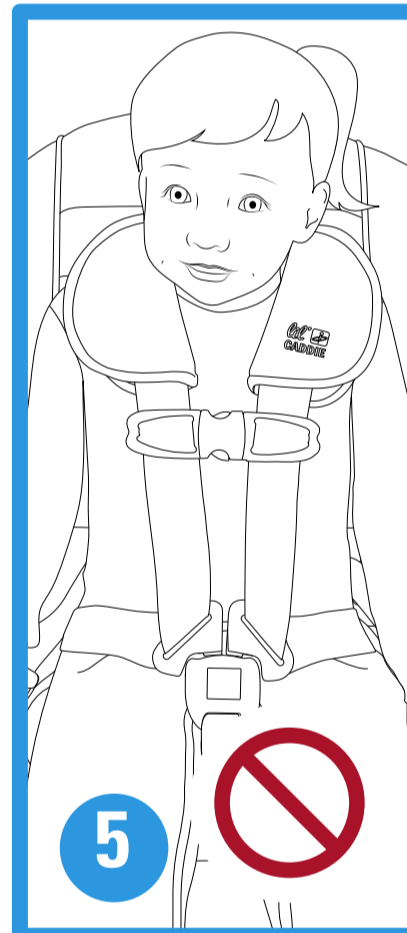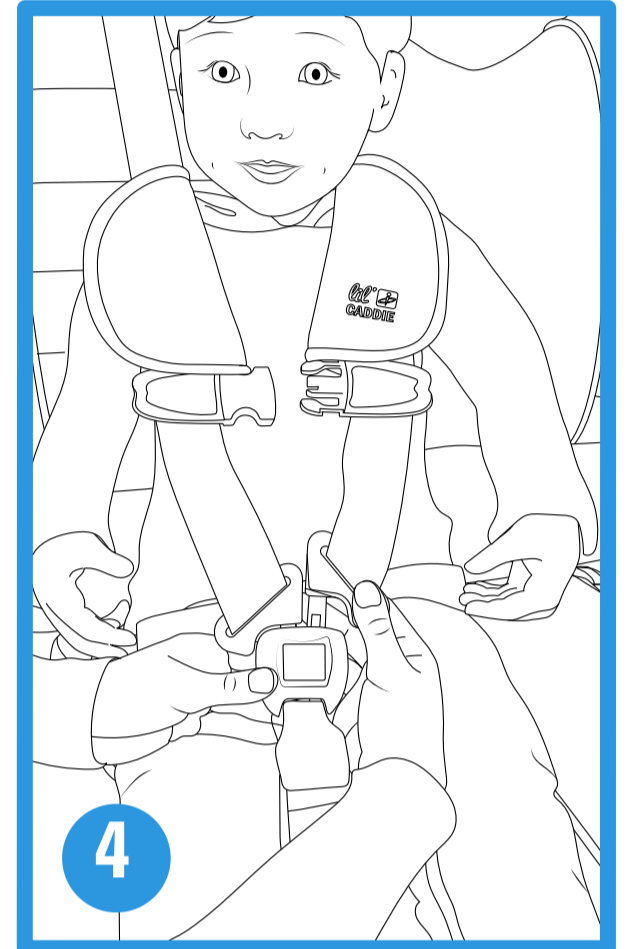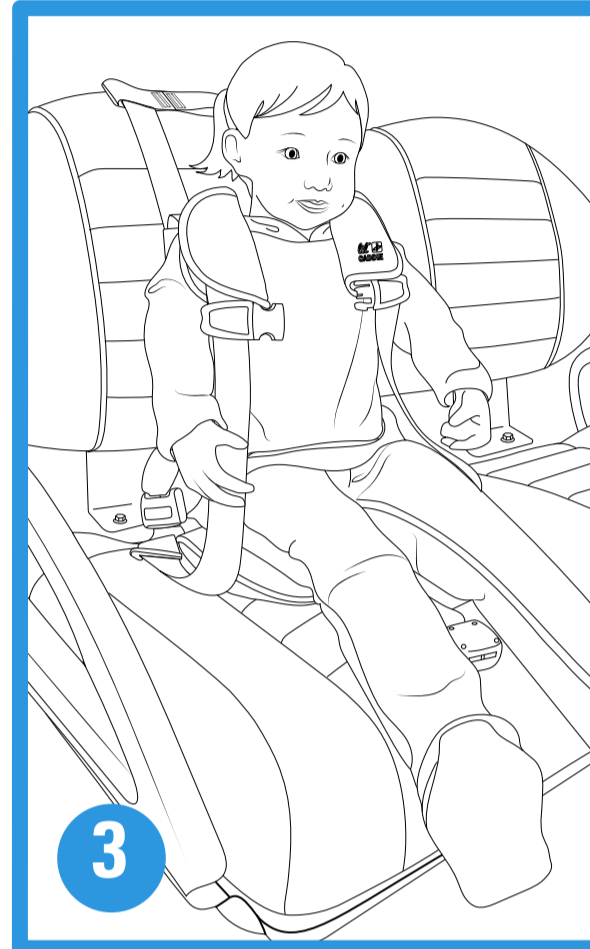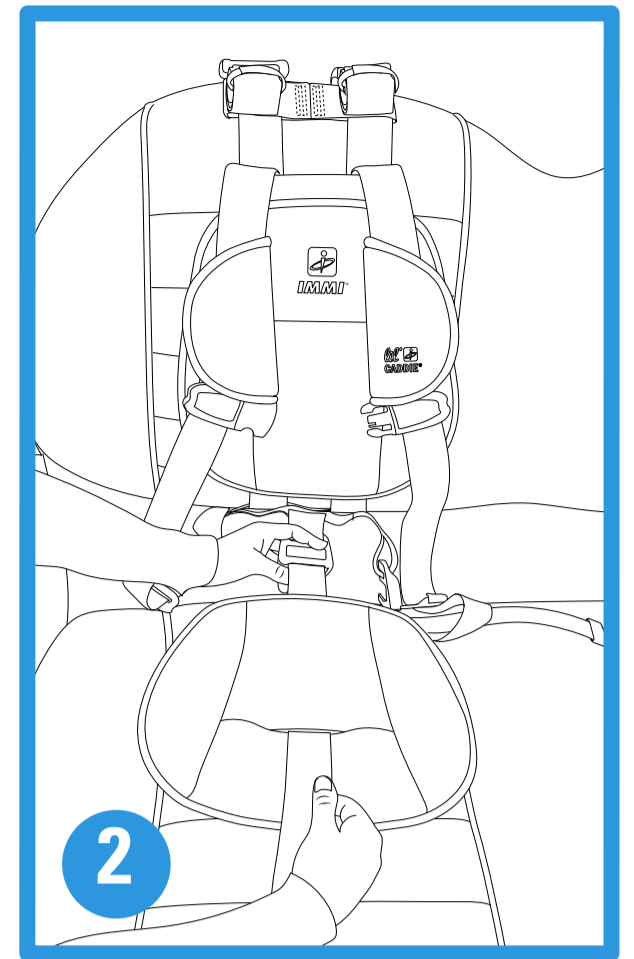
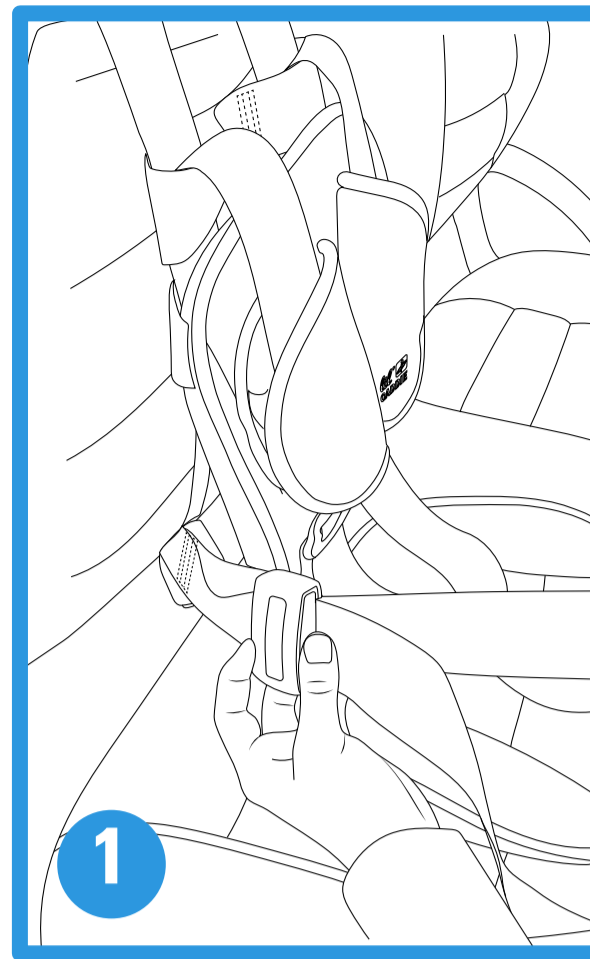


WARNING! DEATH or SERIOUS INJURY can occur:

Failure to follow all warnings and instructions can result in serious injury or death of your child.


6 Adjust buckle placement:

- If buckle is not positioned on child as shown in figure E, remove child. Pull on **5-point buckle adjuster strap** to adjust the buckle strap and retest length until the buckle strap properly fits the child.

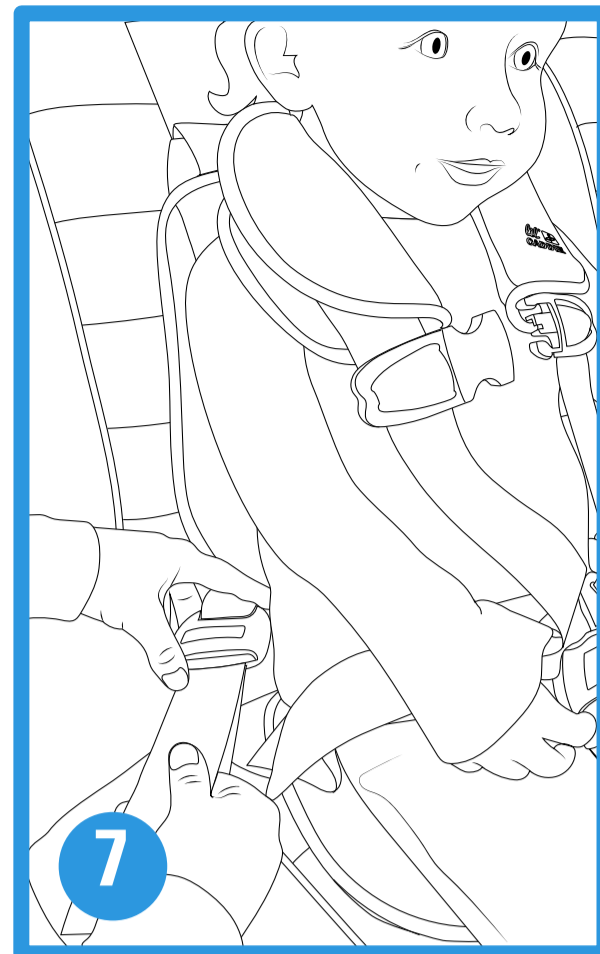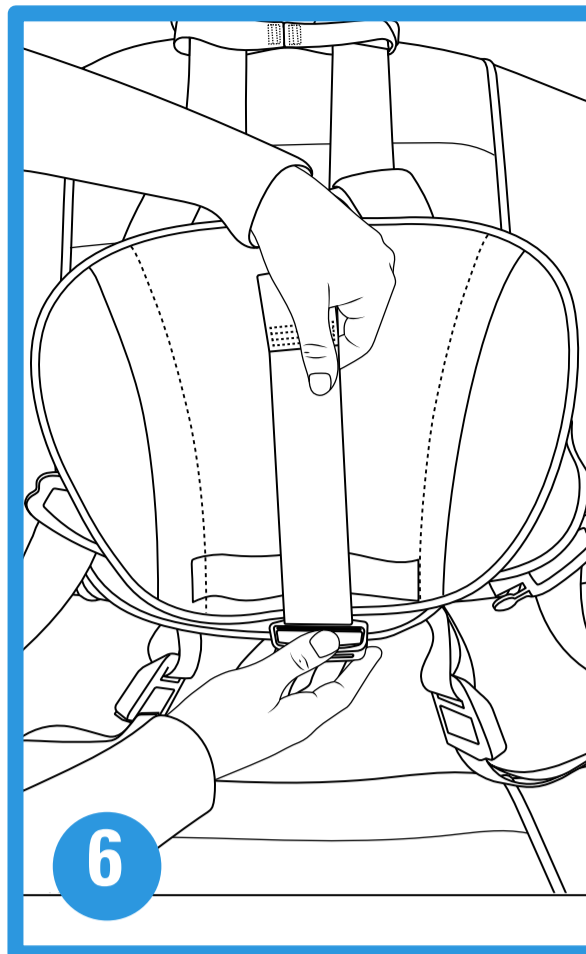

7 Tighten 5-Point Straps:

- Pull free end of 5-point strap, located on the outside of child's leg, until 5-point straps snug around the child.
- Repeat with second 5-point strap.
- A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.
- Be sure the 5-point strap is snug and tight on both the thighs and chest before each use.
- Once the 5-point strap is snug, use the Hook and loop strap keepers on each strap to secure the free ends of the left and right 5-point straps.

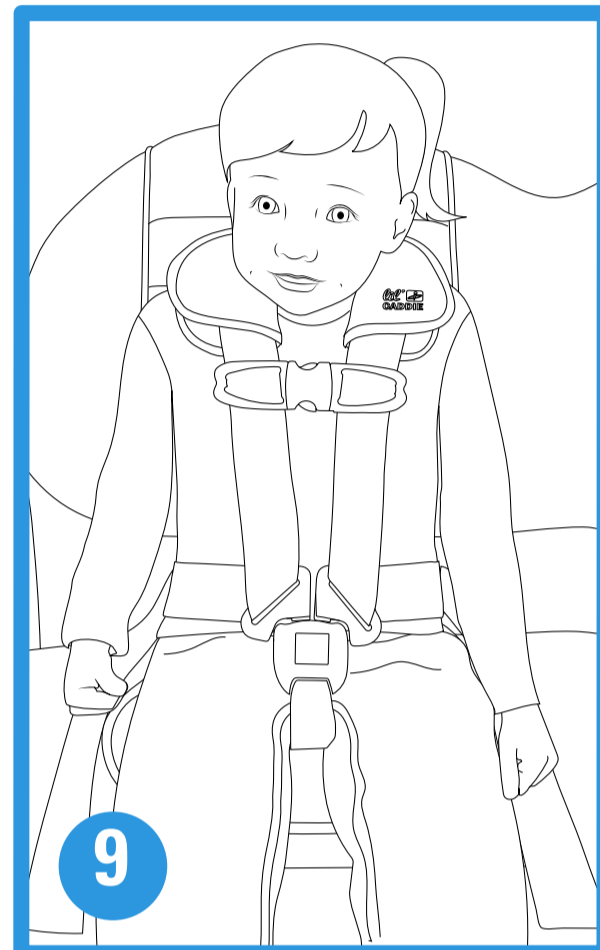

8 Fasten chest clip:

- Fasten chest clip by pushing both sides together. Position chest clip at middle of child's chest, at armpit level.

9 Evaluate 5-point straps:

- 5-point straps must appear as shown in figure 9 after installation is complete.

To remove child from the positioner:

- Open chest clip by squeezing middle tabs and pulling apart.
- Loosen 5-point straps: Pull shoulder strap while pushing button on 5-point adjuster located on outside of child's leg. Repeat with second 5-point strap.
- Pull buckle away from child. Unbuckle 5-point buckle by pressing down on red release button.
- Remove child and rebuckle 5-point buckle to prevent twisting.

WARNING! DEATH or SERIOUS INJURY can occur:

Failure to follow all warnings and instructions can result in serious injury or death of your child.

The **straps, back pad, base pad, and shoulder pads** can be cleaned with a damp cloth using mild soap solution and lukewarm water.

The seat pad is connected to the base with the use of hook and loop fasteners. To remove, pull up on the pad to remove from the base and disconnect the hook and loop fasteners on the back of the pad in two places.

Lil' Caddie Positioner Replacement

The Lil' Caddie Positioner system is considered to have a finite life and must be frequently inspected and replaced as needed. The default service life of a Lil' Caddie Positioner is 6 years from the date of manufacture. Use of the Lil' Caddie must be discontinued six years after the date of manufacture. The date of manufacture can be found on 5-point buckle adjuster strap.

The Lil' Caddie and its components must be inspected frequently (per instructions to the right). If you have any doubts about the condition or function of the positioner, **REPLACE IT**, even if it is less than 6 years from the date of service expiration.

If any component or part of the Lil' Caddie Positioner requires replacement, the entire system must be replaced.

Lil' Caddie In a Golf Cart Crash

If the golf cart is involved in a moderate or severe crash, the entire Lil' Caddie Positioner must be replaced regardless if the Lil' Caddie was occupied for use at the time of the crash.

Lil' Caddie Positioner Inspection

1. Inspect webbing on entire system for cuts, fraying, or extreme or unusual wear. Most common areas of belt wear include the buckle/latch area and any place where the positioner makes contact with the vehicle or seat.
Corrective action – Replace entire Lil' Caddie.
2. Inspect latch and buckle for proper operation by inserting the latch into the buckle. Latch must insert smoothly, and you must hear an audible click. Verify proper latching by tugging on the belt. Latch must not be worn, deformed or corroded. Buckle must not be damaged, cracked or broken.
Corrective action – Replace entire Lil' Caddie.
3. Inspect the seat belt height adjuster for damage. Move adjuster up and down. It must move freely and should not be damaged, cracked or broken.
Corrective action – Replace entire Lil' Caddie.
4. Inspect dual seat wrap system for cuts, fraying, or extreme or unusual wear.
Corrective action – Replace entire Lil' Caddie.
5. Inspect chest clips for damage and operation. Chest clip halves should not be damaged, cracked or broken. Clips should engage and disengage smoothly with each other. Move clip halves up and down. They must move freely.
Corrective action – Replace entire Lil' Caddie.

