



SRC PIPE

VICTORIA



RCPA, the Australian Pipe Company,
is the leading manufacturer of
Vertically Cast Concrete Pipes
in Australia.


The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process

SRCPIPE

Rubber Ring Joint

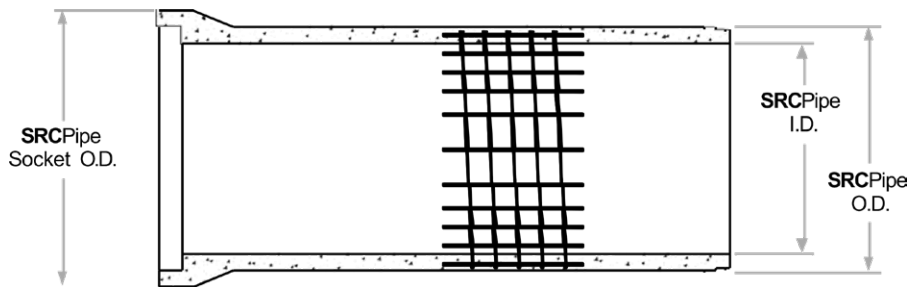


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	292	455	-	-	376	-	-	249
375	370	546	-	-	459	-	-	333
450	447	643	-	-	544	-	-	475
525	522	734	-	-	652	-	-	766
600	597	825	-	-	727	-	-	854
675	671	914	-	-	820	-	-	1077
750	746	1005	876	876	908	1064	1073	1276
825	821	1093	961	961	1012	1233	1242	1608
900	896	1184	1048	1076	1076	1457	1712	1739
1050	1046	1344	1213	1241	1241	1733	2086	2100
1200	1196	1532	1373	1405	1405	2244	2657	2662
1350	1345	1690	1520	1581	1581	2671	3204	3221
1500	1495	1910	1730	1730	1730	3832	3876	3884
1650	1645	2056	1838	1930	1930	3633	4993	5003
1800	1794	2226	2001	2100	2100	4109	5854	5887
1950	1944	2390	-	-	2260	-	-	6214
2100	2094	2556	2300	2400	2400	5030	6779	6840
2400	2394	2920	2730	2730	2730	8277	8303	8277
2700	2694	3250	3050	3050	-	9821	9821	-

*Dimensions and weights subject to change

- Effective length DN1950, DN2400 & DN2700 = 2300mm
- Effective length for all other DN = 2340mm
- Other classes available on request
- Pipes listed conform with AS/NZS 4058:2007 Normal exposure conditions
- Marine or aggressive exposure conditions available on request
- Rubber rings supplied
- DN300-375 supplied without lifting holes
- DN450-1800 & DN2100 supplied with lifting holes
- DN1950, DN2400-2700 supplied with Unilift anchors

SRCPIPE

Flush Joint

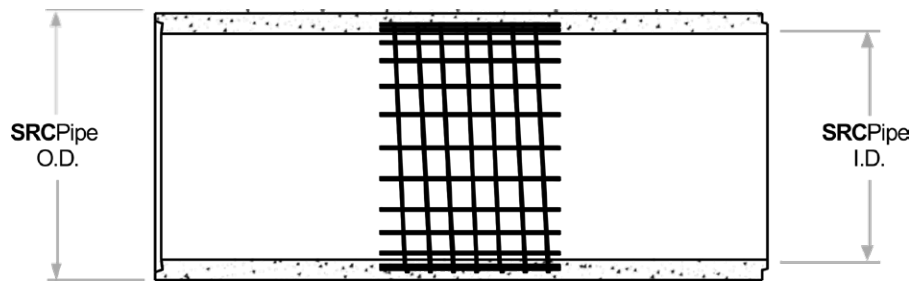

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)	Weight (kg)
		Class 2	Class 2
750	746	874	938
825	821	961	1130
900	896	1040	1324
1050	1046	1196	1543
1200	1196	1360	1880
1350	1345	1520	2300
1500	1495	1680	2705
1650	1645	1848	2974
1800	1794	1996	3772
1950	1944	2260	6171
2100	2094	2330	4886
2400	2394	2730	7997
2700	2694	3050	9474

*Dimensions and weights subject to change

- Effective length DN1950, DN2400 & DN2700 = 2425mm
- Effective length for all other DN = 2340mm
- Sealing bands available on request
- Other classes available on request
- Pipes listed conform with AS/NZS 4058:2007 Normal exposure conditions
- Marine or aggressive exposure conditions available on request
- DN750-1800 & DN2100 supplied with lifting holes
- DN1950, DN2400-2700 supplied with Unilift anchors



1800 88 7272

www.rcpa.com.au

Issue: July 2026