



SRC PIPE

VICTORIA



RCPA, the Australian Pipe Company, is the leading manufacturer of Vertically Cast Concrete Pipes in Australia.


The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process

SRCPIPE

Rubber Ring Joint

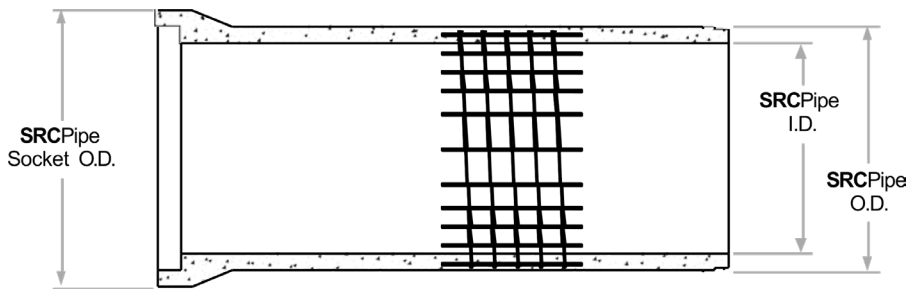


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
225	222	385	-	-	297	-	-	196
300	297	465	-	-	372	-	-	247
375	372	555	-	-	452	-	-	331
450	447	650	-	-	544	-	-	472
525	522	735	-	-	660	-	-	762
600	597	830	-	-	728	-	-	849
675	671	920	-	-	821	-	-	1071
750	746	1010	878	878	906	1059	1068	1270
825	821	1095	960	960	1008	1266	1236	1601
900	896	1185	1048	1078	1078	1449	1707	1731
1050	1046	1344	1198	1235	1235	1725	2078	2091
1200	1196	1535	1368	1405	1405	2234	2647	2650
1350	1345	1695	1528	1564	1564	2656	3187	3204
1500	1495	1910	1730	1730	1730	3812	3855	3862
1650	1645	2056	1840	1935	1935	3608	4963	4978
1800	1794	2230	1995	2105	2105	4082	5827	5860
1950	1944	2390	2260	2260	2260	6308	6347	6413
2100	2094	2560	2300	2400	2400	4999	6747	6810
2400	2394	2920	2730	2730	2730	8539	8566	8600
2700	2694	3250	3050	3050	-	10134	10134	-
3000	2995	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3300	3295	TBA	TBA	TBA	TBA	TBA	TBA	TBA
3600	3595	TBA	TBA	TBA	TBA	TBA	TBA	TBA

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request
- DN375 and smaller manufactured without lifting holes
- DN450-DN1800 & DN2100 supplied with lifting holes
- DN1950, DN2400-DN2700 supplied with Unilift anchors

SRCPIPE

Flush Joint

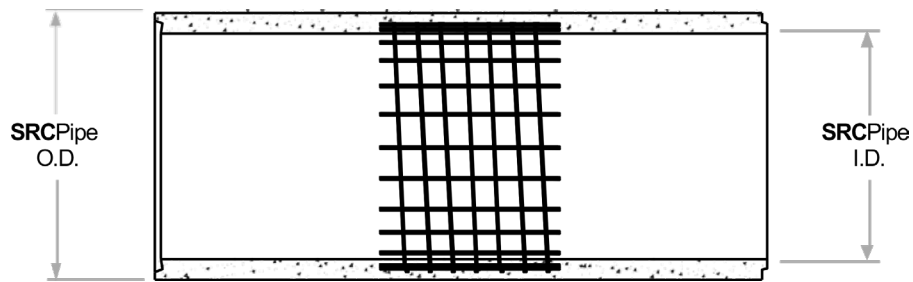

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)	Weight (kg)
		Class 2	Class 2
750	746	874	938
825	821	961	1133
900	896	1046	1324
1050	1046	1195	1543
1200	1196	1356	1879
1350	1345	1520	2298
1500	1495	1680	2702
1650	1645	1830	2970
1800	1794	1995	3502
1950	1944	2260	5943
2100	2094	2334	4877
2400	2394	2730	7622
2700	2694	3050	8986
3000	TBA	TBA	TBA
3300	TBA	TBA	TBA
3600	TBA	TBA	TBA

*Dimensions and weights subject to change

- Effective length = 2340mm
- Sealing bands available on request
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request
- DN750-DN1800 & DN2100 supplied with lifting holes
- DN1950, DN2400-DN2700 supplied with Unilift anchors



1800 88 7272

www.rcpa.com.au

Issue: February 2025