

SRC PIPE

NEW SOUTH WALES



RCPA, the Australian Pipe Company, is the leading manufacturer of Vertically Cast Concrete Pipes in Australia.


The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process

SRCPIPE

Rubber Ring Joint

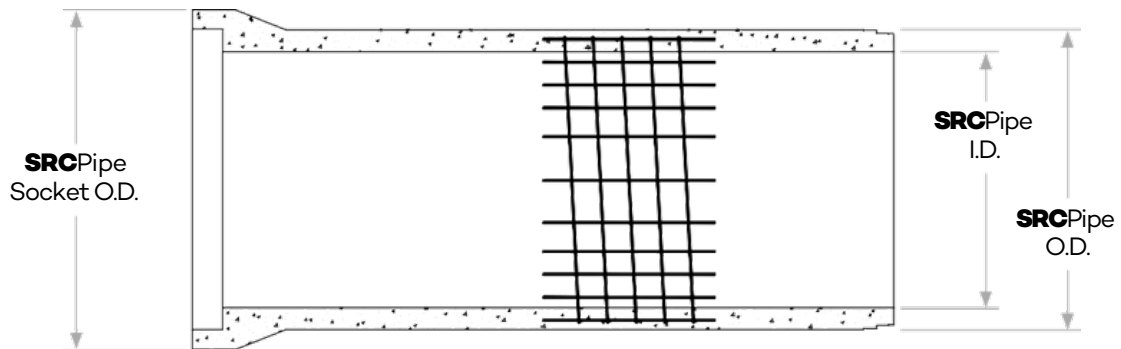

Somersby

| Nom. ID (mm) | Pipe ID (mm) | Socket OD (mm) | Pipe OD (mm) | | | Weight (kg) | | |
|--------------|--------------|----------------|--------------|---------|---------|-------------|---------|---------|
| | | | Class 2 | Class 3 | Class 4 | Class 2 | Class 3 | Class 4 |
| 375 | 372 | 546 | - | - | 449 | - | - | 316 |
| 450 | 447 | 643 | - | - | 540 | - | - | 467 |
| 525 | 522 | 734 | - | 621 | 621 | - | 580 | 586 |
| 600 | 597 | 825 | 700 | 700 | 700 | 698 | 701 | 718 |
| 675 | 671 | 913 | 781 | 781 | 781 | 832 | 836 | 846 |
| 750 | 746 | 1004 | 870 | 870 | 870 | 1026 | 1030 | 1039 |
| 825 | 821 | 1093 | 951 | 951 | 951 | 1174 | 1181 | 1197 |
| 900 | 896 | 1184 | 1038 | 1038 | 1038 | 1394 | 1407 | 1435 |
| 1050 | 1046 | 1345 | 1188 | 1188 | 1188 | 1641 | 1656 | 1691 |

Thornton

| Nom. ID (mm) | Pipe ID (mm) | Socket OD (mm) | Pipe OD (mm) | | | Weight (kg) | | |
|--------------|--------------|----------------|--------------|---------|---------|-------------|---------|---------|
| | | | Class 2 | Class 3 | Class 4 | Class 2 | Class 3 | Class 4 |
| 900 | 896 | 1184 | 1044 | 1044 | 1044 | 1434 | 1466 | 1488 |
| 1050 | 1046 | 1345 | 1198 | 1198 | 1198 | 1726 | 1756 | 1792 |
| 1200 | 1196 | 1527 | 1400 | 1400 | 1400 | 2547 | 2583 | 2630 |
| 1350 | 1345 | 1690 | 1570 | 1570 | 1570 | 3137 | 3169 | 3188 |
| 1500 | 1495 | 1910 | 1730 | 1730 | 1730 | 3795 | 3824 | 3872 |
| 1650 | 1645 | 2053 | 1840 | - | - | 3638 | - | - |
| 1800 | 1794 | 2223 | 1996 | - | - | 4148 | - | - |
| 2100 | 2094 | 2553 | 2300 | - | - | 5041 | - | - |

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine environment pipes available on request
- DN600 and smaller manufactured without lifting holes
- DN675 and larger supplied with lifting holes



1800 88 7272

www.rcpa.com.au

Issue: February 2025