



SRC PIPE

QUEENSLAND



RCPA, the Australian Pipe Company,
is the leading manufacturer of
Vertically Cast Concrete Pipes
in Australia.


The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process

SRCPIPE

Rubber Ring Joint - Normal

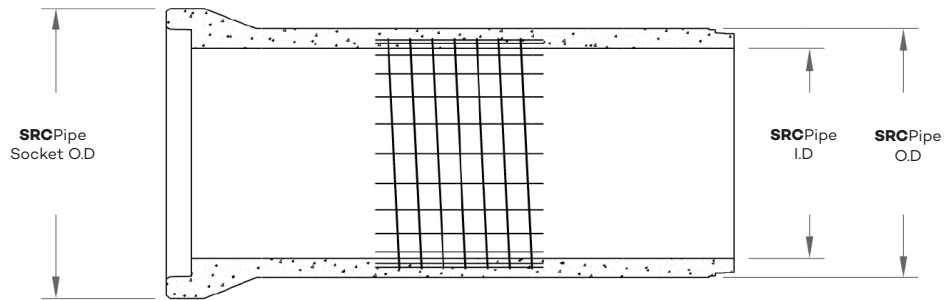


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	292	455			376			255
375	370	546			459			348
450	447	643			544			465
525	522	734		627	652		592	714
600	597	825		714	727		755	829
675	671	914		791	820		874	1059
750	746	1005		876	908		1046	1273
825	821	1093		961	1012		1233	1623
900	896	1184		1076	1076		1669	1696
1050	1046	1344	1213	1241	1241	1839	2124	2127
1200	1196	1532	1373	1405	1405	2272	2618	2627
1350	1345	1690	1520	1581	1581	2558	3288	3347
1500	1495	1910	1730	1730	1730	3780	3833	3860
1650	1645	2056	1838	1930	1930	3576	4830	4870
1800	1794	2226	2001	2100	2100	4160	5646	5689
2100	2094	2556	2300	2400	2400	4930	6677	6739

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- DN450 and smaller manufactured without lifting holes
- DN525-DN2100 supplied with lifting holes

SRCPIPE

Rubber Ring Joint - Marine

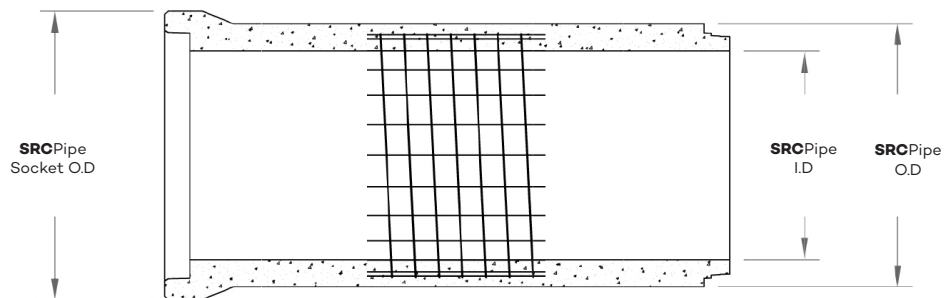

Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	292	455			416			381
375	370	546			491			470
450	447	643			566			564
525	522	734		652	652		713	714
600	597	825		727	727		829	829
675	671	914		820	820		1057	1063
750	746	1005		908	908		1267	1274
825	821	1093		1012	1012		1615	1626
900	896	1184		1076	1076		1672	1696
1050	1046	1344	1213	1241	1241	1839	2124	2127
1200	1196	1532	1373	1405	1405	2272	2618	2627
1350	1345	1690	1520	1581	1581	2558	3323	3368
1500	1495	1910	1730	1730	1730	3780	3857	3877
1650	1645	2056	1838	1930	1930	3576	4830	4870
1800	1794	2226			2100			5727
2100	2094	2556	2300			4930		

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for marine environment exposure conditions
- DN450 and smaller manufactured without lifting holes
- DN525-DN2100 supplied with lifting holes



1800 88 7272

www.rcpa.com.au

Issue: November 2025