



SRCPIPE

QUEENSLAND



RCPA, the Australian Pipe Company,
is the leading manufacturer of
Vertically Cast Concrete Pipes
in Australia.


The dry-cast pipe making process was introduced to Australia by RCPA and has been in use for two decades. Vertically casting is the most efficient method of pipe manufacture available.

Benefits of RCPA SRC Pipes;

- Rapid production rates
- Pipes comply with AS/NZS 4058:2007
- Precision Manufacturing technology
- Low impact and sustainable process

SRCPIPE

Rubber Ring Joint - Normal

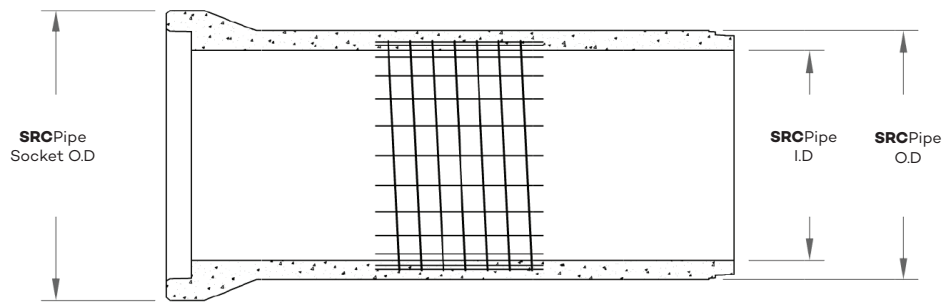


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	292	455	-	-	376	-	-	253
375	370	546	-	-	459	-	-	347
450	447	643	-	544	544	-	462	464
525	522	734	627	627	652	588	589	711
600	597	825	714	714	727	748	751	824
675	671	914	791	791	820	865	869	1048
750	746	1005	876	876	908	1037	1041	1265
825	821	1093	961	961	1012	1218	1277	1617
900	896	1184	1048	1076	1076	1436	1663	1689
1050	1046	1344	1213	1241	1241	1832	2117	2118
1200	1196	1532	1373	1405	1405	2263	2609	2616
1350	1345	1690	1520	1581	1581	2544	3273	3330
1500	1495	1910	1730	1730	1730	3759	3810	3838
1650	1645	2056	1838	1930	1930	3550	4803	4845
1800	1794	2226	2001	2100	2100	4131	5617	5662
2100	2094	2556	2300	2400	2400	4897	6645	6709

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- DN375 and smaller manufactured without lifting holes
- DN450-DN2100 supplied with lifting holes

SRCPIPE

Rubber Ring Joint - Marine

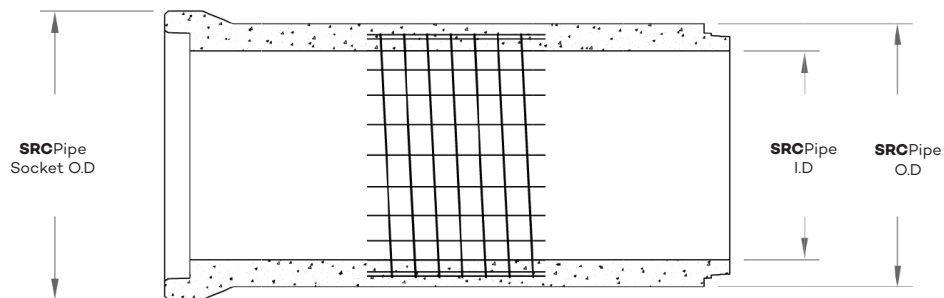


Nom. ID (mm)	Pipe ID (mm)	Socket OD (mm)	Pipe OD (mm)			Weight (kg)		
			Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
300	292	455	-	-	416	-	-	380
375	370	546	-	-	491	-	-	468
450	447	643	-	566	566	-	560	562
525	522	734	652	652	652	708	709	711
600	597	825	727	727	727	821	825	825
675	671	914	820	820	820	1045	1046	1051
750	746	1005	908	908	908	1258	1262	1269
825	821	1093	961	1012	1012	1218	1609	1620
900	896	1184	1048	1076	1076	1437	1665	1689
1050	1046	1344	1213	1241	1241	1832	2117	2118
1200	1196	1532	1373	1405	1405	2263	2609	2616
1350	1345	1690	1520	1581	1581	2544	3304	3351
1500	1495	1910	1730	1730	1730	3759	3835	3856
1650	1645	2056	1838	1930	1930	3350	4803	4845
1800	1794	2226	-	-	2100	-	-	5701
2100	2094	2556	2300	-	-	4897	-	-

*Dimensions and weights subject to change

- Effective length = 2340mm
- Rubber rings supplied with all pipes
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for marine environment exposure conditions
- DN375 and smaller manufactured without lifting holes
- DN450-DN2100 supplied with lifting holes

SRCPIPE

Flush Joint - Normal

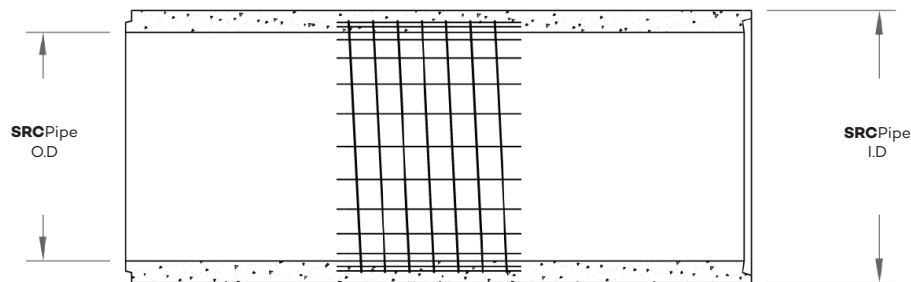

Nom. ID (mm)	Pipe ID (mm)	Pipe OD (mm)			Weight (kg)		
		Class 2	Class 3	Class 4	Class 2	Class 3	Class 4
900	896	1040	1076	1076	1192	1518	1534
1050	1046	1196	1238	1238	1443	1908	1917
1200	1196	1360	1406	1406	1776	2357	2369
1350	1345	1520	1570	1570	2109	2835	2859
1500	1495	1680	1730	1730	2522	3276	3284
1650	1645	1848	1930	1930	3022	4372	4381
1800	1794	1996	2080	2080	3268	4762	4768
2100	2094	2330	2390	2390	4411	5647	5659

*Dimensions and weights subject to change

- Effective length = 2340mm
- External seal bands (sand bands) supplied separately
- Other classes available on request
- Pipes listed above conform with AS/NZS 4058:2007 for normal environment exposure conditions
- Marine or aggressive environment pipes available upon request
- DN375 and smaller manufactured without lifting holes
- DN450-DN2100 supplied with lifting holes



1800 88 7272

www.rcpa.com.au

Issue: September 2025