


Brava Cedar Shake







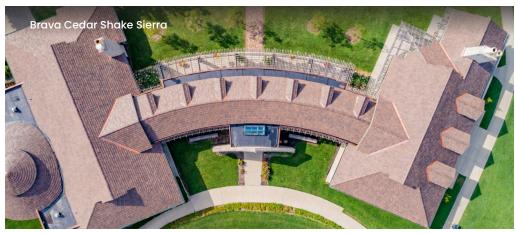

Beautifully authentic high-performance roofing.

The beautiful look of a cedar shake roof without the maintenance.

Truly realistic

Our proprietary process creates the most authentic-looking cedar shake on the market.

Superior performance

Brava is designed to withstand even the most severe weather, boasting the highest hail resistance rating in the industry.

Enhanced curb appeal

Curb appeal directly correlates with owner satisfaction and higher property value.

Maintenance free

Brava's proprietary formulation ensures extreme durability.

Color technology

Brava's proprietary multi-coloring process means you get the authentic appearance of a natural product, complete with variegated colors throughout the entire product.

Fully sustainable

Brava uses recycled material to create a roof that is fully recyclable.

Complete

Brava offers a complete line of accessory tiles.

Unparalleled Performance

ged	Arendale	Description	Weight	Dimensions
		Shake Field Tile 5"	1.3 lbs.	5″ x 22″; 10″ Exposure
		Shake Field Tile 7"	1.6 lbs.	7" x 22"; 10" Exposure
		Shake Field Tile 12"	2.65 lbs.	12" x 22"; 10" Exposure
		Starter	2.0 lbs.	12″ x 14″
spen	Lake Forest	Hip/Ridge	1.9 lbs.	5 ³/ ₈ ″ x 6″ x 14″
		Solid Shake Accessory	4.25 lbs.	12" x 22"; 10" Exposure
		Weight Per Square	312 lbs./s	sq.
			Dumum	
		Aesthetics	Brava Shake	Natural Shake
ght Arendale	Natural	Authentic Look	\checkmark	\checkmark
		5/8" to 1" Thickness	\checkmark	Varies by manufacturer
		Hand Split: True-to-Life Texture	\checkmark	\checkmark
		Mineral-Infused Process for Authentic Color	\checkmark	\checkmark
		Performance	Brava Shake	Natural Shake
nyx	Sierra	Not Prohibited in Many Jurisdictions	\checkmark	
		Fire Retardant: Class A or Class C	\checkmark	Varies by manufacturer; needs treatment with corrosive chemicals
		Wind Resistance: 110+ mph	\checkmark	\checkmark
		Impact Resistance: Class 4	\checkmark	Natural shake is vulnerable to hail
		Freeze/Thaw Resistant	\checkmark	
		Maintenance Free	\checkmark	Requires replacement of individual shakes throughout life cycle
/eathered		Colorfast	\checkmark	
		Hail Warrantied	\checkmark	
		Installation	Brava Shake	Natural Shake
		Factory-Collated Color Blends	\checkmark	\checkmark
		Factory-Collated Widths	\checkmark	\checkmark
		Estimated Waste Factor	Low	High; shakes too narrow or broken during installation must be discarded



Ag

As

O





The printed colors shown may vary from actual colors. Before making a final selection, be sure to review actual material samples and roof installations. Please contact your salesperson for further assistance.

Tolerances +or- 1/2". All specifications subject to change without notice.

In order to achieve certain fire and wind ratings, special installation instructions may be required. Please reference Brava Roof Tile installation manuals at www.BravaRoofTile.com for more details.

APPROVED