


MOTOR FRAMES:
364TC-365TC

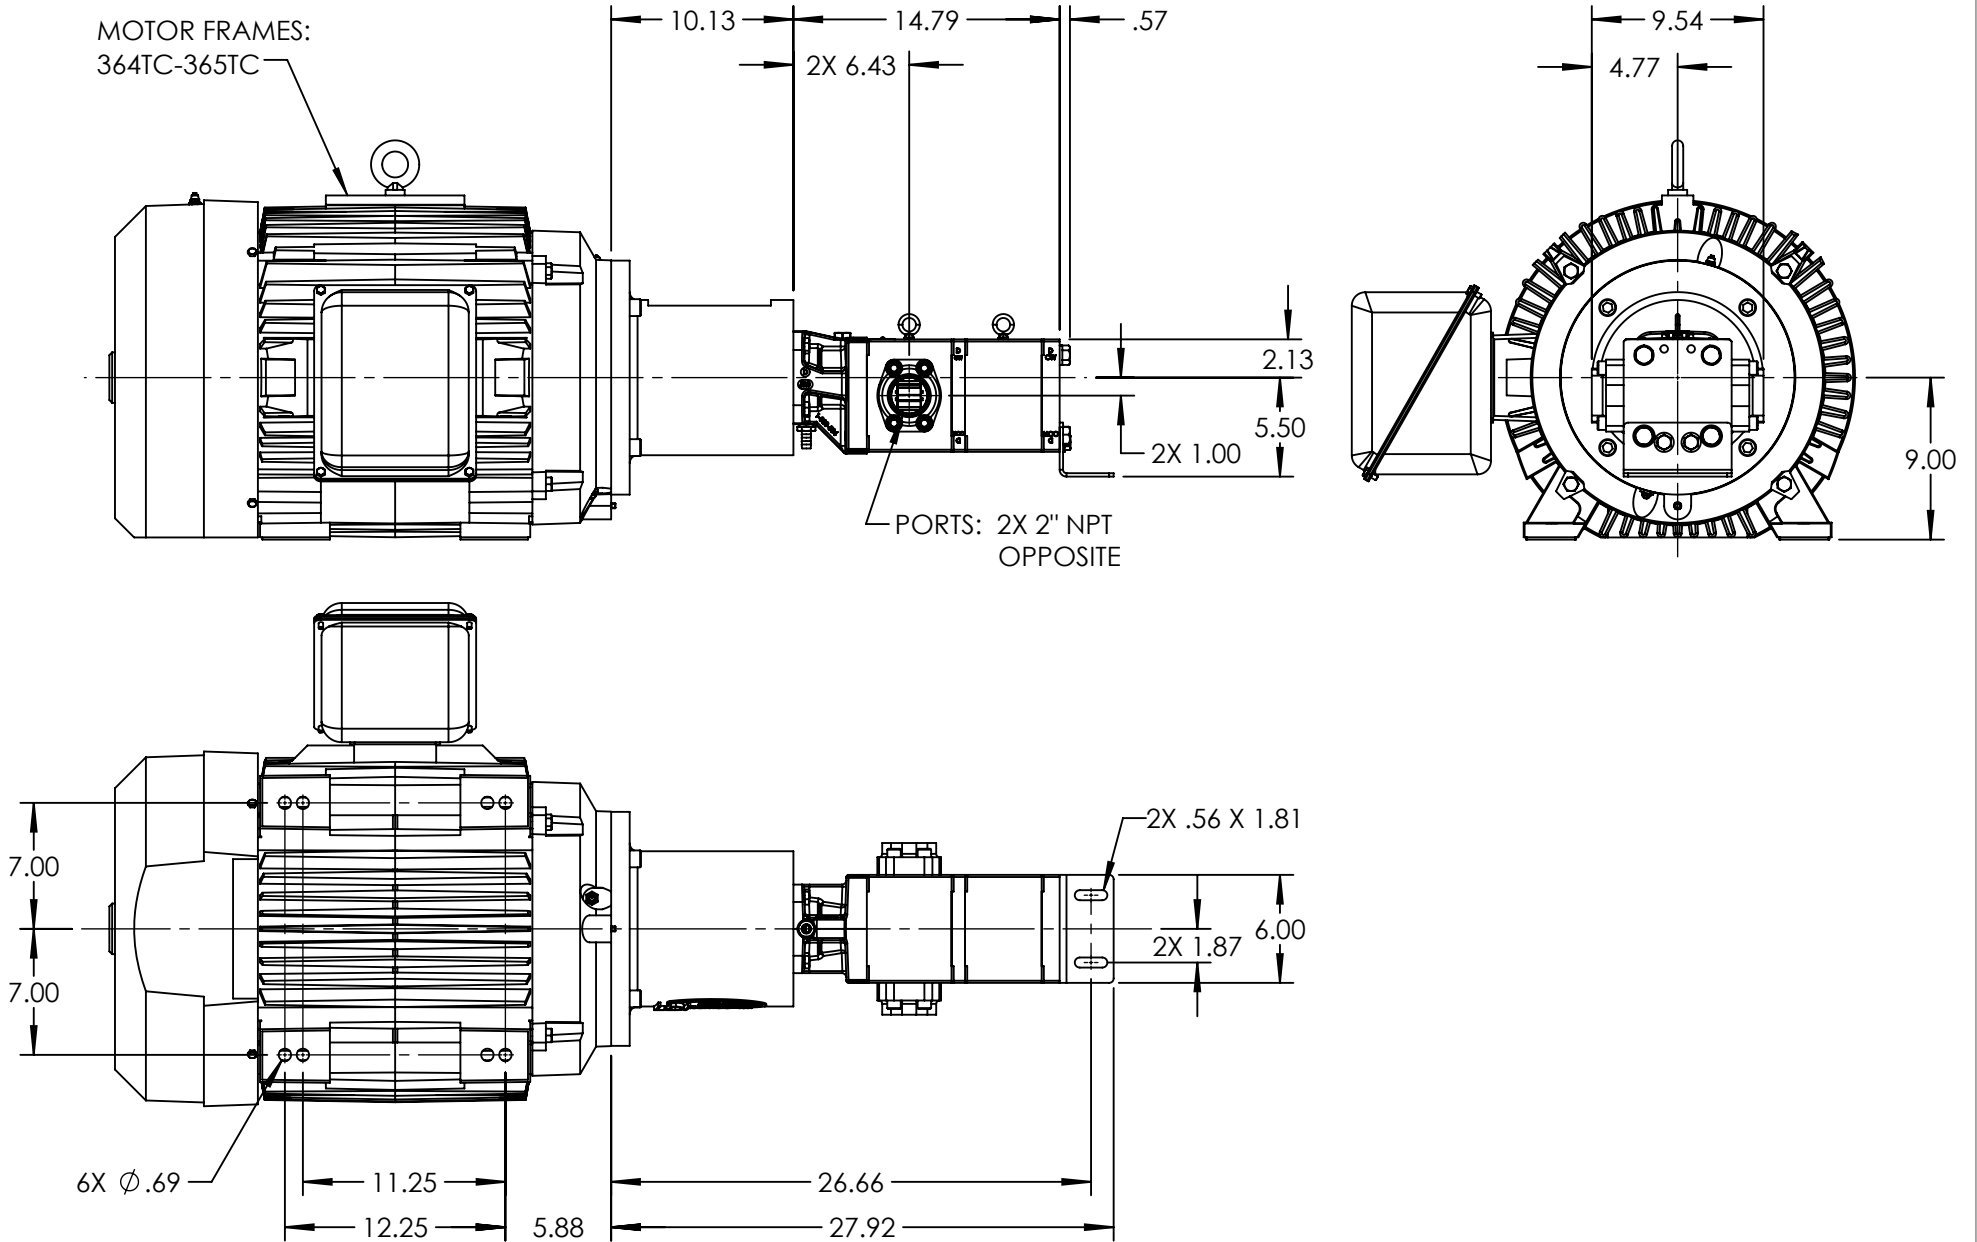

PORTS: 2X 2" NPT
OPPOSITE

STANDARD MODELS: GB-41022-G00-M, GB-41022-G10-M

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

STATE	Released	02/18/2022
DRAWN	bmanernach	2/18/2022
CHECKED	BAM	02/18/2022

DIMENSIONS ARE IN INCHES
PROJECT: E331
WAS:



VIKING PUMP, INC.
A Unit of IDEX Corporation
Cedar Falls, IA 50613
U.S.A.


THIS DRAWING IS THE PROPERTY OF
VIKING PUMP, INC. AND IS PROPRIETARY
IN GENERAL AND DETAIL. IT SHALL NOT BE
COPIED OR ITS CONTENTS REVEALED TO
OUTSIDE PARTIES WITHOUT THE WRITTEN
CONSENT OF VIKING PUMP, INC.

3D

DWG. NO. GPV-1022-005-U
SHEET 1 OF 1

REV. A.0
02/18/2022

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: W22 NEMA Premium Efficiency Three-Phase		Product code : 12205951 Catalog # : 06018ET3E364TC-W22	
Frame : 364/5TC		Locked rotor time : 27s (cold) 15s (hot)			
Output : 60 HP (45 kW)		Temperature rise : 80 K			
Poles : 4		Duty cycle : Cont.(S1)			
Frequency : 60 Hz		Ambient temperature : -20°C to +40°C			
Rated voltage : 230/460 V		Altitude : 1000 m.a.s.l.			
Rated current : 143/71.6 A		Protection degree : IP55			
L. R. Amperes : 888/444 A		Cooling method : IC411 - TEFC			
LRC : 6.2x(Code G)		Mounting : F-1			
No load current : 52.0/26.0 A		Rotation ¹ : Both (CW and CCW)			
Rated speed : 1780 rpm		Noise level ² : 67.0 dB(A)			
Slip : 1.11 %		Starting method : Direct On Line			
Rated torque : 177 ft.lb		Approx. weight ³ : 908 lb			
Locked rotor torque : 220 %					
Breakdown torque : 240 %					
Insulation class : F					
Service factor : 1.25					
Moment of inertia (J) : 22.4 sq.ft.lb					
Design : B					
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	94.1	94.5	95.0	Max. traction : 1222 lb	
Power Factor	0.71	0.80	0.83	Max. compression : 2130 lb	
		<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6314 C3		6314 C3	
Sealing	:	WSeal		WSeal	
Lubrication interval	:	12000 h		12000 h	
Lubricant amount	:	27 g		27 g	
Lubricant type	:	Mobil Polyrex EM			
Notes USABLE @208V 151A SF 1.10 SFA 166A					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	07/07/2020			1 / 6	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12205951

Catalog # : 06018ET3E364TC-W22

TORQUE AND CURRENT VS SPEED CURVE

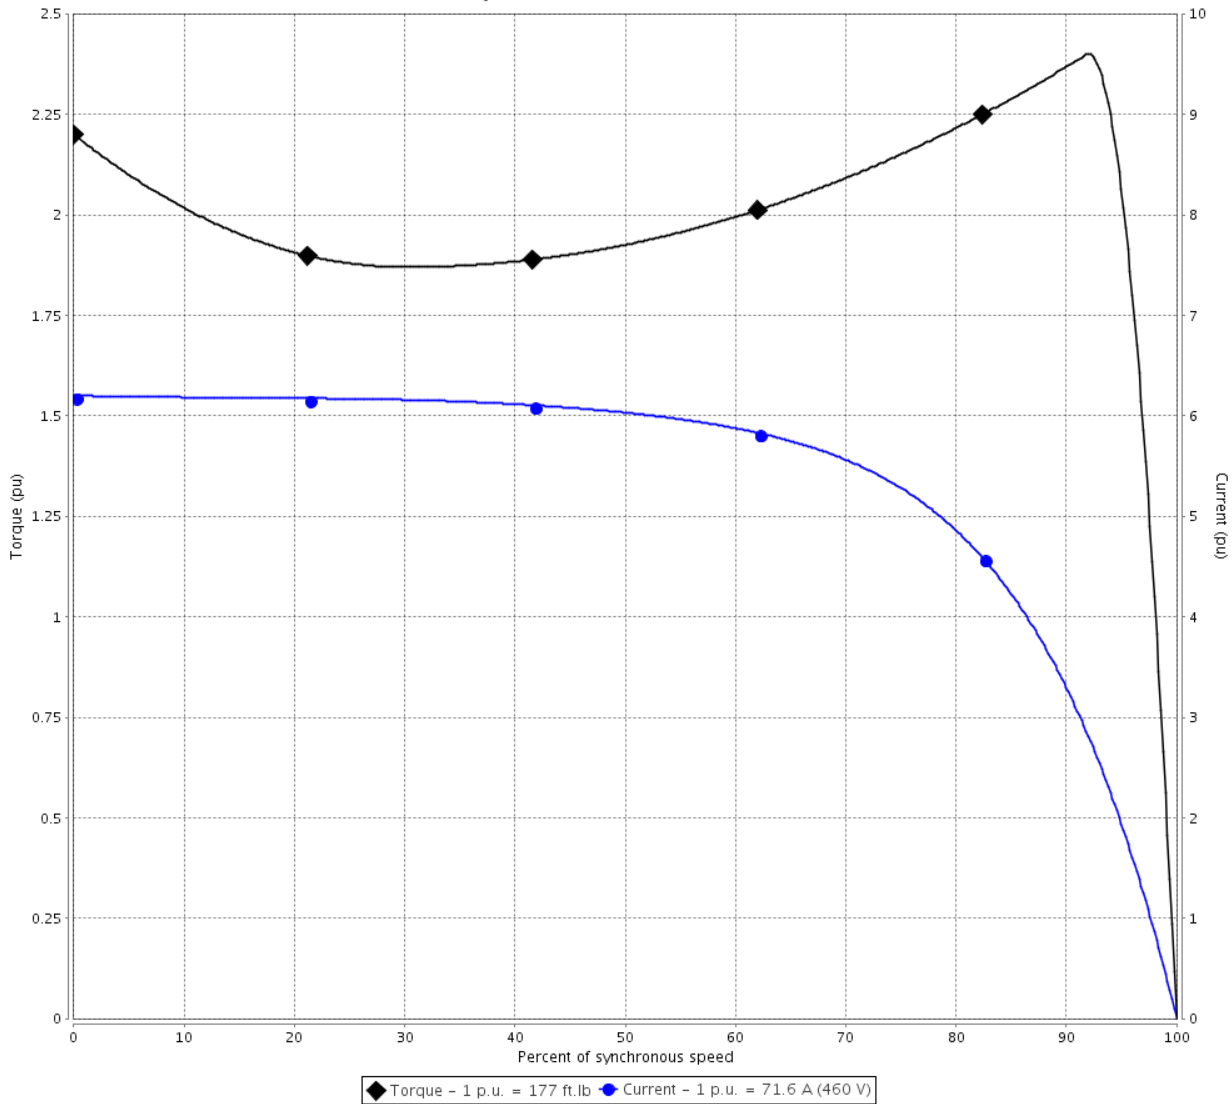

Performance : 230/460 V 60 Hz 4P

Rated current : 143/71.6 A
LRC : 6.2
Rated torque : 177 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 240 %
Rated speed : 1780 rpm

Moment of inertia (J) : 22.4 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Locked rotor time : 27s (cold) 15s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 6	Revision
Checked by				
Date	07/07/2020			

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12205951

Catalog # : 06018ET3E364TC-W22

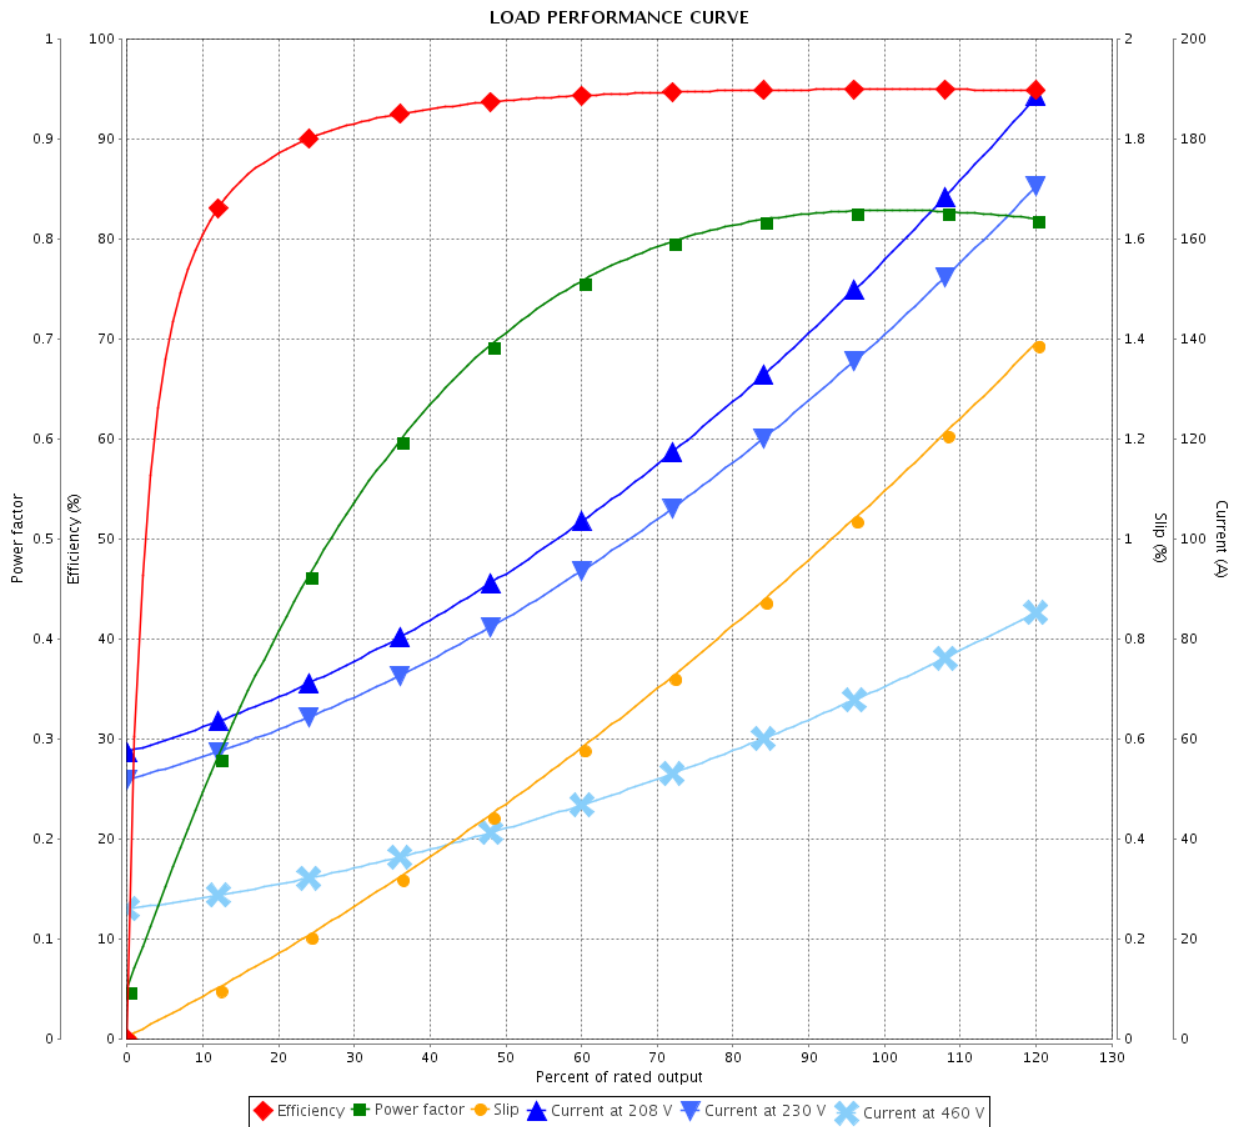

Performance : 230/460 V 60 Hz 4P

Rated current : 143/71.6 A
 LRC : 6.2
 Rated torque : 177 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 240 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 22.4 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

THERMAL LIMIT CURVE



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12205951

Catalog # : 06018ET3E364TC-W22

Performance : 230/460 V 60 Hz 4P

Rated current : 143/71.6 A
LRC : 6.2
Rated torque : 177 ft.lb
Locked rotor torque : 220 %
Breakdown torque : 240 %
Rated speed : 1780 rpm

Moment of inertia (J) : 22.4 sq.ft.lb
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Heating constant

Cooling constant


Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	07/07/2020		4 / 6	

THERMAL LIMIT CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

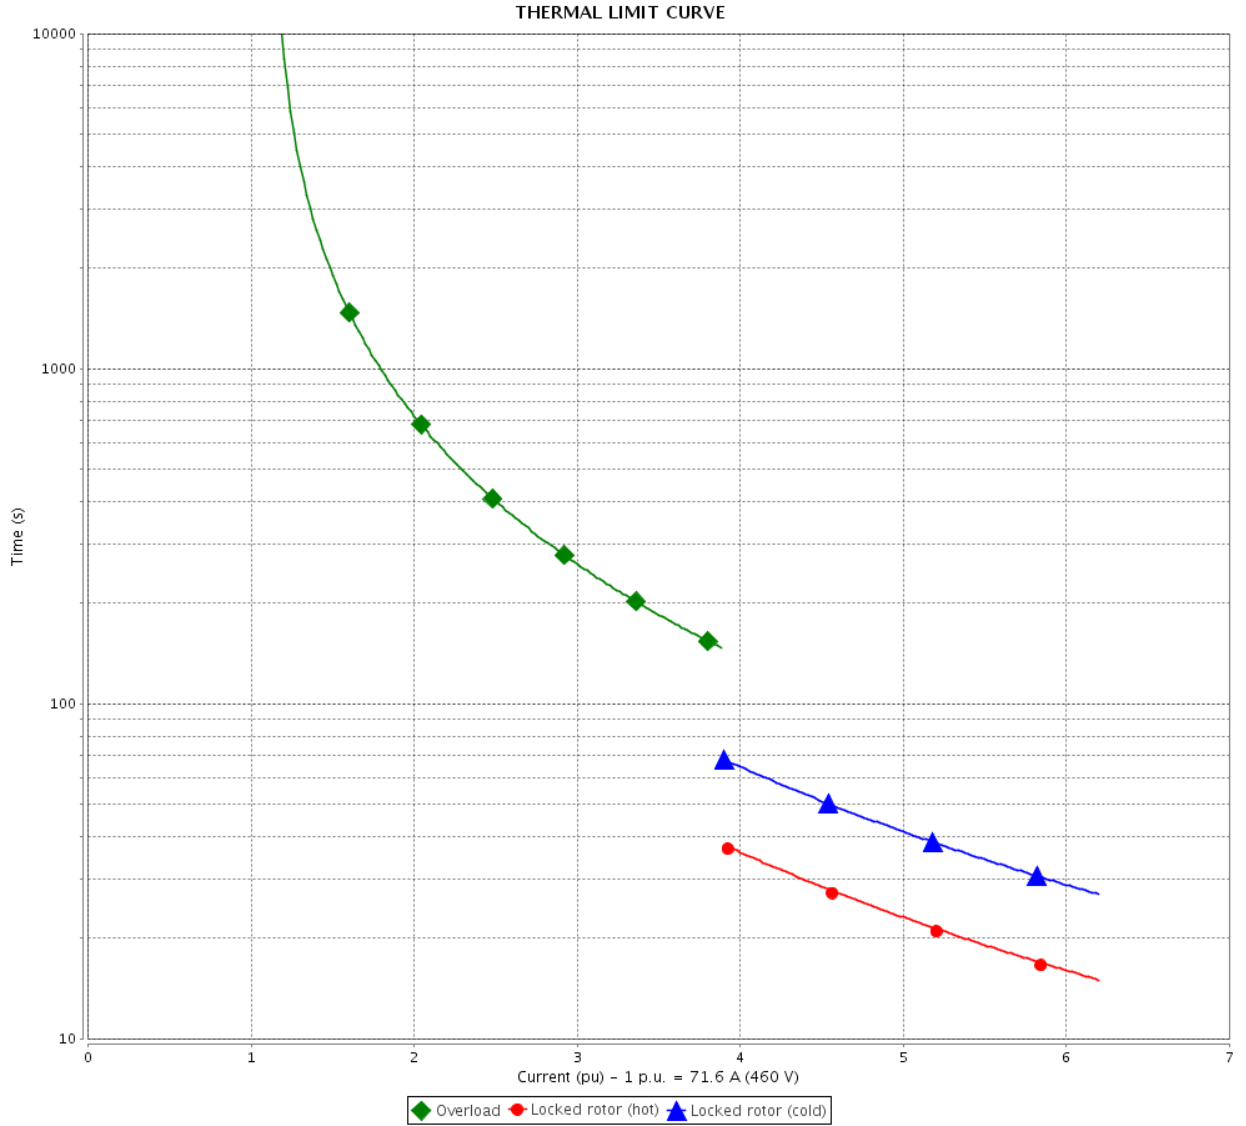

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 6		Revision
Checked by				
Date				

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12205951

Catalog # : 06018ET3E364TC-W22

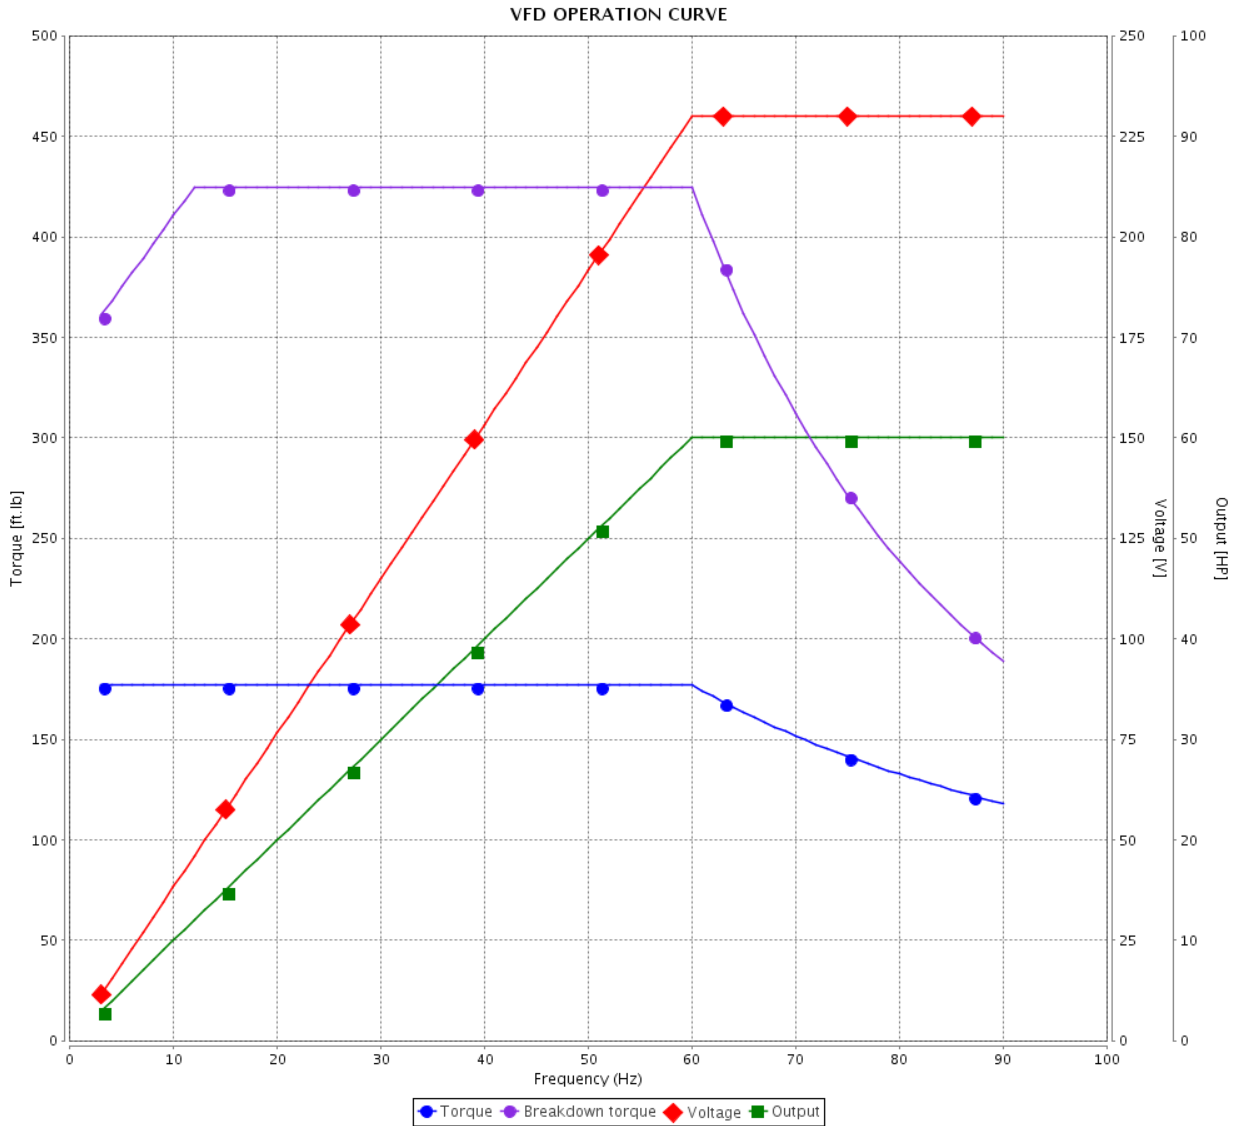

Performance : 230/460 V 60 Hz 4P

Rated current : 143/71.6 A
 LRC : 6.2
 Rated torque : 177 ft.lb
 Locked rotor torque : 220 %
 Breakdown torque : 240 %
 Rated speed : 1780 rpm

Moment of inertia (J) : 22.4 sq.ft.lb
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B



Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	07/07/2020			

1 2 3 4 5 6

A

B

C

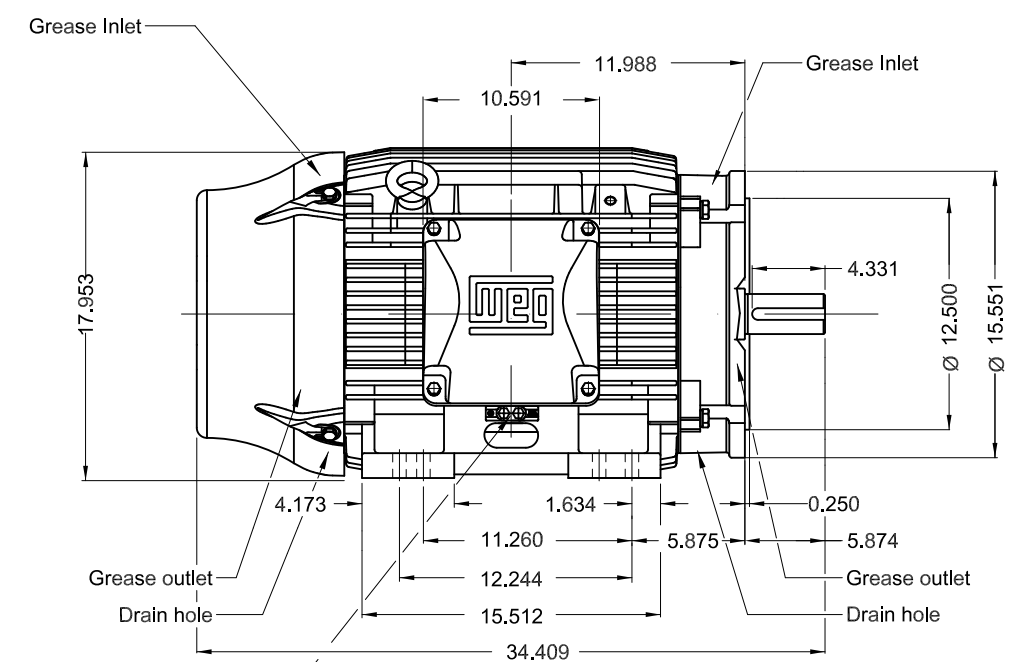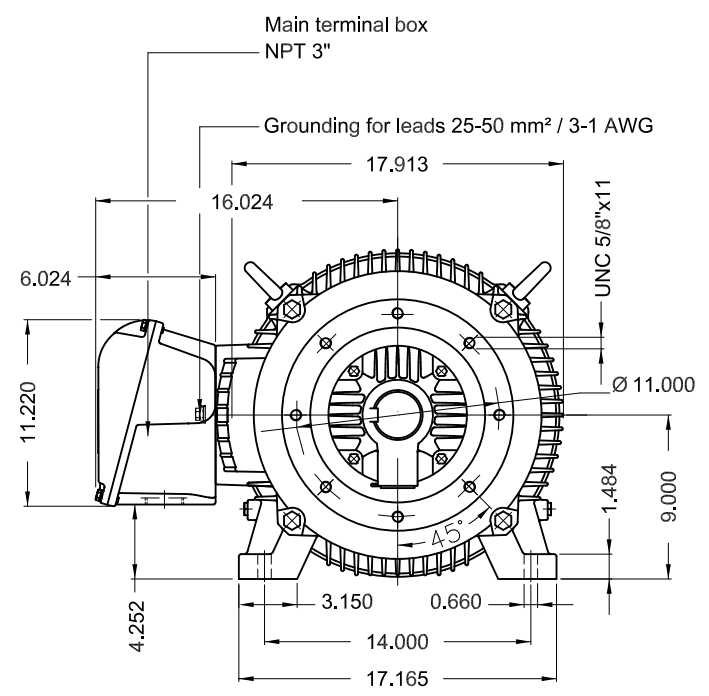


Grounding for leads 25-185 mm² / 3AWG-350MCM

D

E

Without vertical jackscrews
 Color RAL 5009
 Painting plan 203A
 Mounting B34R(D)

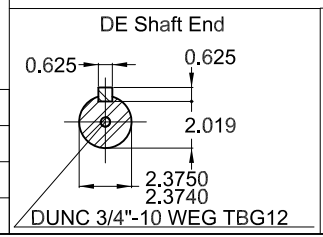

60 HP 04 Poles 60Hz A

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	THREE PHASE W22 MOTOR - NEMA PREMIUM EFF					
CHECKED		FRAME 364/5TC IP55 TEFC					
RELEASED							
REL DT.	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1		

PREVIEW
 WDD



Dimensions in inches XME A3

MODEL 06018ET3E364TC-W22
MADE IN MEXICO
12205951



Inverter Duty Motor
Severe Duty



FOR SAFE AREA
MOD.TE1BFOXON






For 60Hz: Class I, Div 2, Gr. A, B, C and D - T3
Class I, Zone 2, IIC - T3

Class II, Div 2, Gr. F and G - T4

For 60Hz use on PWM, Gr. A, B, C, D and F,
VT 1000:1, CT 20:1, 1.0SF, T3A

PH 3	FR 364/5TC	HP(kW) 60.0(45.0)	Hz 60
V 230/460	A 143/71.6	RPM 1780	DES B
NEMA NOM EFF 95.0 %	INS. CL. F Δ T 80 K	IP55	
ENCL TEFC	DUTY CONT.	AMB. 40°C	
CODE G	PF 0.83	SF 1.25	SFA 179/89.5
USABLE @208V 151 A	SF 1.10	SFA 166	
60HP 45kW 50Hz 380V 86.5A 1470RPM SF1.00 EFF 93.0% (IE1)	ALT 1000 m.a.s.l.	908 Lbs	



MOBIL POLYREX EM
12000 h