




## 34 SERIES™

CAST IRON CONSTRUCTION | ASPHALT PUMP



### FEATURES & BENEFITS

- Fully jacketed pump to rapidly deliver heat directly to the stuffing box, casing and head
- Jacketing suitable for hot oil or steam for enhanced application flexibility
- Simple, economical design for transfer and delivery of asphalt and bitumen at low to moderate pressures

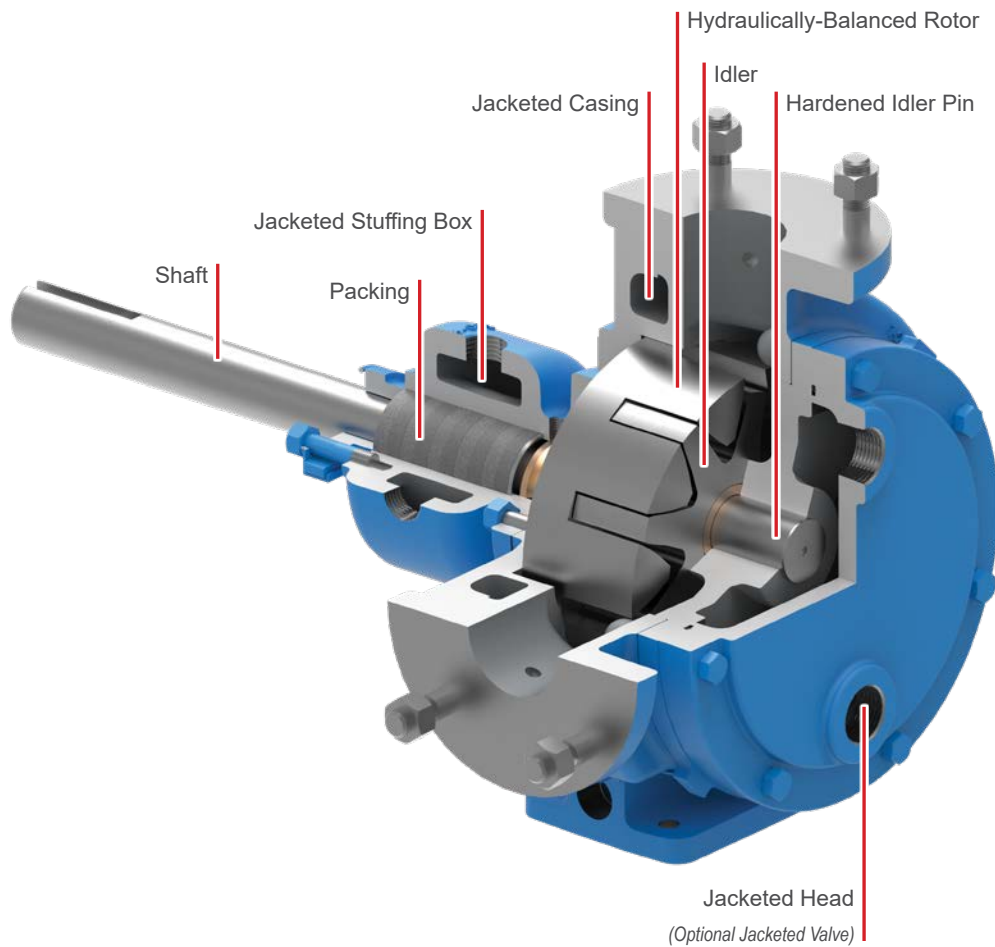

**CAPACITY**  
to 450 GPM  
(102 m<sup>3</sup>/h)



**PRESSURE**  
to 100 PSI  
(7 BAR)



**VISCOSITY**  
28 to 250,000 SSU  
(1 to 55,000 cSt)




**TEMPERATURE**  
-60°F to +450°F  
(-50°C to +230°C)

## PERFORMANCE

MODELS	SPECIFICATIONS				
Jacketed	Performance			Standard Ports	
Packing	Max Speed, RPM	GPM	m <sup>3</sup> /h	Size, Inches	Type
LQ34	420	90	20	2.5	Flange
Q34	350	200	45	3	Flange
M34	280	280	64	4	Flange
N34	280	450	102	5	Flange

## CURVES

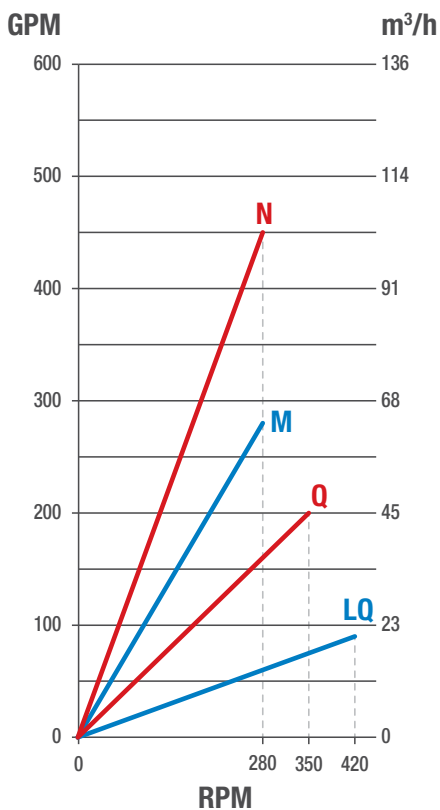

## PORTING

- Right Angle (90°)
- Flanged

## SEALING

- Packing

## MOUNTING

- Foot Mount

## OPTIONS

- Jacketed Internal Relief Valve
- Hardened Part Options
- Plain Head for Externally Lubricated Idler Pin

## DRIVES

- Offset Gear Reducer Drive
- Purchased Gear Reducer Drive
- V-Belt Drive

## TYPICAL APPLICATIONS

- Asphalt
- Bitumen
- Tar
- Pitch
- Bunker Oils
- Residual Oils



**VIKING PUMP, INC.**  
 A Unit of IDEX Corporation  
 406 State Street  
 Cedar Falls, Iowa 50613 U.S.A.  
[vikingpump.com](http://vikingpump.com)

**CONTACT YOUR STOCKING DISTRIBUTOR TODAY**

