



## TRA®20 SERIES™

CIRCUMFERENTIAL PISTON PRODUCT LINE



## FEATURES & BENEFITS

### CLEANABILITY


- CIP (Clean In Place) design optional
- Free draining cover with flat body profile option
- Sealed shaft with o-ring on rotor & rotor nut

### PERFORMANCE

- Efficient handling for low & high viscosity applications
- Exclusive, non-galling WFT 808® alloy rotors standard; permits running at tighter clearances
- High strength 17-4 PH single piece shaft standard
- Improved load carrying capabilities

### EASE OF MAINTENANCE

- Drop-in-place with TRA®10 & comparable manufacturer models
- Interchangeable service parts with comparable manufacturer models
- Stainless steel bearing retainers standard, prevent rusting

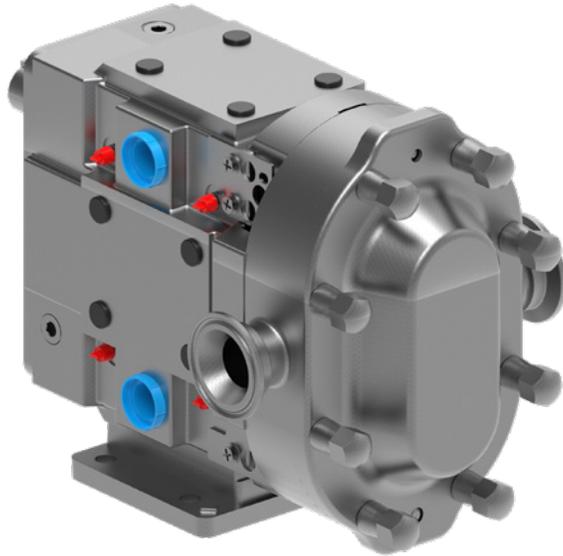

## PERFORMANCE

### MODELS

Model	Displacement		Max Pressure		Max Speed	Standard Ports		Max Capacity	
	USG/rev.	l/rev.	PSI	BAR	RPM	In	mm	GPM	m³/h
0060	0.008	0.03	300	21	1000	1	25.4	8	1.8
0150	0.014	0.052	250	17	800	1.5	38	11	2.5
0180	0.029	0.108	200	14	700	1.5	38	20	4.5
0300	0.06	0.227	250	17	600	1.5	38	36	8.2
0450	0.096	0.366	450	31	600	2	51	58	13.2
0600	0.15	0.568	300	21	600	2.5	64	90	20.4
1300	0.25	0.946	200	14	600	3	76	150	34.1
1800	0.383	1.45	450	31	600	3	76	230	52.2
2100	0.5	1.89	500	34	600	4	102	300	68.1
2200	0.516	1.95	300	21	600	4	102	310	70.4
3200	0.75	2.85	300	21	600	6	152	450	102

### RECTANGULAR FLANGE MODELS

Model	Displacement		Max Pressure		Max Speed	Inlet (WxL)		Outlet		Max Capacity	
	USG/rev.	l/rev.	PSI	BAR	RPM	In	mm	In	mm	GPM	m³/h
0340	0.06	0.23	200	14	400	1.75 x 6.75	44.50 x 171.45	1.5	38.1	24	5.4
0640	0.15	0.57	200	14	400	2.24 x 8.82	56.90 x 224.03	2.5	57.15	60	13.6
1340	0.25	0.95	200	14	400	2.97 x 9.25	75.44 x 234.95	3	76.2	100	22.7
2240	0.52	1.95	200	14	400	3.87 x 11.00	98.30 x 279.40	4	101.6	200	45.4



**CAPACITY**  
to 450 GPM  
(102 m³/h)



**PRESSURE**  
to 500 PSI  
(34 BAR)




**VISCOSITY**  
to 910,000 SSU  
(200,000 cSt)




**TEMPERATURE**  
to +300°F  
(+150°C)

## PORTING


- Complete range of hygienic clamp, screw, flange & industrial screw connections
- Tri-clamp, flanged, DIN, IMDA, NPT, BSP, etc.

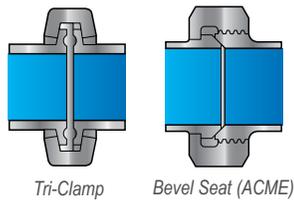

## SEALING



- Single Mechanical
  - Standard Seal Faces: *SiC/SiC*
  - Standard O-rings & Cover Seals: *Buna/FDA*
  - Optional Faces: *Carbon, Ceramic or Chrome Oxide*
  - Optional O-rings & Cover Seals: *FKM, EPDM, Silicone*




- Double Mechanical with Flush
  - Standard Seal Faces: *SiC/SiC/C*
  - Standard O-rings & Cover Seals: *Buna/FDA*
  - Optional Faces: *Carbon, Ceramic or Chrome Oxide*
  - Optional O-rings & Cover Seals: *FKM, EPDM, Silicone*

## GEAR BOX

- 304 stainless steel standard on 0060 - 1800 & 2200 models
- Powder coated cast iron standard on 2100 & 3200 models

## ROTOR & CASING OPTIONS

- 316 stainless steel pump casing standard w/ interior finished to 3-A standards
- Non-galling WFT 808® nickel alloy rotors standard or 316 stainless steel rotors optional
- Optional clearances: front face, hot, high temperature/high viscosity (chocolate)
- Clean In Place (CIP) & flat body profile available
- Twin Wing Rotors Standard
  - Suitable for all liquids, provides minimum pulsation
- Single Wing Rotors Optional
  - Provides reduced shear on shear sensitive fluids or large solids such as fruit pieces, nut kernels, cheese curds or meats

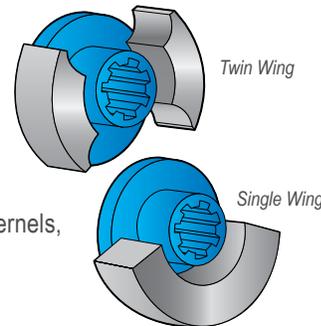

## MOUNTING

- A gear case that can be mounted in any of four positions allows for horizontal or vertical porting, flexibility in drive shaft positioning to match reducer or gear motor input & improved access to grease fittings

## CIP FEATURES AVAILABLE

- Flat body profile
- CIP holes in body and rotors
- Vertical port mounting
- Extra clearance rotors

## TYPICAL APPLICATIONS

- Dairy      Foods      Pharmaceutical
- Bakery      Confectionary
- Meat Processing      Personal Care

## WHY REMANUFACTURE?

- Worn pump is returned to **like-new condition & performance**
- Your remanufactured pump carries a **full 1 year factory warranty**
- All remanufactured pumps are **tested & certified**
- Save big** compared to purchasing an entirely new pump
- Pumps can be remanufactured **up to four times**, depending on model & wear

# VIKING PUMP®

VIKING PUMP, INC.  
A Unit of IDEX Corporation  
406 State Street  
Cedar Falls, Iowa 50613 U.S.A.  
[vikingpump.com](http://vikingpump.com)

**CONTACT YOUR STOCKING DISTRIBUTOR TODAY**

GLOBAL LEADER IN POSITIVE DISPLACEMENT PUMPING SOLUTIONS: Cedar Falls, Iowa, USA | Windsor, Ontario, Canada | Shannon, Ireland | Eastbourne, United Kingdom

© Copyright 2024 Viking Pump, Inc. All Rights Reserved. Rev0124 | Form No. 1721