



STOP!

STOP THROWING AWAY PUMPS!

MAXIMIZE YOUR FLEET'S EFFICIENCY & STOP THROWING MONEY DOWN THE DRAIN

**MORE
INFO**




BAM!

FEATURES & BENEFITS

- 2" models with flows up to 135 GPM (30 m³/h)
3" models with flows up to 170 GPM (38 m³/h)
- Easily displace competitor pumps with a drop in 4-bolt mount
- Maintenance-friendly and rebuildable with basic tools
- New PTFE double lip seal design provides a wide range of compatibility
 - » The seal features low friction and high wear resistance for longer life and dry run durability
 - » The seal behind the rotor isolates shaft bearing so only one bearing contacts the fluid
- Modular porting = flexibility
- Bi-directional*
- Hydraulic mounting bracket with rigid coupling available

** Internal relief valve will only provide protection in one direction*

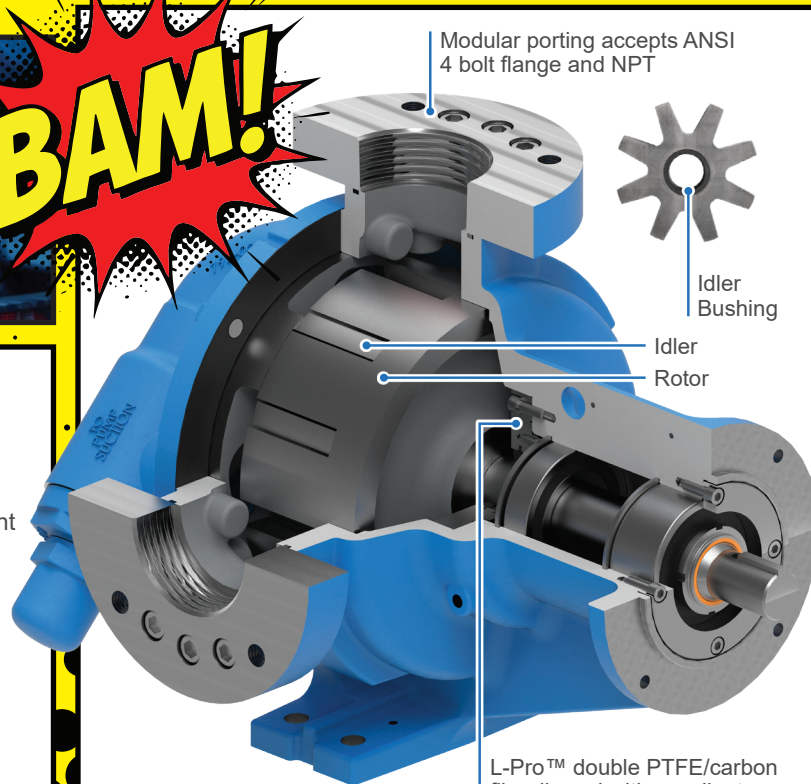

RTP_g SERIES™

Internal Gear Truck Pump

VIKING PUMP®

vikingpump.com