

MODELS: GB-425021-R0O-D, GB-425021-R1O-D

STATE Released 07/19/2023 DIMENSIONS ARE IN INCHES INCHES PROJECT: E324 PUMP WAS: EX-E324-501

DIMENSIONS ARE IN INCHES VIKING PUMP, INC. AND DETAIL. IS PROPREITY OF VIKING PUMP, INC. AND DETAIL. IS PROPREI

2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.

VG. NO. SHEET 1 OF 1 REV. A.1 07/19/2023

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer Product line : W22 NEMA Premium Efficiency Product code: 11408296 Three-Phase Catalog #: 35012ET3G449T-W22 Frame : L447/9T Locked rotor time : 41s (cold) 23s (hot) Output : 350 HP (260 kW) Temperature rise : 80 K Poles Duty cycle : Cont.(S1) : -20°C to +40°C Frequency : 60 Hz Ambient temperature Rated voltage : 460 V : 1000 m.a.s.l. Altitude : 415 A Rated current Protection degree : IP55 L. R. Amperes : 2864 A Cooling method : IC411 - TEFC : 6.9x(Code H) LRC Mounting : F-1 No load current : 160 A Rotation¹ : Both (CW and CCW) Rated speed : 1190 rpm Noise level² : 71.0 dB(A) Starting method Slip : 0.83 % : Direct On Line Rated torque : 1520 ft.lb Approx. weight³ : 3582 lb Locked rotor torque : 250 % Breakdown torque : 270 % Insulation class : F Service factor : 1.15 Moment of inertia (J) : 278 sq.ft.lb Design 25% 50% 75% 100% Output Foundation loads 95.8 : 10936 lb Efficiency (%) 95.3 95.4 95.8 Max. traction Power Factor 0.82 : 14518 lb 0.42 0.66 0.77 Max. compression Non drive end Drive end 6319 C3 Bearing type 6322 C3 Sealing WSeal WSeal Lubrication interval 11000 h 13000 h Lubricant amount 60 g 45 g Lubricant type Mobil Polyrex EM

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.		Changes Summary	Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	27/04/2018			1 / 4	

TORQUE AND CURRENT VS SPEED CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency

Three-Phase

Product code: 11408296

Catalog #: 35012ET3G449T-W22

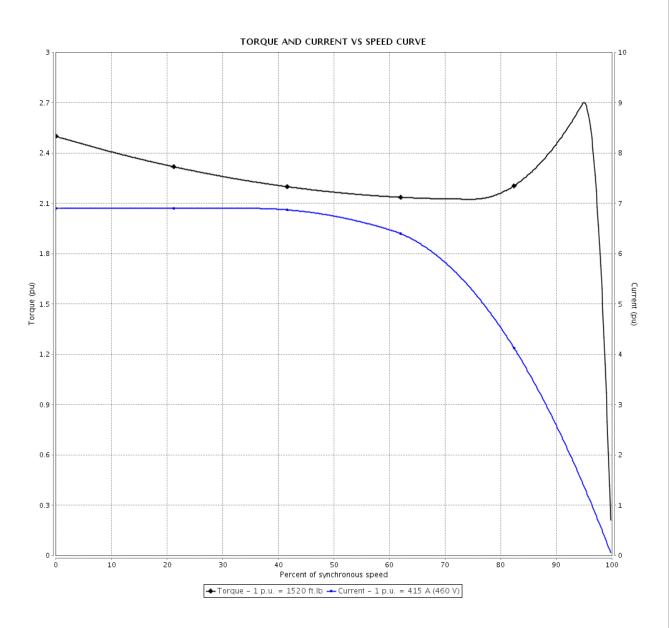

Performance	: 460 V 60 Hz 6P			
Rated current	: 415 A	Moment of inertia (J)	: 278 sq.ft.lb	
LRC	: 6.9	Duty cycle	: Cont.(S1)	
Rated torque	: 1520 ft.lb	Insulation class	: F	
Locked rotor torque	: 250 %	Service factor	: 1.15	
Breakdown torque	: 270 %	Temperature rise	: 80 K	
Rated speed	: 1190 rpm	Design	: A	
•	<u> </u>			

Locked rotor time : 41s (cold) 23s (hot)

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	27/04/2018			2/4	

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 NEMA Premium Efficiency Product

Three-Phase

Product code: 11408296

Catalog #: 35012ET3G449T-W22

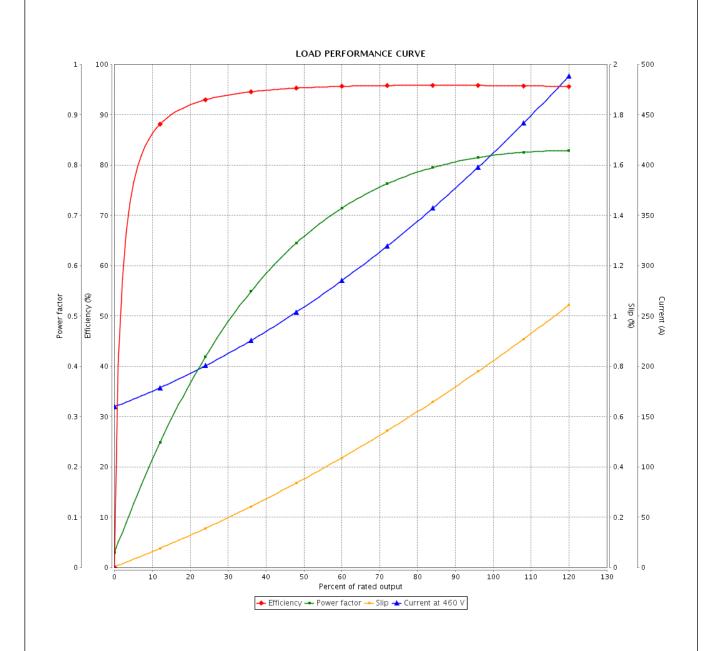

Performance	: 4	: 460 V 60 Hz 6P						
Rated current	: 4	: 415 A Moment		f inertia (J)	: 278 sq.ft.lb			
LRC		.9	Duty cycle		: Cont.(S1)			
Rated torque		520 ft.lb	0 ft.lb Insulation class		: F			
Locked rotor torque	e : 2	50 %	Service factor		: 1.15			
Breakdown torque	: 2	70 %	Temperature rise		: 80 K			
Rated speed	: 1	: 1190 rpm		Design				
Rev.		Changes Summary		Performed	Checked	Date		
Performed by								
Checked by		1			Page	Revision		
Date	27/04/2018				3/4			

VFD OPERATION CURVE

Three Phase Induction Motor - Squirrel Cage




Customer

Product line : W22 NEMA Premium Efficiency

Three-Phase

Product code: 11408296

Catalog #: 35012ET3G449T-W22

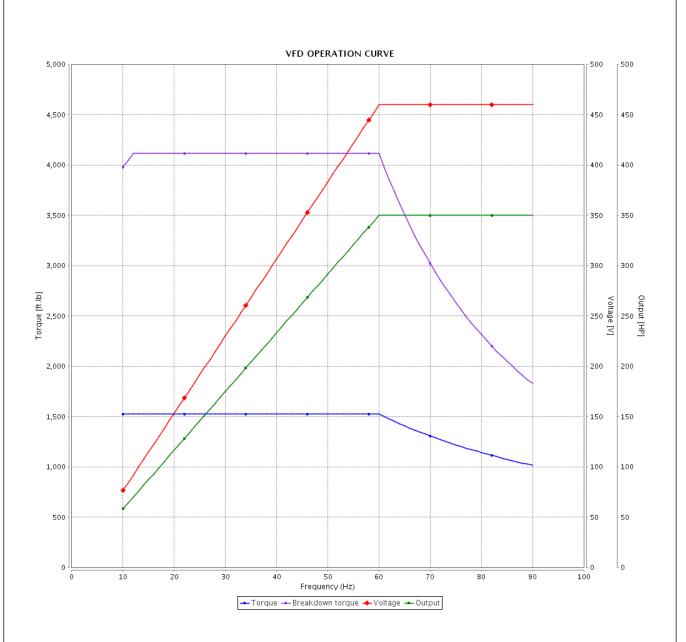

Performance : 4		: 460 V 60 Hz 6P						
Rated current : 4		15 A	Moment of	Moment of inertia (J)				
LRC : 6.		9	Duty cycle	Duty cycle				
Rated torque : 1		520 ft.lb	Insulation class		: F			
Locked rotor torqu	ie : 2	50 %	Service factor		: 1.15			
Breakdown torque	e : 2º	70 %	Temperature rise		: 80 K			
Rated speed	: 1	: 1190 rpm			: A			
Rev.		Changes Summary		Performed	Checked	Date		
Performed by								
Checked by					Page	Revision		
Date	27/04/2018	1			4/4			

