

WIRELINE AND PERFORATING

175 RockJet™ HMX perforating charge

Reservoir performance optimized shaped charges

FEATURES

- Developed to maximize performance in stressed rock targets—NOT concrete
- Patented charge-securing design to reduce gun debris
- Compatible with multiple gun systems

BENEFITS

- Maximizes penetration into real, stressed reservoir rock
- Increases well productivity and injectivity

APPLICATIONS

- Natural completion or stimulation wells
- Production and injection
- Any perforating gun conveyance method


Overview

RockJet™ perforating charges provide the deepest penetration in downhole stressed rock to help optimize well performance.

Traditional surface tests performed in concrete targets are not a reliable indicator of downhole charge performance. Inflow models demonstrate that maximum reservoir contact through deep and clean perforating tunnels, extending past the damage zone, is critical to maximize the productivity and injectivity of natural completion wells.

The 175 RockJet™ HMX perforating charge was developed with stressed rock cores for optimized performance in downhole conditions, with the exclusive capabilities of the Advanced Perforating Flow Laboratory at the Jet Research Center. This charge was developed for optimized performance in actual downhole well conditions.

175 RockJet charge performance was confirmed with third party witnessed testing under APIs new RP19B Section 2 protocol.

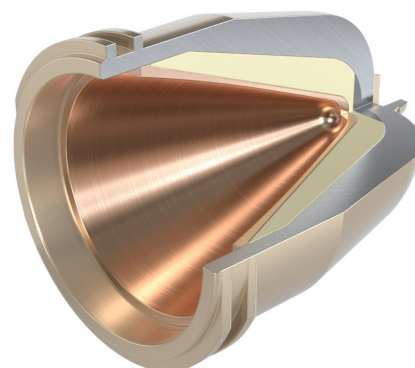


Compatible gun systems specifications

GUN OD (IN.)	SPF	PHASING (°)	PRESSURE RATING (PSI)	TENSILE RATING (LB)	NOMINAL LENGTH (FT)	CHARGE	POST-SHOT SWELL OD (IN.)
2 7/8	6	60, 99	20,000 to 27,000	130,000 to 143,000	4, 8, 11, 16, 22, 28	175 RockJet™ HMX, 175 gm SAP No. 103254898	3.07 (fluid)
3 1/8	6	60, 99	18,000 to 25,000	97,000 to 149,000	2, 4, 7, 11, 15, 16, 21, 22		3.380 (fluid) 3.304 (air)
3 1/8 G-force	4	10, 350	19,000	148,000	4, 16, 22		3.4 (fluid)
3 1/8 G-force inclined	4	0, 0 - 180	19,000	148,000	7.8, 15, 22		3.342 (air)
4 1/2	12	30, 150	13,000	274,000	4, 8, 11, 16, 22		4.74 (fluid)
4 5/8	12	30, 150	15,000 to 19,000	284,000 to 377,000	4, 8, 11, 16, 22		4.805 (fluid)
4 3/4	12	30, 150	22,000	516,780	8, 11, 16, 22		4.922 (fluid)

175 RockJet™ HMX perforating charge results

Witnessed API Section-2 testing results vs. leading DP charge (38 in. in API Section-I)


Penetration performance

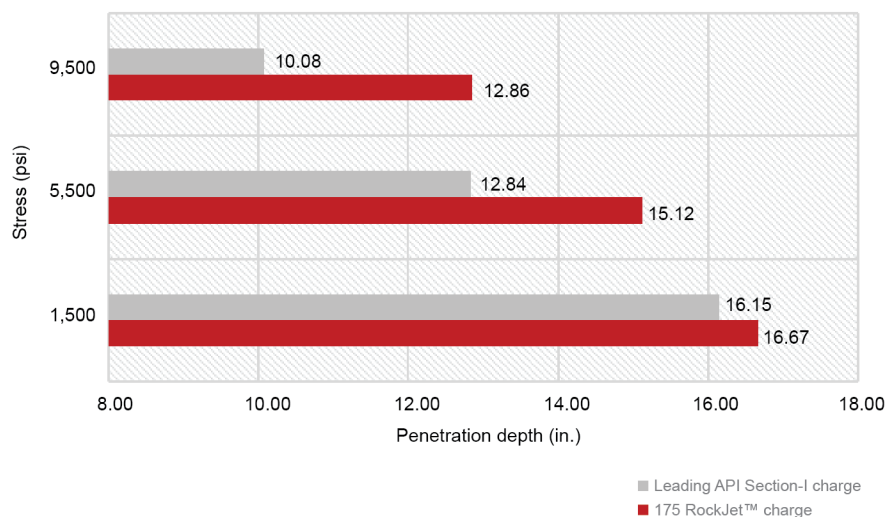

27.7%

Deeper
penetration into
stressed rock

Penetration increase vs. leading S1 shaped charge

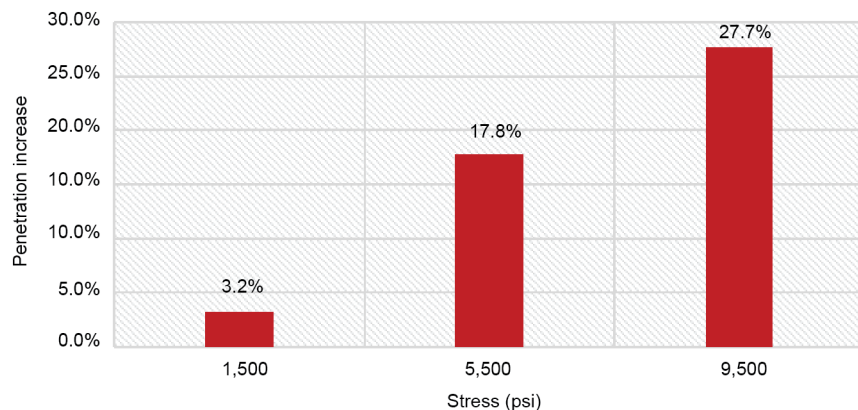

For more information, contact your local Halliburton representative or visit us on the web at www.halliburton.com

Sales of Halliburton products and services will be in accord solely with the terms and conditions contained in the contract between Halliburton and the customer that is applicable to the sale.

H014713 07/25 © 2025 Halliburton. All Rights Reserved.

halliburton.com

HALLIBURTON