

SLICKLINE SERVICES

Otis® a type tubing perforator punch

Mechanical intervention


The Halliburton Otis® A Type Tubing Perforator Punch is a mechanical device designed to perforate standard and heavy wall tubing, under pressure. Deployed into the well by conventional means, the perforator punch requires no explosives, eliminating the possibility of perforating the casing.

The design benefits of the perforator punch include:

- Greater tubing penetration
- Positive indication of perforation on tool removal
- Safety release mechanism, enabling the tool to be retrieved from the well without perforating
- Designed to withdraw the punch and release automatically after perforating
- Utilizes upward jarring impacts for perforation action

The perforator is used with a tubing collar or slip type stop, which provides an anchor that enables upward jarring to activate the perforator.

When ordering please specify tubing size, weight, and grade.

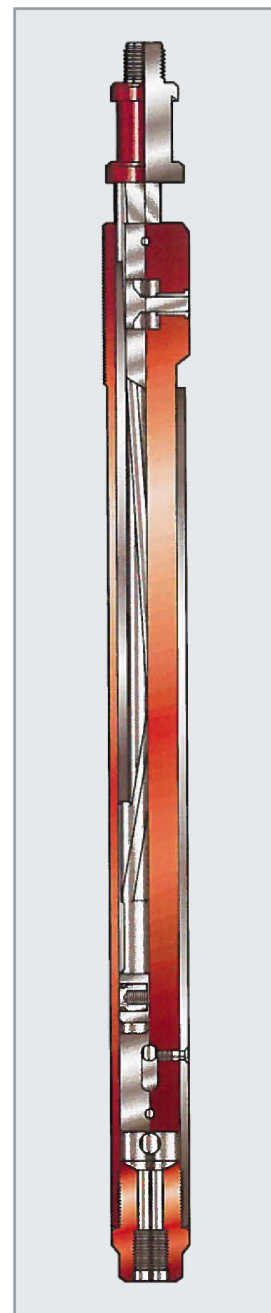

DATA SHEET

HALLIBURTON Otis® A TYPE TUBING PERFORATOR PUNCH								
NOMINAL SIZE	PART NUMBER	SAP PART NUMBER	TOP CONNECTION	BOTTOM CONNECTION	FISHING NECK	EXTENDED MAXIMUM LENGTH	EXTENDED PUNCH (OD)	RETRACTED PUNCH (OD)
1.250 in.	62A029	28493	5/8 in. 11 UN	3/4 in. 10 UN	1.000 in.	30.75 in.	1.580 in.	1.230 in.
1.500 in.	62A019	101015759	15/16 in. 10 UN	5/8 in. 11 UN	1.188 in.	35.19 in.	1.812 in.	1.469 in.
2.000 in.	62A024	101015761	15/16 in. 10 UN	15/16 in. 10 UN	1.375 in.	38.81 in.	2.250 in.	1.839 in.
2.500 in.	62A011	101064631	15/16 in. 10 UN	15/16 in. 10 UN	1.375 in.	29.62 in.	2.688 in.	2.125 in.
2.500 in.	62A020	101015760	15/16 in. 10 UN	15/16 in. 10 UN	1.375 in.	44.34 in.	2.781 in.	2.201 in.
3.000 in.	62A01	101064630	1 1/16 in. 10 UN	1 1/16 in. 10 UN	2.312 in.	50.87 in.	3.344 in.	2.688 in.
3.000 in.	62A026	101064632	1 1/16 in. 10 UN	1 1/16 in. 10 UN	2.312 in.	51.00 in.	3.344 in.	2.810 in.
4.500 in.	62A028	101064634	1 1/16 in. 10 UN	1 1/16 in. 10 UN	2.312 in.	53.00 in.	4.400 in.	3.650 in.
4.000 in.	62A027	101064633	1 1/16 in. 10 UN	1 1/16 in. 10 UN	3.125 in.	51.54 in.	4.370 in.	3.750 in.
5.000 in.	62A030	101064635	1 1/16 in. 10 UN	1 1/16 in. 10 UN	3.125 in.	64.22 in.	5.000 in.	4.110 in.
5.500 in.	62A033	101064636	1 1/16 in. 10 UN	1 1/16 in. 10 UN	3.125 in.	61.42 in.	5.640 in.	4.550 in.

Spares components are available. Please specify part and assembly part number or part number if known.

For more information, contact your local Halliburton representative or visit us on the web at www.halliburton.com

Sales of Halliburton products and services will be in accord solely with the terms and conditions contained in the contract between Halliburton and the customer that is applicable to the sale.

H011359 02/25 © 2025 Halliburton. All Rights Reserved.

halliburton.com

HALLIBURTON