

LOW CARBON SOLUTIONS | CCUS

XTR™ CS injection valve

For use in CCUS wells where reliability, high injection rates, and low pressure drops are required

FEATURES

- Depth insensitive
- Minimized leak paths
- Large flow area
- Self-cleaning design
- Full metal-to-metal body
- Metal-to-metal poppet sealing
- Low opening pressure
- Anti-throttling mechanism
- Wireline deployment

BENEFITS

- Simplifies inventory and planning; installable at any depth
- High injection rates
- Smooth flow, minimal pressure drop, reduced erosion
- Bypass ports reduce debris buildup
- Longevity and erosion protection
- Optimal sealing when closed
- Opens with minimal flow
- Patented anti-throttling keeps valve open, reduces wear
- Easy installation, repositioning, and retrieval



XTR™ CS injection valve

Overview

The XTR™ CS injection valve is a compact, spring-loaded, full metal-to-metal design engineered for CO₂ injection and CCUS wells where reliability, high injection rates, and low-pressure drops are critical.

Qualified for extreme temperature environments, the valve is deployed as part of the XTR™ CS injection system, which includes a non-elastomeric lock mandrel/landing nipple. The valve remains closed via a spring-loaded metal-to-metal poppet and seat mechanism. Upon injection, the poppet is easily displaced to allow smooth flow. As flow increases, a proprietary anti-throttling mechanism helps ensure the valve stays fully open to minimize chatter and extend service life. When injection stops, the spring returns the poppet to its seat to help prevent backflow.

The XTR CS injection system offers a robust solution for ultralow-temperature CO₂ injection, serving as a primary non-return valve, contingency insert valve, or deep-set flowback prevention device. The valve's depth-insensitive design allows installation at any point in the wellbore without adjustment to simplify planning and logistics, while also eliminating concerns about hydraulic fluid mobility at CCUS temperatures, which can impact the functionality of surface controlled wireline deployed options.

Debris and flow


Poor injection medium cleanliness is a leading cause of injection valve failure. To combat this, the XTR CS injection valve incorporates cleanout jetting ports in its main body to minimize debris buildup. Additionally, specialized materials protect key components exposed to flow, which safeguards sealing surfaces from erosional damage—especially in high-debris environments. The poppet geometry is also optimized to deflect solids away from the seal face to provide further erosion resistance during injection.

Applications

- CO₂ injection
- Gas injection
- Water injection
- Primary “non-return” valve
- Contingency insert valve
- Steam injection
- Flowback prevention

Specifications

- Operating temperature range: -31 to 350°F
- Survivability temperature rating: -109°F
- Pressure rating: up to 10,000 psi
- Flow rating: up to 2.5 MTPA
- API 14A validation grade: V3-R
- Non-elastomeric seal stack qualified per API 14L V0

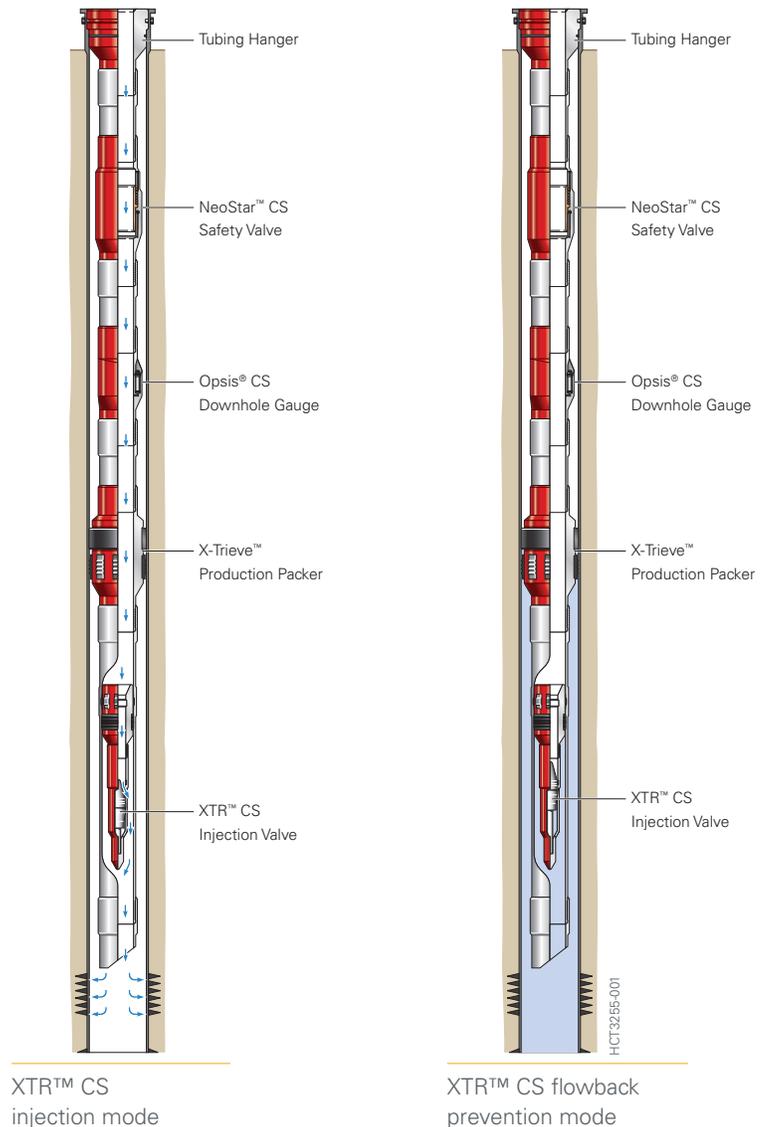

For more information, contact your local Halliburton representative or visit us on the web at www.halliburton.com

Sales of Halliburton products and services will be in accord solely with the terms and conditions contained in the contract between Halliburton and the customer that is applicable to the sale.

H015021 04/26 © 2026 Halliburton. All Rights Reserved.