



# SpaceSaver<sup>®</sup> Electric Water Heaters

## DESIGNED FOR PERFORMANCE



- Glass-lined tanks for longer life
- Meets latest energy efficiency standards
- Factory-installed plastic-lined nipples
- Isolated base for added energy efficiency
- Thermostatically controlled long life elements
- CFC-free foam insulation
- Personnel protector covers elements and controls

## EASY TO INSTALL AND REPAIR

- Conveniently located T&P and drain valve
- Removable anodes

## WARRANTY\*

- 6-year limited tank warranty
- 1-year limited parts warranty

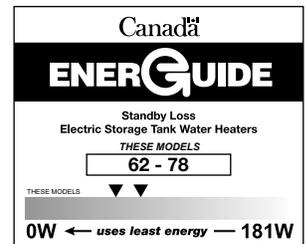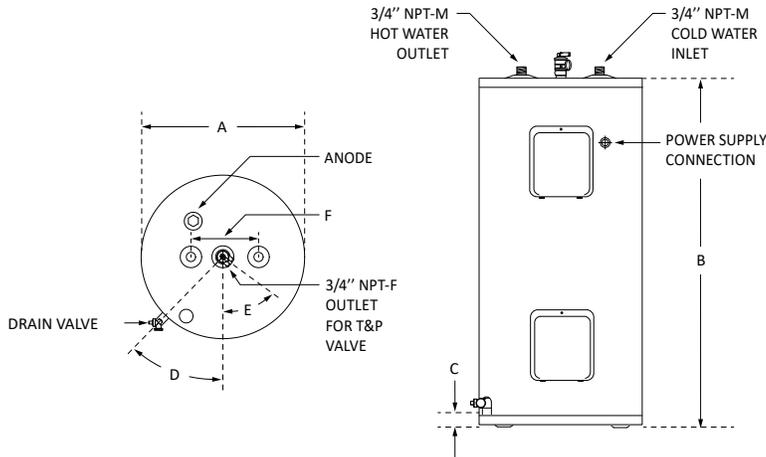

SPECIFICATIONS														
Model	Series	Capacity			Input		Standby Loss	A Diameter	B Height	C	D	E	F	Shipping Weight
		IG	USG	L	WATTS	VOLTS								
TOP ENTRY														
SS650SDEQC-30	250	41	49	184	3,000*	240	62	22 (56)	49 3/4 (125)	2 1/2 (6)	45°	52°	8 (20)	140 (64)
SS680TDEQC-45	250	61	74	279	4,500**	240	78	24 (61)	59 3/4 (152)	2 1/2 (6)	45°	52°	8 (20)	185 (84)

\*Model is dual-rated. At 208V wattage is 2253.  
 \*\*Model is dual-rated. At 208V wattage is 3380.

\*In residential applications. Reduced warranty in commercial applications.