



Enhancing everyday living



ENGINEERING SUBMITTAL DATA SHEET

Commercial electric water heaters, Flexible
105 MODELS (Heavy Duty)

40 imperial gallons / 184 litres

Insulated with 2" Eco-Friendly **GREENFOAM**

208, 240, 277 & 480 Volts


These models meet the safety and construction requirements of CSA Standard C22.2 No. 110 and meet or exceed the standby loss requirements of NRCan and ASHRAE 90.1 Standard.

Models*	Input (kW)	Amperage				Phase(s)	Number of elements	
		208 Volts	240 Volts	277 Volts	480 Volts			
Heavy Duty with 3, 6, or 9 elements								
1053Y-1-6S	6	28.8	25.0	21.7	12.5	1	3	
1053Y-3-6S		16.7	14.5	—	7.2	3		
1053Y-1-9S	9	43.3	37.5	32.5	18.8	1		
1053Y-3-9S		25.0	21.7	—	10.8	3		
1053Y-1-12S	12	57.7	50.0	43.3	25.0	1		
1053Y-3-12S		33.3	28.9	—	14.4	3		
1053Y-1-13.5S	13.5	64.9	56.3	48.7	28.1	1		
1053Y-3-13.5S		37.5	32.5	—	16.2	3		
1053Y-1-15S	15	72.1	62.5	54.2	31.3	1		
1053Y-3-15S		41.6	36.1	—	18.0	3		
105XY-1-18S	18	86.5†	75.0	65.0	37.5	1		3 or 6
105XY-3-18S		50.0†	43.3	—	21.7	3		
1056Y-1-24S	24	115.4	100.0	86.6	50.0	1	6	
1056Y-3-24S		66.6	57.7	—	28.9	3		
1056Y-1-27S	27	129.8	112.5	97.5	56.3	1		
1056Y-3-27S		74.9	65.0	—	32.5	3		
1056Y-1-30S	30	144.2	125.0	108.3	62.5	1		
1056Y-3-30S		83.3	72.2	—	36.1	3		
105XY-1-36S	36	173.1††	150.0	130.0	75.0	1	6 or 9	
105XY-3-36S		99.9††	86.6	—	43.3	3		
1059Y-1-40.5S	40.5	194.7	168.8	146.2	84.4	1	9	
1059Y-3-40.5S		112.4	97.4	—	48.7	3		
1059Y-1-45S	45	216.3	187.5	162.5	93.8	1		
1059Y-3-45S		124.9	108.3	—	54.1	3		
1059Y-1-54S	54	—	255.0	194.9	112.5	1		
1059Y-3-54S		—	129.9	—	65.0	3		

* Replace the "X" in the model number by the element quantity shown in the "Number of elements" column as well as the "Y" by the letter referring to its voltage (refer to the following "Voltage index" as well as the "Model Number Structure" for further details).

† For 208 V Models with a 18 kW input, only the 6-element configuration is possible.

†† For 208 V Models with a 36kW input, only the 9-element configuration is possible.

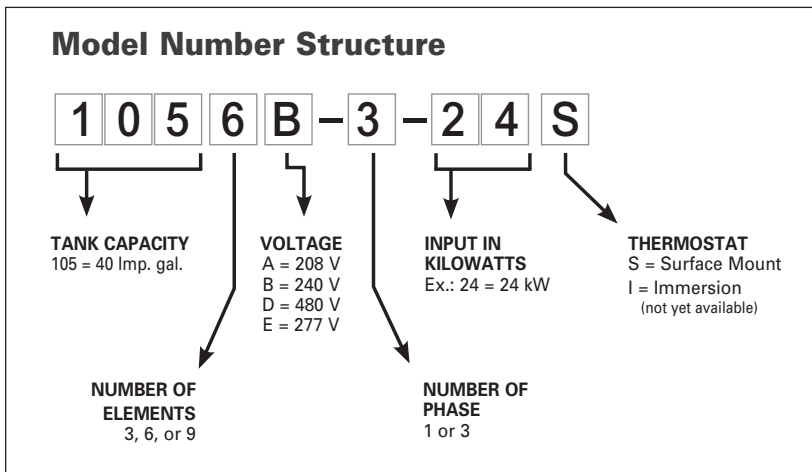

Voltage index	
A	208 Volts
B	240 Volts
D	480 Volts
E	277 Volts


See reverse for this model drawing as well as order details.

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com



40 Lesage Avenue, Montréal-East (Québec) Canada H1B 5H3 • Telephone: (514) 645-8893 • Fax: (514) 640-0969

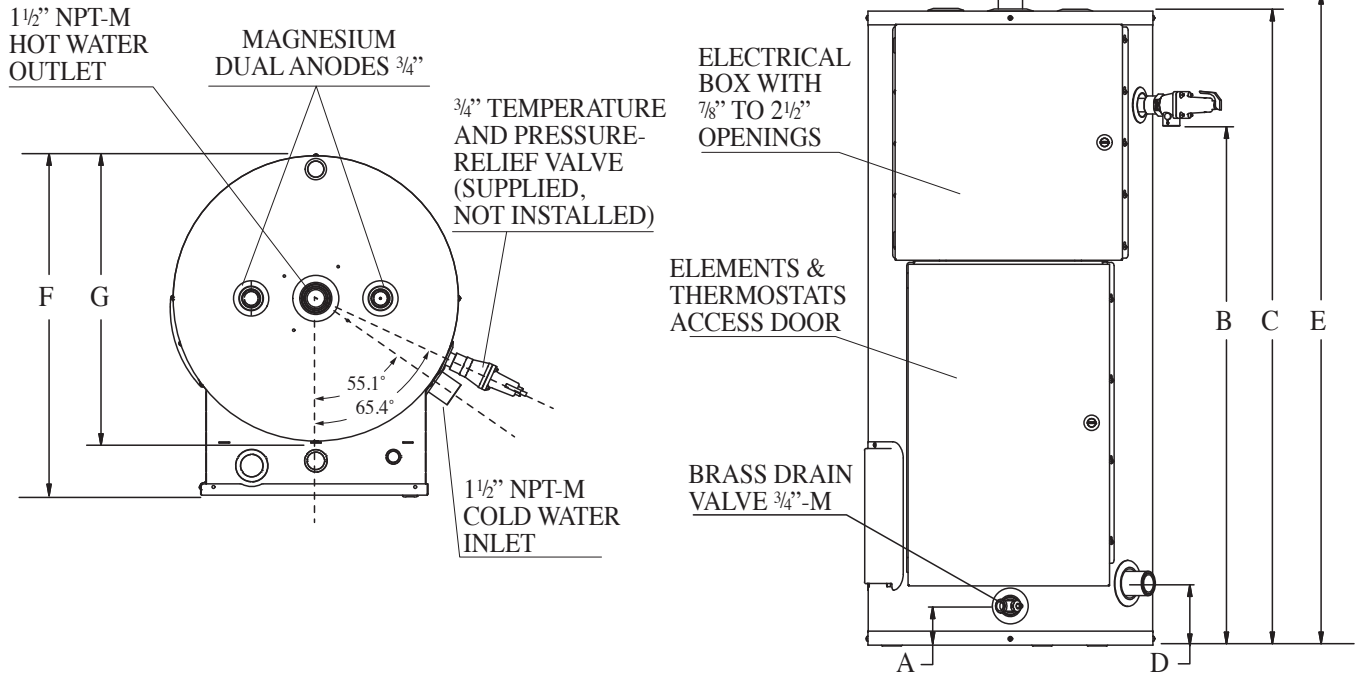

Models	Storage Capacity			A Inches (cm)	B Inches (cm)	C Inches (cm)	D Inches (cm)	E Inches (cm)	F Inches (cm)	G Inches (cm)	Est. Ship. Weight	
	Imp. gal.	Litres	U.S. gal.								lb.	kg
All 105	40	184	49	3 1/8 (7.9)	40 3/16 (102.1)	49 1/8 (124.8)	4 7/8 (12.4)	50 3/4 (129)	26 1/4 (66.7)	22 (55.9)	230	104

Notes: _____

JOB TITLE _____

SUBMITTED DATE _____

ADDRESS _____

REQUIRED PRODUCT _____

CONTRACTOR _____

MODEL NO. _____ SIZE _____ QUANTITY _____

ADDRESS _____

MODEL NO. _____ SIZE _____ QUANTITY _____

ENGINEER _____

MODEL NO. _____ SIZE _____ QUANTITY _____

MODEL NO. _____ SIZE _____ QUANTITY _____

REQUIRED DATE _____

In accordance with our company policy of on-going product improvement, Giant Factories Inc. reserves the right to make changes without prior notice.

giantinc.com